


BQC

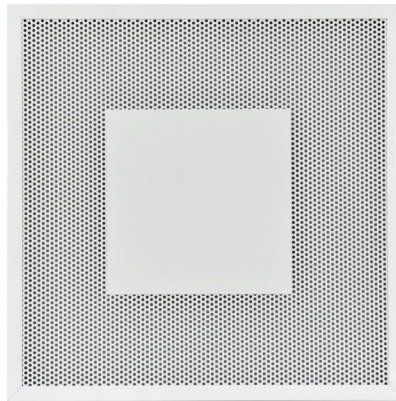

Eigenschaften: Quadratische gelochte Luftdurchlässe, mit mittlerer Platte, Abm. 595x595mm extern Rahmen.

Konstruktion Aluminiumrahmen, Lochblech aus weiß lackiertem Stahl RAL 9016 matt.

Verwendung: an der Decke, in Zuluft und Abluft. Einbauhöhe: 2,5-4,0 m.

Befestigung: Clips (mit frontalen Schraubenbohrungen auf Anfrage).

Zubehöre:

- Luftverteilerkasten aus verzinktem Stahl:
 - Mit oder ohne Isolierung.
 - Mit oder ohne Strömungsgleichrichter.
- Mengeregulierung aus verzinktem Stahl mit Lamellen mit gegenläufigem Betrieb.
- Leitbleche zur Ausrichtung des Wurfs.

Characteristics: perforated face square diffusers with central part, 595x595 mm overall size.

Finishing: frame in aluminium, perforated sheet steel painted white RAL 9016 matt.

Utilization: For ceiling installation. For supply air and return air. Installation height: 2,5-4,0 m.

Fixing: clips (through holes on request).


Accessories:

- Galvanized steel plenum:
 - With or without insulation.
 - With or without equalizer sheet.
- Calibration damper made of galvanized steel and opposed blades.
- Deflectors for adjusting throw directions.


MODELLE | MODELS

BQCM	Luftdurchlass mit gelochtem Frontdurchlass mit mittlerer Platte und Aluminiumrahmen und Leitblechen Perforated face square diffuser with central part with aluminium frame and deflectors
BQCR	Luftdurchlass mit gelochtem Frontdurchlass mit mittlerer Platte und Aluminiumrahmen, ohne Leitbleche Perforated face square diffuser with central part with aluminium frame and without deflectors

ZEICHNUNGEN | DRAWINGS



LUFTVERTEILERKASTEN | PLENUM

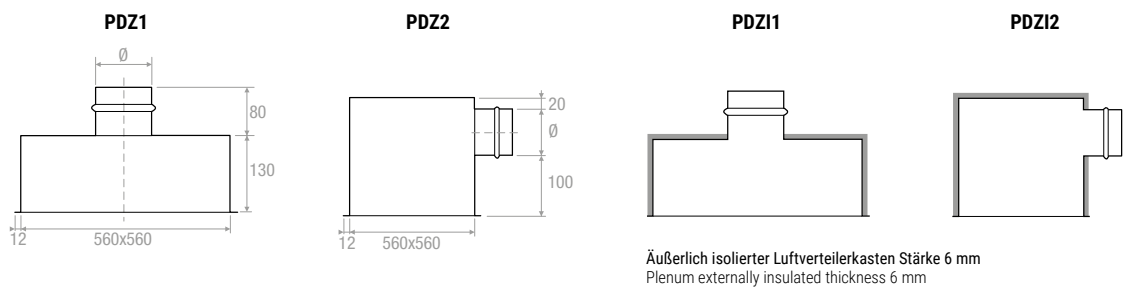

AUSWAHLTABELLE | TECHNICAL DATA

Modell Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)}-Y_{(0,25)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQCM	0,1044	590	1310	36	62	1,8	4,0	10	50
BQCR	0,1044	390	880	< 20	30	-	-	10	50

PREISE | PRICES

						
Zuluft Supply BQCM Mit Leitblech With deflectors	Abluft Return BQCR Ohne Leitblech Without deflectors	SC	PDZ1	PDZI1	PDZ2	PDZI2
€	€	€	€	€	€	€
595x595 extern Rahmen overall size						