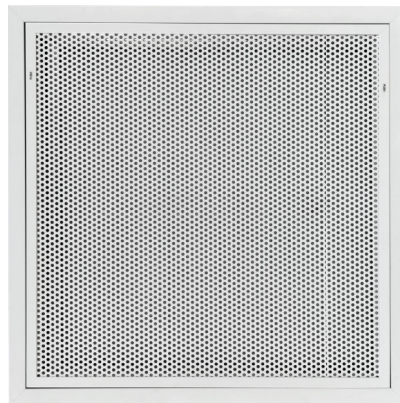


BQF60SMF

Eigenschaften: Quadratische gelochte Luftdurchlässe-Filterhalter, für Zwischendecke Abm. 595x595mm extern Rahmen.

Konstruktion: Aluminiumrahmen, Lochblech aus matt, weiß RAL 9016 lackiertem Stahl.

Verwendung: An der Decke in Abluft. Einbauhöhe: 2,5-4,0 m.

Befestigung: Clips (mit frontalen Schraubenbohrungen auf Anfrage).

Zubehöre:

Luftverteilerkasten aus verzinktem Stahl:

- Mit oder ohne Isolierung.
- Mit oder ohne Strömungsgleichrichter.

Characteristics: perforated face square diffusers predisposed for filter insertion, for false ceiling, 595x595 mm overall size.

Finishing: frame in aluminium, perforated sheet steel painted white RAL 9016 matt.


Utilization: for ceiling installation for air return. Installation height: 2,5-4,0 m.

Fixing: clips (through holes on request).

Accessories:

Galvanized steel plenum:


- With or without insulation.
- With or without equalizer sheet.

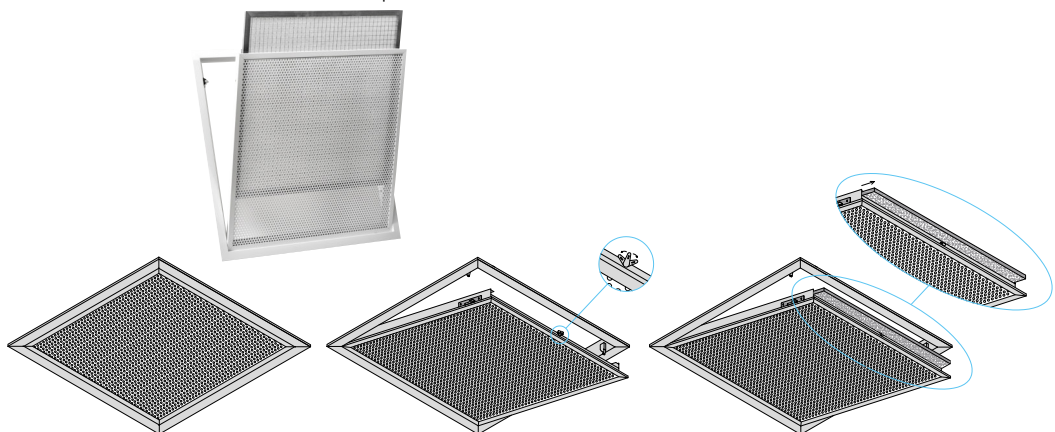


MODELLE | MODELS

BQSMF	Abnehmbarer gelochter Luftdurchlass mit Filter Perforated face diffuser with removable core and with filter
BQFSM	Abnehmbarer gelochter Luftdurchlass ohne Filter Perforated face diffuser with removable core without filter

ZEICHNUNGEN | DRAWINGS

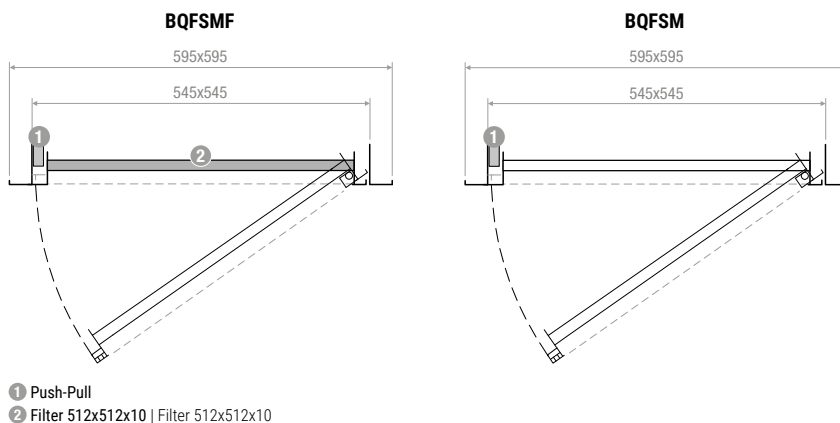

LUFTVERTEILERKASTEN | PLENUM

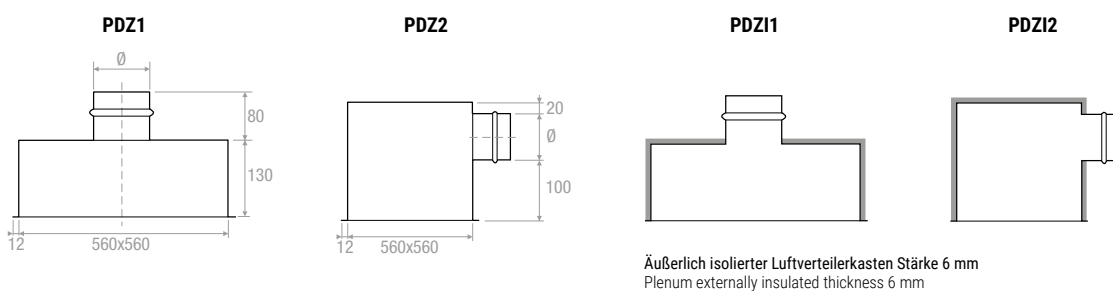

AUSWAHLTABELLE | TECHNICAL DATA

Modell Model	Ø mm	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dpt [Pa]	
			min	max	min	max	min	max
BQFSM	248	0,1239	550	1220	-	27	10	50
BQFSMF	248	0,1239	450	1130	-	35	20	70

PREISE | PRICES

stock

								
	BQF60SMF Mit Filter With filter	BQF60SM	Filter Filter	SC	PDZ1	PDZI1	PDZ2	PDZI2
	€	€	€	€	€	€	€	€
595x595 extern Rahmen overall size								