

## BQFC60

**Eigenschaften:** Quadratische gelochte Luftdurchlässe mit Rahmen.

**Konstruktion:** Aluminiumrahmen, Lochblech aus matt, weiß RAL 9016 lackiertem Stahl.

**Verwendung:** an der Decke, in Zuluft und Abluft. Einbauhöhe: 2,5-4,0 m.

**Befestigung:** Clips (mit Schraubenlöchern auf Anfrage).

**Zubehöre:**

- Luftverteilerkasten aus verzinktem Stahl:
  - Mit oder ohne Isolierung.
  - Mit oder ohne Strömungsgleichrichter.
- Mengeregulierung aus verzinktem Stahl mit Lamellen mit gegenläufigem Betrieb.

**Characteristics:** perforated panel diffusers with frame.

**Finishing:** frame in aluminium, perforated sheet steel painted white RAL 9016 matt.

**Utilization:** for ceiling installation and for air intake and delivery. Installation height: 2,5-4,0 m.

**Fixing:** clips (through hole on request).

**Accessories:**

- Galvanized steel plenum:
  - With or without insulation.
  - With or without equalizer sheet.
- Calibration damper made of galvanized steel and opposed blades.

---

**MODELLE | MODELS**


**BQFC60R** Abluft / keine Leitbleche | Return / no deflectors

**BQFC60M** Zuluft / Leitbleche | Supply / deflectors


---



ZEICHNUNGEN | DRAWINGS

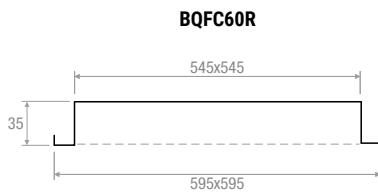

LUFTVERTEILERKASTEN | PLENUM

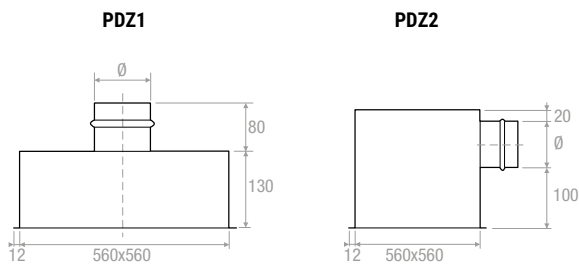


AUSWAHLTABELLE | TECHNICAL DATA


Modell   Model	A <sub>x</sub> [m <sup>2</sup> ]	Q [m <sup>3</sup> /h]		L <sub>WA</sub> [dB(A)]		X <sub>(0,25)</sub> -Y <sub>(0,25)</sub> [m]		Dp <sub>t</sub> [Pa]	
		min	max	min	max	min	max	min	max
<b>BQFC60R</b>	0,1398	540	1200	< 20	31	-	-	10	50

# BQFC60

## ZEICHNUNGEN | DRAWINGS

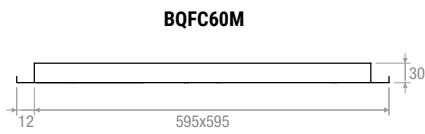

## KONFIGURATIONEN LUFTSTRÖME | AIR FLOW DIRECTIONS

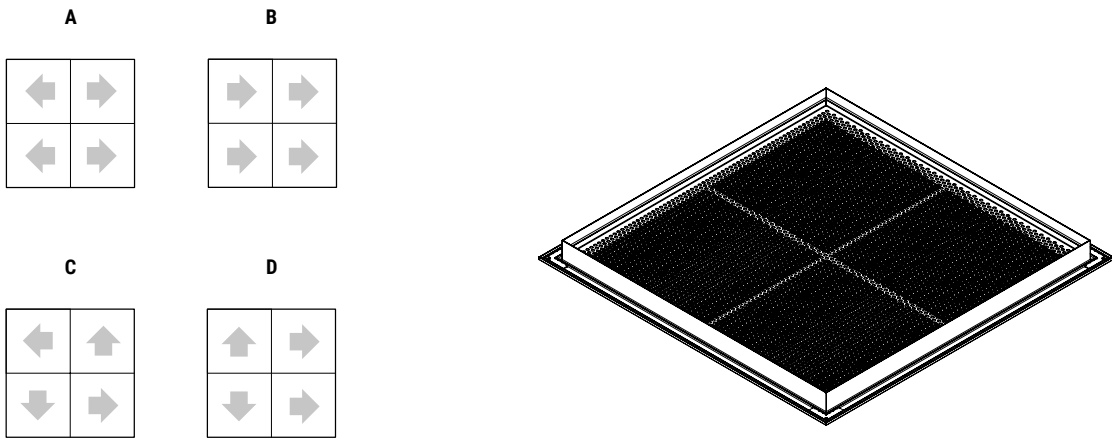


## AUSWAHLTABELLE | SELECTION TABLE


Modell   Model	Q [m³/h]		L <sub>WA</sub> [dB(A)]		X <sub>(0,20)</sub> [m]		Dp <sub>t</sub> [Pa]	
	min	max	min	max	min	max	min	max
<b>BQFC60M 160</b>	180	410	-	48	1,1	3,4	10	50
<b>BQFC60M 200</b>	240	540	-	46	1,6	5,1	10	50
<b>BQFC60M 250</b>	320	720	-	44	2,4	7,7	10	50
<b>BQFC60M 315</b>	430	970	-	43	3,7	11,8	10	50

PREISE | PRICES

ABLUF | RETURN

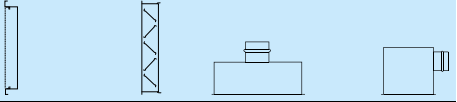						
BxH	Ø	D	BQFC60R	SC	PDZ1	PDZ2
mm	mm	mm	€	€	€	€
595x595 extern Rahmen   overall size			248	595		

ZULUF | SUPPLY

								
	Ø	D	BQFC60M	SC	PDZ1	PDZ11	PDZ2	PDZ12
	mm	mm	€	€	€	€	€	€
<b>BQFC60M 160</b>	158	595						
<b>BQFC60M 200</b>	198	595						
<b>BQFC60M 250</b>	248	595						
<b>BQFC60M 315</b>	313	595						