


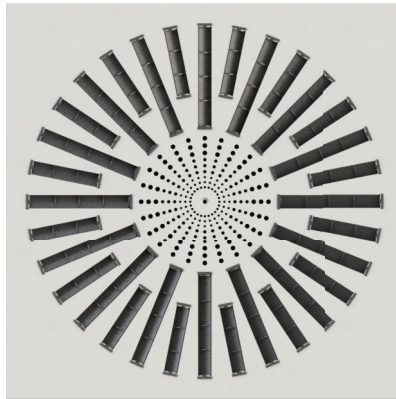

BQM1

Eigenschaften: Luftdurchlässe mit gemischtem Drallauslass und einstellbaren Luftstrahlen.

Konstruktion: matt, weiß RAL 9016 lackierter Stahl, Leitbleche aus schwarzem Polypropylen RAL 9005.

Verwendung: An der Decke, in Zuluft und Abluft (ohne Leitbleche). Einbauhöhe: 2,5-4,1 m.

Befestigung: mit seitlichen Schrauben oder mit mittlerer Schraube auf Montagebrücke.

Zubehöre:

Luftverteilerkasten aus verzinktem Stahl:

- Mit oder ohne Isolierung.
- Mit oder ohne Strömungsgleichrichter.
- Mit oder ohne Drosselklappe.
- Mit oder ohne Befestigungsbrücke.

Characteristics: swirl mixed diffusers with adjustable throws.

Finishing: RAL 9016 white matt painted steel, deflection blades are made of polypropylene RAL 9005 black.

Utilization: For ceiling installation. For return air (without deflectors) or supply air. Installation height: 2,5-4,1 m.


Fixing: by using lateral screws or central screw on mounting bridge.

Accessories:


Galvanized steel plenum:

- With or without insulation.
- With or without air equalizer.
- With or without damper.
- With or without mounting bridge.

ZEICHNUNGEN | DRAWINGS

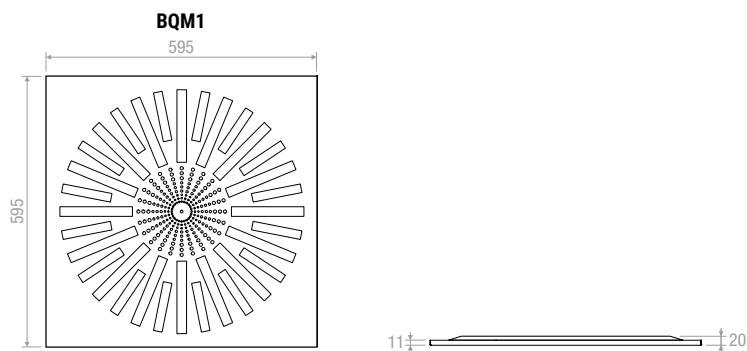


LUFTVERTEILERKASTEN | PLENUM

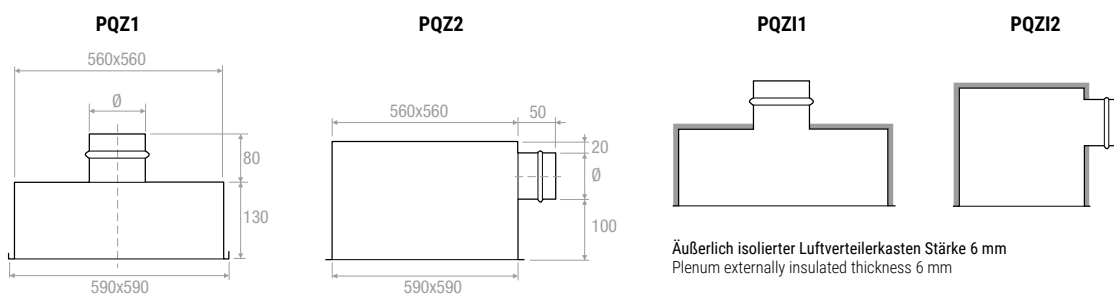

AUSWAHLTABELLE | TECHNICAL DATA

Modell Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQM1	0,0643	490	1060	24	41	2,1	4,5	10	50

PREISE | PRICES

	
	€
BQM1	101,57

PLENUM

AxB	Anschluss Spigot	 PQZ1	 PQZ11	 PQZ2	 PQZ12	Klappe Damper	Strömungs- gleichrichter Equalizer	Befestigungsbrücke Mounting bridge
mm	Ø mm	€	€	€	€	€	€	€
595x595	248							