



CFCRC

Eigenschaften: Runde Luftdurchlässe mit festen Kegeln mit abnehmbarem Mittelkörper und Drosselklappe.

Konstruktion: matt weiß RAL 9016 lackiertes Aluminium und Dichtung.

Verwendung: an der Decke, in Zuluft oder Abluft. Einbauhöhe: 2,6-4,1 m

Befestigung: mit verdeckten Schrauben am Hals des Luftdurchlasses oder mit Montagebrücke.

Zubehöre:

- Befestigungsring (CF).
- Platte 595x595 (CFP).

Characteristics: circular diffusers with fixed cones and removable core and butterfly damper.

Finishing: aluminium painted in matt white RAL 9016, with sealing gasket.


Utilization: for ceiling installation, for return or supply air application. Installation height: 2,6-4,1 m.

Fixing: by concealed fixing screws mounted on the diffuser neck or with mounting bridge.

Accessories:

- Fixing ring (CF).
- Panel 595x595 (CFP).

ZEICHNUNGEN | DRAWINGS

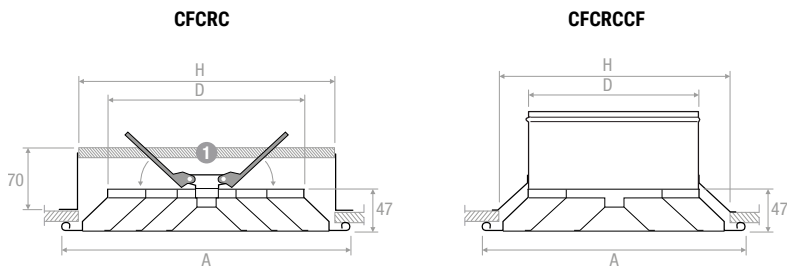

1 Befestigungsbrücke | Mounting bridge

Abmessungen Dimension	H	D	A
mm	mm	mm	mm
150	220	148	257
200	276	198	309
250	324	249	362
300	377	298	415
350	411	348	460

ZUBEHÖRE | ACCESSORIES

Befestigungsring | Fixing ring

CF




Polycarbonat
Polycarbonate
Ø 150
Ø 200
Ø 250



Stahl
Steel
Ø 300
Ø 350

MONTAGE | MOUNTING

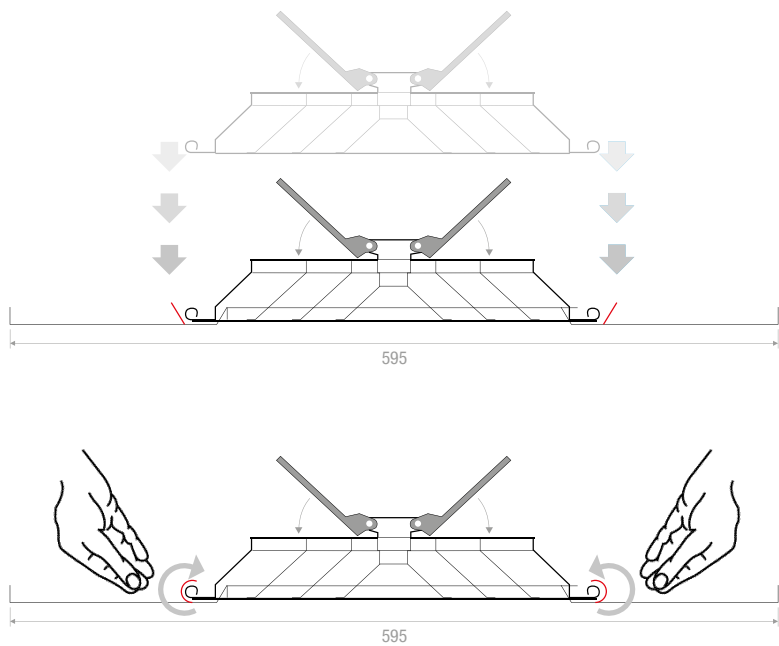

CFCRC+CFP VERSION AUF PLATTE | PANEL VERSION




AUSWAHLTABELLE | TECHNICAL DATA

Modell Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) - Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
CFCRC 150	0,0102	90	220	-	38	1,0	2,1	10	50
CFCRC 200	0,0227	200	490	-	38	1,5	3,2	10	50
CFCRC 250	0,0366	330	790	-	39	1,9	4,2	10	50
CFCRC 300	0,0519	470	1120	-	39	2,2	5,1	10	50
CFCRC 350	0,0684	620	1470	-	40	2,6	6,0	10	50

PREISE | PRICES

stock

							
Ø	CFCRC	Box	CF Befestigungsring Fixing ring		CFP	Box	
mm	€	Stück Pieces	€		€	Stück Pieces	
150		4				10	
200		4				10	
250		4				10	
300		4			-	-	
350		4			-	-	

Befestigungsbrücke im Preis inbegriffen | Mounting bridge is included in the price