




CKM



Eigenschaften: Die Inline-Kanalventilatoren CKM sind für den schnellen und sicheren Einbau in den Abschnitten rechteckiger Kanäle geplant und gebaut. Die Ventilatoren sind mit einem Laufrad aus verzinktem Stahl mit einfacher Ansaugung und direkt gekoppeltem und durch die geförderte Flüssigkeit gekühltem Elektromotor ausgestattet. Die Lüfterräder sind in einem Gehäuse aus verzinkten Stahl mit Flanschen zur Befestigung an den Kanälen untergebracht. Die Ventilatoreinheit ist an einer Drehtür montiert, die eine schnelle Wartung und vollständige Desinfektion des Ventilators gewährleistet.

Characteristics: in-line duct fans CKM are designed and built for rapid and secure installation in rectangular ducts. The fans are equipped with centrifugal impeller in galvanized steel directly coupled to an electric motor that is cooled by the air flow. The fans are housed in a box made of galvanized steel with flange for fixing to the ducts. The motorized impeller is mounted on a hinged door that ensures easy maintenance and complete sanitization of the fan.












ZEICHNUNGEN | DRAWINGS

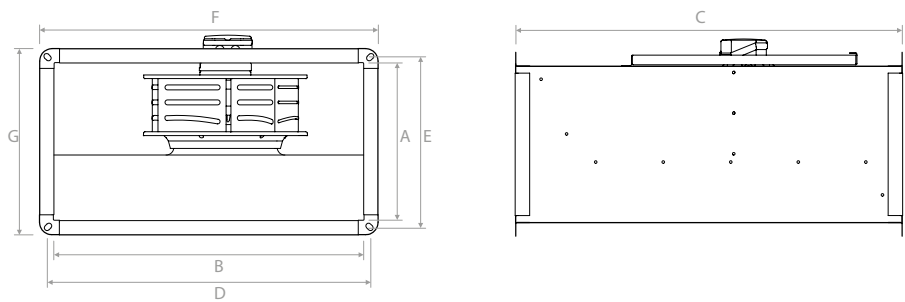

Modell Model	A	B	C	D	E	F	G
	mm	mm	mm	mm	mm	mm	mm
CKM 30-15	150	300	400	320	170	350	200
CKM 40-20 A	200	400	500	420	220	450	250
CKM 40-20 B	200	400	500	420	220	450	250
CKM 50-25	250	500	565	520	270	550	300
CKM 60-30	300	600	750	620	320	660	360
CKM 60-35 A	350	600	750	620	370	660	410
CKM 60-35 B	350	600	750	620	370	660	410
CKM 70-40 A	400	700	800	720	420	770	470
CKM 70-40 B	400	700	800	720	420	770	470
CKM 80-50	500	800	920	820	520	870	570
CKM 100-50	500	1000	1050	1030	530	1070	570

LEISTUNGSTABELLE | PERFORMANCE TABLE

VEN

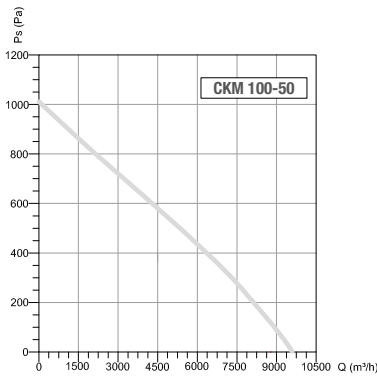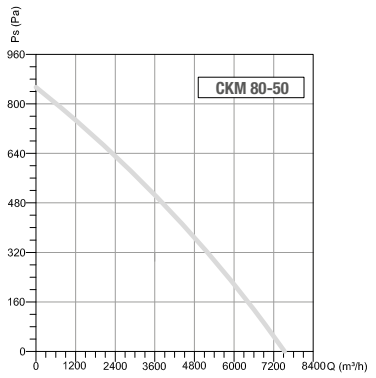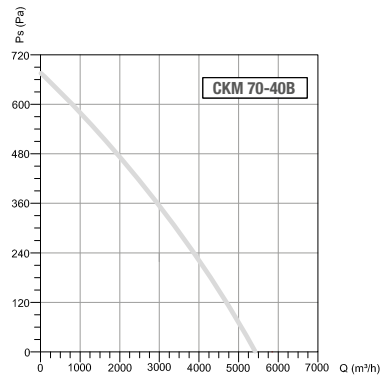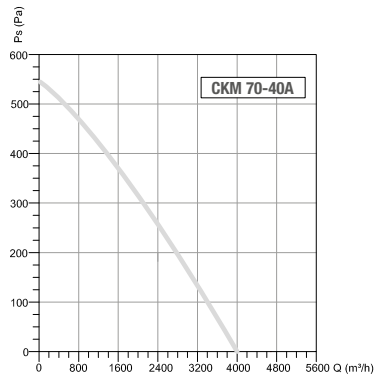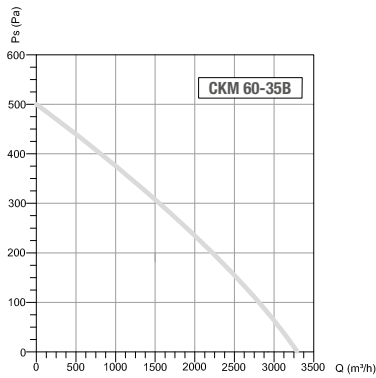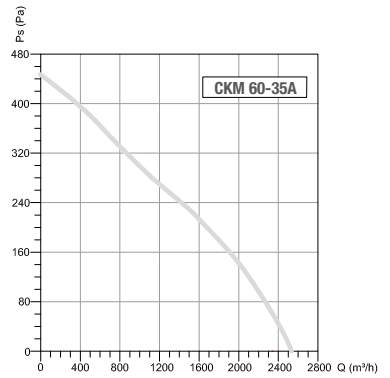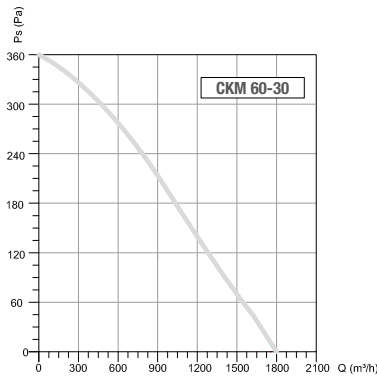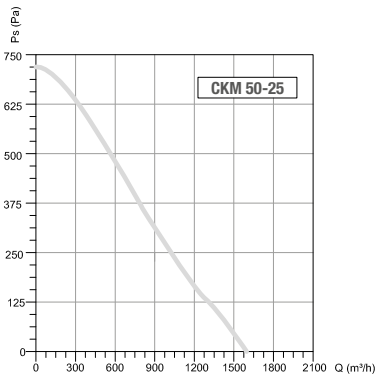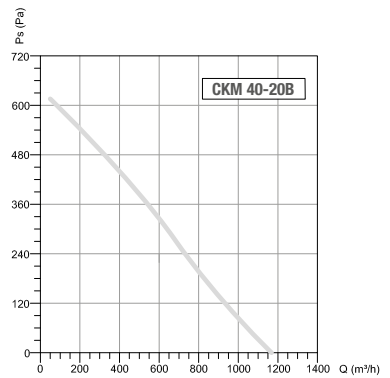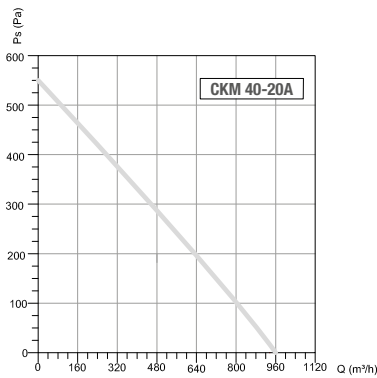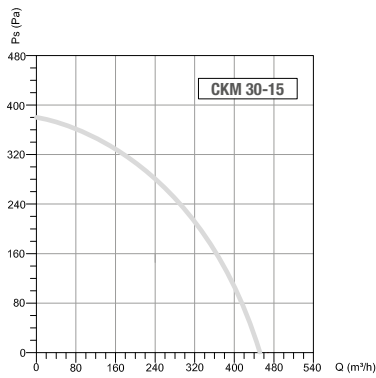

TECHNISCHE TABELLE ALLGEMEINE DATEN | GENERAL TECHNICAL DATA TABLE

Modell Model	Spannung Voltage	Frequenz Frequency	Leistung Power	Strom Current	Isolierstoff- klasse Insulation class	Schalllei- stung Sound power	Maximale Temperatur Maximum temperature	Geschwin- digkeit Speed	Regler Regulator	Gewicht Weight	
	Volt	Hz	W	A		dB(A)	°C	RPM		Kg	€
CKM 30-15	230	50	75	0,37	IP44	50	40	2450	RC2A	7	
CKM 40-20 A	230	50	130	0,55	IP44	55	40	2650	RC2A	10,5	
CKM 40-20 B	230	50	165	0,73	IP44	61	40	2650	RC2A	11	
CKM 50-25	230	50	240	1,1	IP44	65	40	2600	RC2A	15	
CKM 60-30	230	50	190	0,85	IP44	57	40	1440	RC2A	29	
CKM 60-35 A	230	50	180	0,9	IP44	60	40	1440	RC2A	31	
CKM 60-35 B	230	50	250	1,15	IP44	65	40	1400	RC2A	32	
CKM 70-40 A	230	50	380	1,7	IP44	63	40	1350	RC5A	44	
CKM 70-40 B	230	50	660	3	IP44	65	40	1350	RC5A	46	
CKM 80-50	400	50	1150	2,5	IP44	71	40	1400	-	84	
CKM 100-50	400	50	2000	3,8	IP44	72	40	1300	-	84	

ZUBEHÖRE | ACCESSORIES

Code Code	€
RC2A	
RC5A	

