


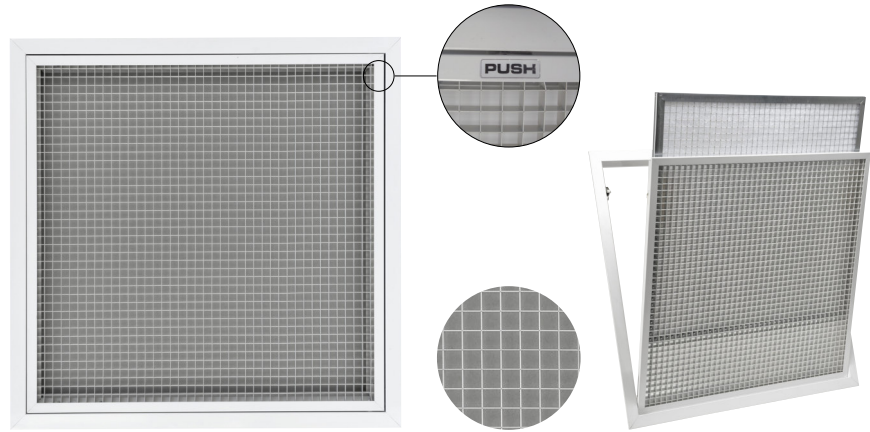

GMA60SMF

Eigenschaften: Gitter mit quadratischen Maschen 13x13 mm, abnehmbar für Zwischendecke Abm. 595x595 extern Rahmen.

Konstruktion: eloxiertes Aluminium.

Verwendung: Zwischendecke, in Abluft.

Befestigung: mit Clips oder auf Anfrage mit frontalen Schraubenbohrungen.

Zubehöre:

- Luftverteilerkasten aus verzinktem Stahl mit oder ohne Isolierung.
- Mengeregulierung aus verzinktem Stahl mit Lamellen mit gegenläufiger Bewegung.

Characteristics: egg crate grilles 13x13 mm pitch, with removable core for false ceilings 595x595 overall size.

Finishing: anodized aluminium.

Utilization: for false ceilings installation and for air intake.

Fixing: by using clips or holes for frontal screws on request.

Accessories:

- Galvanized steel plenum box with or without insulation.
- Calibration damper made of galvanized steel and fins with opposite movement.

MODELLE | MODELS


GMA60SMF Gitter mit quadratischen Maschen 13x13 mm, abnehmbar, Größe 595x595 mm inkl. Filter
Egg crate grille 13x13 mm pitch with removable core, 595x595 mm overall size, with filter

GMA60SM Gitter mit quadratischen Maschen 13x13 mm, abnehmbar, Größe 595x595 mm ohne Filter
Egg crate grille 13x13 mm pitch with removable core, 595x595 mm overall size, without filter


LACKIERUNG | PAINTING

Farben RAL 9016 matt, RAL 9010 glänzend: + 15% - Weitere RAL-Farben: Preise auf Anfrage
Color RAL 9016 matt, RAL 9010 glossy: + 15% - Different RAL colors: prices on request

ZEICHNUNGEN | DRAWINGS

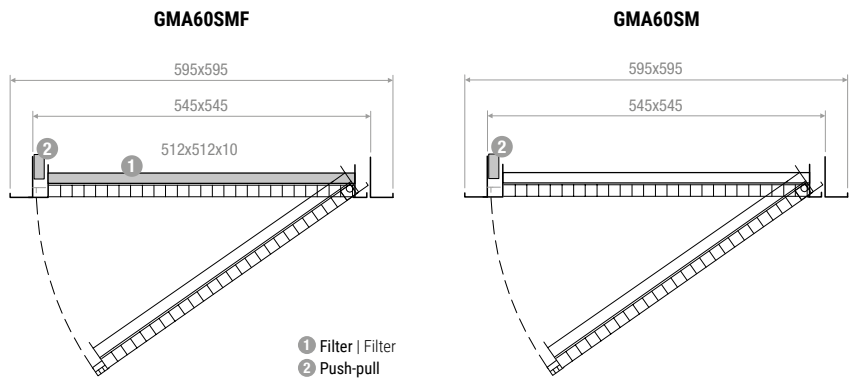


LUFTVERTEILERKASTEN | PLENUM

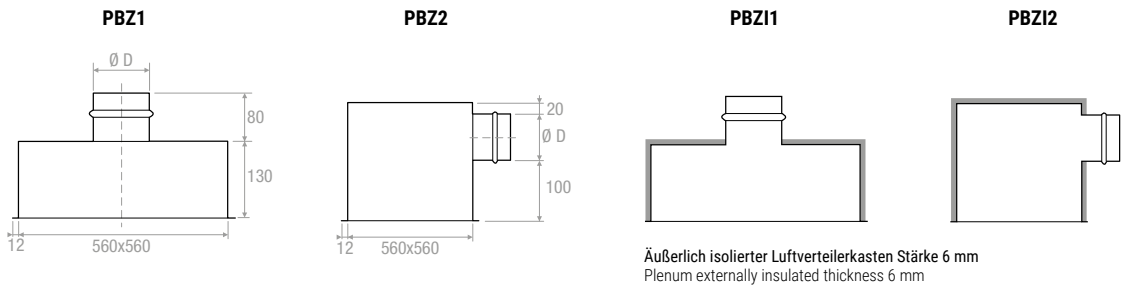

GMA60SMF

FILTERZUGANGSCHEMA | FILTER ACCESS SCHEME

GRI

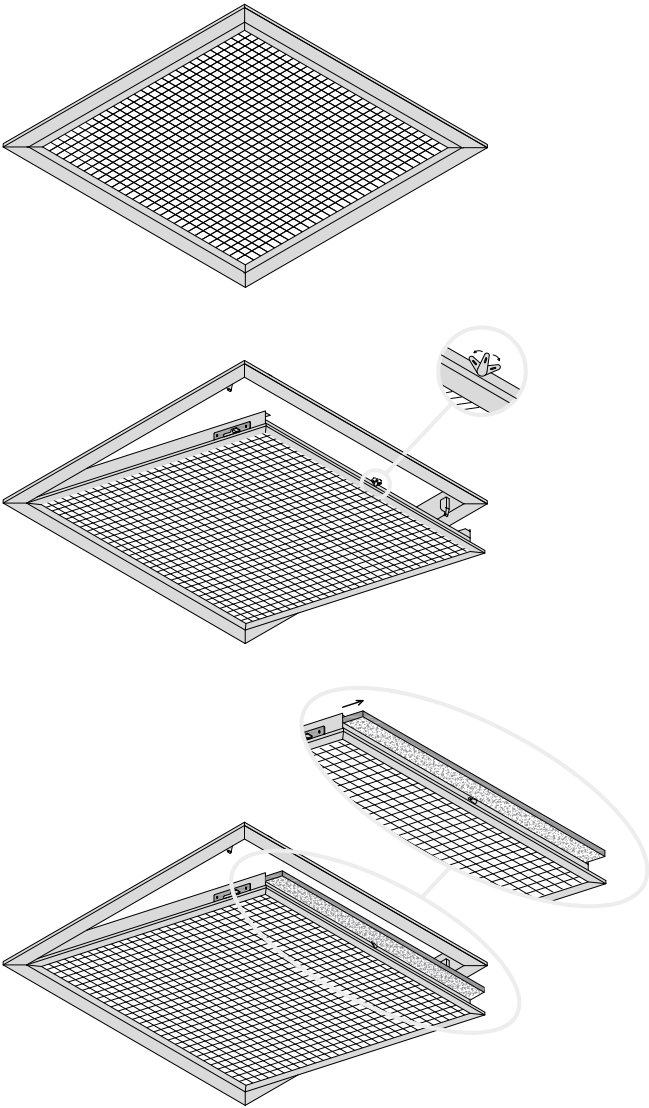

AUSWAHLTABELLE | SELECTION TABLE

Modell Modell	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
GMA60SM	0,2639	3140	6190	33	53	5	20
GMA60SMF	0,2639	1090	2910	-	31	10	50

PREISE | PRICES

stock

								
BxH	GMA60SMF mit Filter with filter	GMA60SM	Filter Filter Eff. G2	SC	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€	€
595x595								