




VCC



Eigenschaften: die Inline-Radialventilatoren der Serie VCC sind aus pulverbeschichtetem Eisenblech und verzinktem Laufrad aus verzinktem Stahl erstellt. Der Elektromotor mit Direktantrieb wird direkt von der geförderten Flüssigkeit gekühlt. Diese Produktreihe von Ventilatoren eignet sich für das Arbeiten in jeder Position mit dem großen Vorteil, dass die Luft auf derselben Achse wie das Laufrad transportiert werden kann. Beide Seiten des Ventilators sind für den Anschluss an die Leitungen mit Schnellkupplungen vorbereitet.

Characteristics: in-line centrifugal fans of the series VCC are made with housing in powder-coated sheet iron and galvanized steel impeller. The electric motor is directly coupled and cooled by the air flow. This range of fans is suitable for work in any position with the great advantage of being able to move the air on the same axis of the impeller. Both sides of the fan are designed to be connected to the ducts.

ZEICHNUNGEN | DRAWINGS











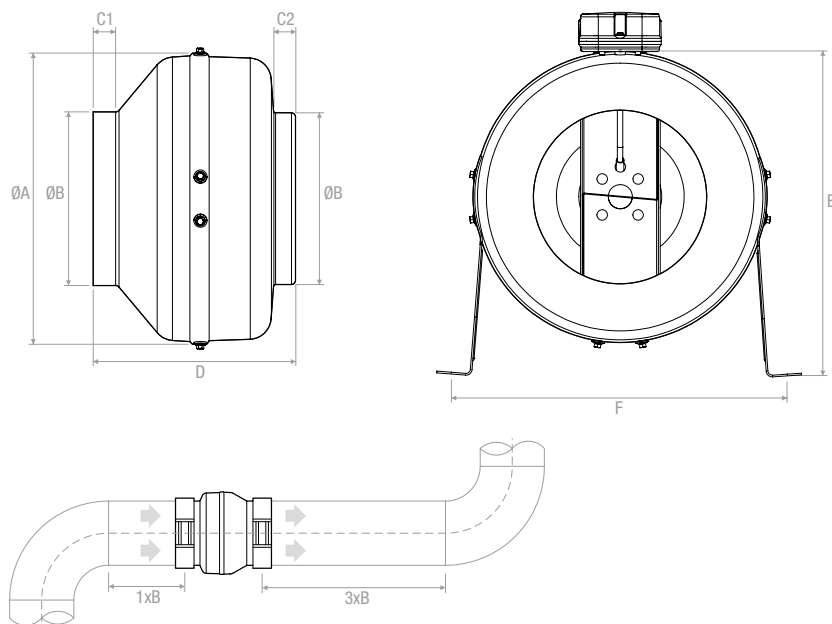


Modell Model	A	B	D	E	F	C1	C2
	mm	mm	mm	mm	mm	mm	mm
VCC 100	245	97	197	273	268	20	20
VCC 125	245	122	188	273	268	20	20
VCC 150	272	147	192	286	295	23	25
VCC 160	272	157	192	286	295	23	25
VCC 200 A	330	196	230	380	352	30	28
VCC 200 B	330	196	230	380	352	30	28
VCC 250 A	330	247	227	380	352	30	28
VCC 250 B	330	247	227	380	352	30	28
VCC 315 A	400	313	285	415	422	30	30
VCC 315 B	400	313	285	415	422	30	30
VCC 355	400	352	378	415	422	30	30



LEISTUNGSTABELLE | PERFORMANCE TABLE

VEN

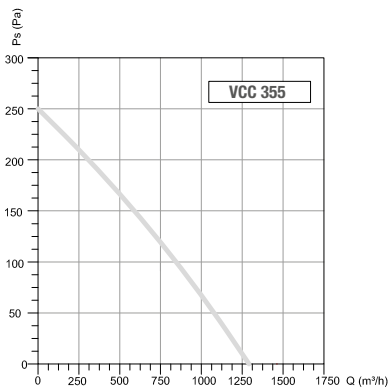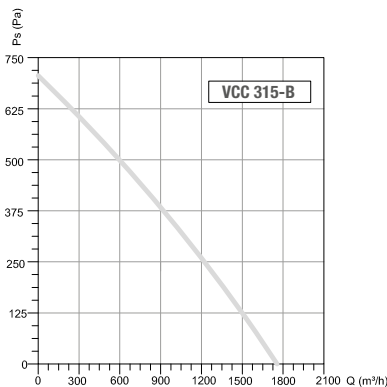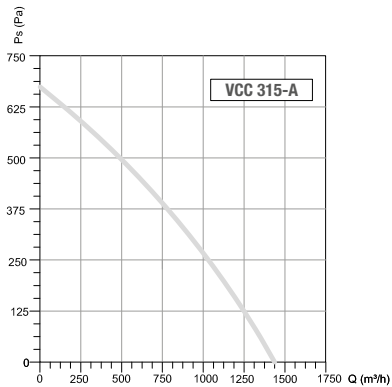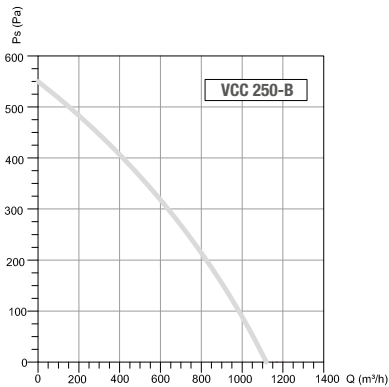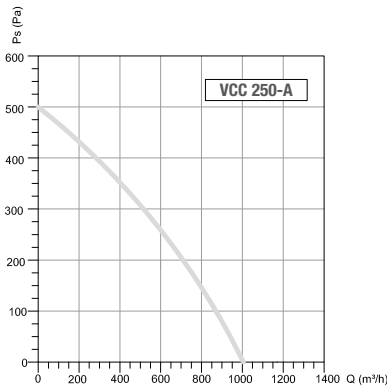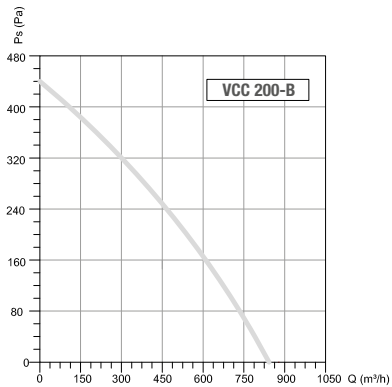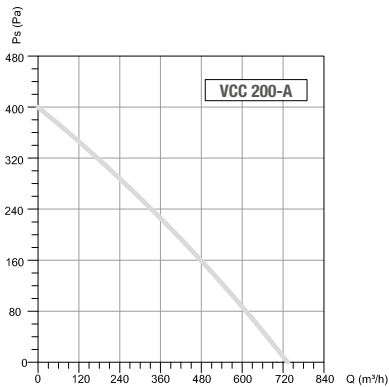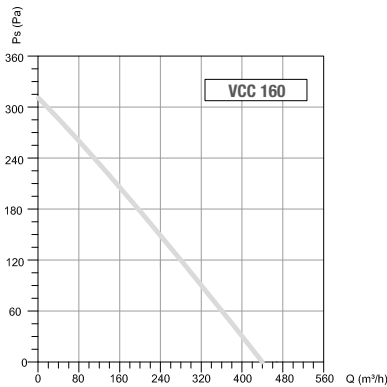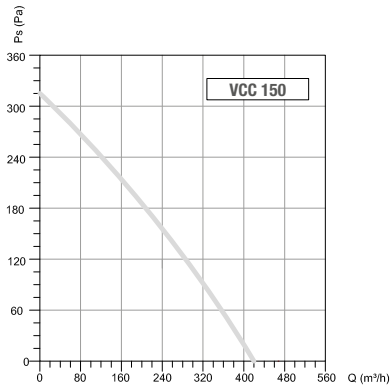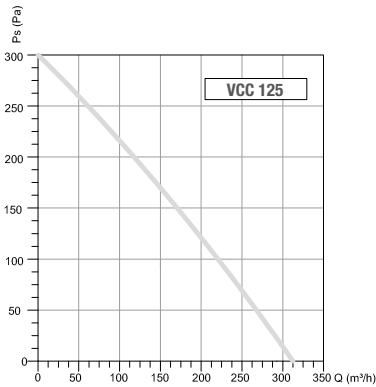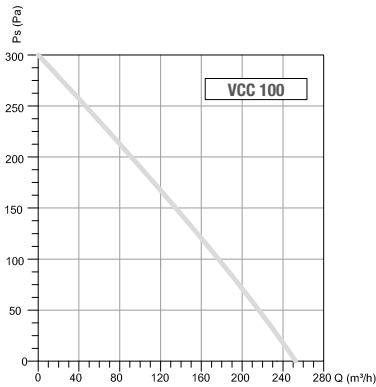

TECHNISCHE TABELLE ALLGEMEINE DATEN | GENERAL TECHNICAL DATA TABLE

Modell Model	Spannung Voltage	Frequenz Frequency	Leistung Power	Strom Current	Isolierstoff- klasse Insulation class	Schalllei- stung Sound power	Maximale Temperatur Maximum temperature	Geschwin- digkeit Speed	Regler Regulator	Gewicht Weight	
	Volt	Hz	W	A		dB(A)	°C	RPM		Kg	€
VCC100	230	50	60	0,3	IP44	51	40	2610	RC2A	2,6	
VCC125	230	50	80	0,4	IP44	50	40	2325	RC2A	2,7	
VCC150	230	50	78	0,4	IP44	53	40	2450	RC2A	3	
VCC160	230	50	85	0,4	IP44	52	40	2550	RC2A	3,2	
VCC200A	230	50	90	0,43	IP44	53	40	2300	RC2A	4,4	
VCC200B	230	50	100	0,51	IP44	54	40	2530	RC2A	4,8	
VCC250A	230	50	140	0,69	IP44	52	40	2400	RC2A	4,9	
VCC250B	230	50	145	0,74	IP44	54	40	2650	RC2A	5,3	
VCC315A	230	50	160	0,8	IP44	54	40	2400	RC2A	6,8	
VCC315B	230	50	180	0,87	IP44	56	40	2500	RC2A	6,9	
VCC355	230	50	135	1	IP44	52	40	1450	RC2A	9	

ZUBEHÖRE | ACCESSORIES

Code Code	€
RC2A	

