

BQFC60



MERKMALE:

Luftdurchlässe, Lochplatten mit Rahmen

AUSFÜHRUNG:

Aluminiumrahmen, Lochblech aus weiß lackiertem Stahl, RAL 9010.

EINSATZBEREICH:

An der Decke, Zuluft und Rückluft.
Einbauhöhe: 2,5-4,0 m

BEFESTIGUNG:

Clips (Schrauben auf Anfrage)

ZUBEHÖR:

- Anschlusskasten aus verzinktem Stahl, Standard oder isoliert, mit oder ohne Equalizer-Netz.
- Jalousieklappe aus verzinktem Stahl mit Flügeln mit gegensätzlichen Bewegungen.

CHARACTERISTICS:

Perforated face square diffusers with frame.

CONSTRUCTION:

Frame in aluminium, perforated sheet steel painted white RAL 9010.

UTILIZATION:

For ceiling installation and for air intake and delivery.
Installation height: 2,5-4,0 m

FIXING:

Clips (frontal screws on request).




ACCESSORIES:

- Galvanized steel plenum, standard or insulated, with or without equalizer sheet.
- Calibration damper made of galvanized steel and fins with opposite movement.

PREISE - PRICES

BxH	BQFC60R	SC	PDZ1	PDZ2
mm	€	€	€	€
595x595 inklusive Rahmen - overall size				

ZEICHNUNGEN - DRAWINGS

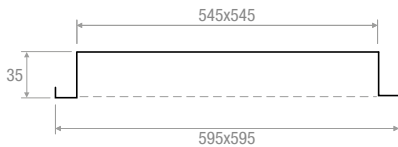


BQFC60R: Rückluft / keine Luftlenkelemente - Return / no deflectors

BQFC60MS: Zuluft / Luftlenkelemente / Anschluss oben - Supply / deflectors / top spigot

BQFC60ML: Zuluft / Luftlenkelemente / Anschluss seitlich - Supply / deflectors / side spigot

SCNELLAUSLEGUNG - QUICK SELECTION DIAGRAM

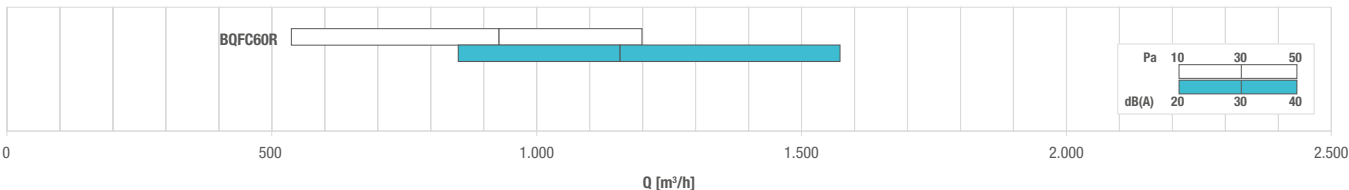

AUSWAHLTABELLE RÜCKLUFT - SELECTION TABLE RETURN

Modell - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQFC60R	0,1398	540	1200	< 20	31	-	-	10	50


PREISE - PRICES

ZULUFT - SUPPLY


	BQFC60M	Ø B	SC	PDZ1	PDZ11
	€	mm	€	€	€
BQFC60MS 160		158			
BQFC60MS 200		198			
BQFC60MS 250		248			
BQFC60MS 315		313			
	BQFC60M	Ø B	SC	PDZ2	PDZ12
BQFC60ML 160		158			
BQFC60ML 200		198			
BQFC60ML 250		248			
BQFC60ML 315		313			

ZEICHNUNGEN - DRAWINGS


Projektion Luftströme
Air flow configuration




BQFC60M



BQFC60MS


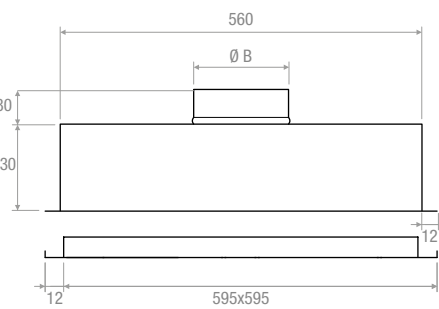


BQFC60ML

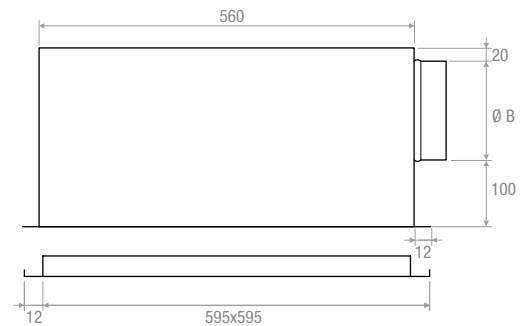

SCHNELLAUSLEGUNG - QUICK SELECTION DIAGRAM

ZULUFT - SUPPLY

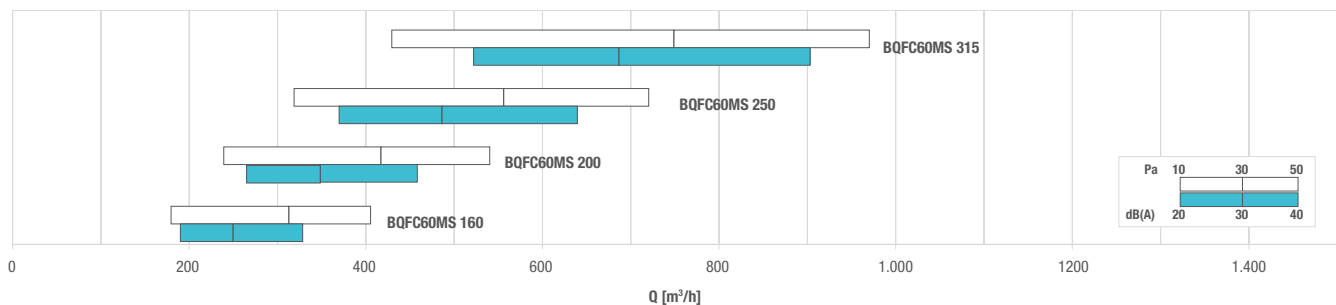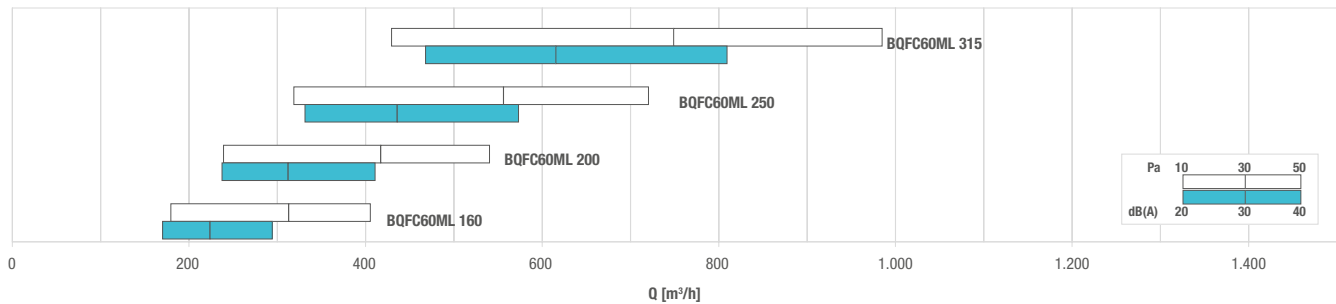

AUSWAHLTABELLE - SELECTION TABLE

Modell - Model	Q [m³/h]		L _{wa} [dB(A)]		X _{0,20} [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
BQFC60MS 160	180	410	-	48	1,1	3,4	10	50
BQFC60MS 200	240	540	-	46	1,6	5,1	10	50
BQFC60MS 250	320	720	-	44	2,4	7,7	10	50
BQFC60MS 315	430	970	-	43	3,7	11,8	10	50

Modell - Model	Q [m³/h]		L _{wa} [dB(A)]		X _{0,20} [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
BQFC60ML 160	180	410	--	52	1,1	3,4	10	50
BQFC60ML 200	240	540	--	50	1,6	5,1	10	50
BQFC60ML 250	320	720	--	48	2,4	7,7	10	50
BQFC60ML 315	430	970	--	47	3,7	11,8	10	50

