

BQFSMF



MERKMALE:

Gelochtes Abluftgitter mit vollständig abnehmbarem Rahmen für Gehäuse und Filterwechsel.

AUSFÜHRUNG:

Rahmen aus lackiertem Aluminium RAL 9010 Abdeckung aus lackiertem Stahlblech RAL 9010

EINSATZBEREICH:

An der Wand/Decke, für Rückluft.

BEFESTIGUNG:

Mit Clips (Schrauben auf Anfrage)

SCHLIESSUNG:

Push/Pull

CHARACTERISTICS:

Perforated face grille. Removable core for filter insertion and removal.

CONSTRUCTION:

Frame made of RAL 9010 white painted aluminium. Panel made of RAL 9010 white painted steel.

UTILIZATION:

For wall/ceiling installation and for air intake.

FIXING:

By clips (frontal screws on request).

CLOSING:

By push/pull system.


PREISE - PRICES

	Abmessung - Dimension B mm						
	200	300	400	500	600	800	1000
H mm	€	€	€	€	€	€	€
200							
300							
400							
500							
600							


Hinweis: Filter im Preis inkludiert - Note: Prices with filter included

ZEICHNUNGEN - DRAWINGS

Schließen mit push-pull
Closing with push-pull

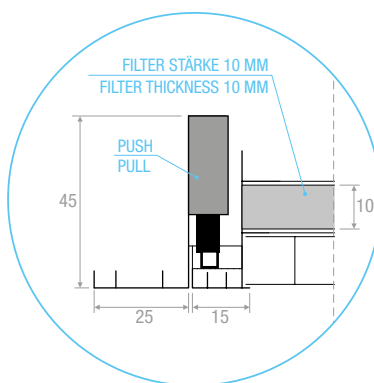

BQFSMF

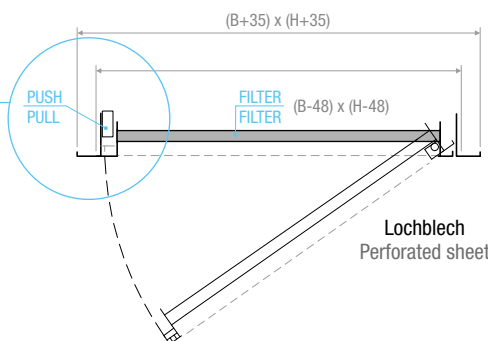

ABMESSUNGEN FILTER - FILTER DIMENSIONS

	Abmessungen - Dimension B mm						
	200	300	400	500	600	800	1000
H mm							
200	152x152	252x152	352x152	452x152	552x152	752x152	952x152
300	152x252	252x252	352x252	452x252	552x252	752x252	952x252
400	152x352	252x352	352x352	452x352	552x352	752x352	952x352
500	152x452	252x452	352x452	452x452	552x452	752x452	952x452
600	152x552	252x552	352x552	452x552	552x552	752x552	952x552

AUSWAHLTABELLE - SELECTION TABLE

Modell - Model	A _k [m²]	Q [m³/h]		L _{wa} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
200x200	0,014	50	130	-	24	20	70
300x200	0,021	70	190	-	25	20	70
400x200	0,028	100	250	-	27	20	70
500x200	0,035	130	320	-	28	20	70
600x200	0,042	150	380	-	29	20	70
800x200	0,056	200	500	-	31	20	70
200x300	0,021	80	190	-	25	20	70
300x300	0,0315	110	280	-	28	20	70
400x300	0,042	150	380	-	29	20	70
500x300	0,0525	190	470	-	30	20	70
600x300	0,063	230	560	-	31	20	70
800x300	0,084	300	760	-	33	20	70
200x400	0,028	100	250	-	27	20	70
300x400	0,042	150	380	-	29	20	70
400x400	0,056	200	500	-	30	20	70
500x400	0,07	250	630	-	32	20	70
600x400	0,084	300	760	-	33	20	70
800x400	0,112	400	1010	-	34	20	70
200x500	0,035	130	320	-	28	20	70
300x500	0,0525	190	470	-	30	20	70
400x500	0,07	250	630	-	32	20	70
500x500	0,0875	310	790	-	33	20	70
600x500	0,105	380	950	-	34	20	70
800x500	0,14	500	1260	-	35	20	70
200x600	0,042	150	380	-	29	20	70
300x600	0,063	230	570	-	31	20	70
400x600	0,084	300	760	-	33	20	70
500x600	0,105	380	950	-	34	20	70
600x600	0,126	450	1130	-	35	20	70
800x600	0,168	600	1510	-	36	20	70
200x800	0,056	200	500	-	33	20	70
300x800	0,084	300	760	-	34	20	70
400x800	0,112	400	1010	-	35	20	70
500x800	0,14	500	1260	-	36	20	70
600x800	0,168	600	1510	-	38	20	70
800x800	0,224	810	2020	-	40	20	70

