


PREISE - PRICES

HÖHE HEIGHT	BASE mm							
	100	200	300	400	500	600	700	800
mm	€	€	€	€	€	€	€	€
200								
300								
400								
500								
600								

LEISTUNGSDATEN - PERFORMANCE TABLE

Abmessungen - Sizes	Druck - Pressure	Integrität - Integrity	Wärmedämmung Thermal insulation
100 x 100 mm	-	E 120	I 120
400 x 400 mm	-	E 120	I 120
800 x 600 mm	-	E 60	I 60
100 x 100 mm	+	E 90	I 60
400 x 400 mm	+	E 120	I 60
800 x 600 mm	+	E 120	I 90

ABMESSUNGEN - DIMENSION

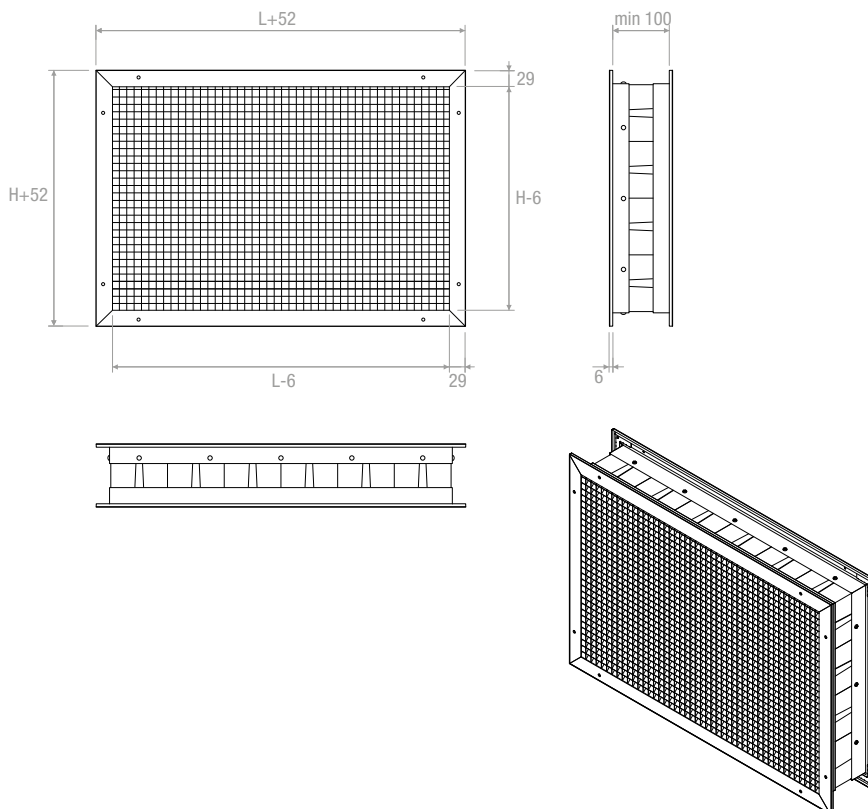

MERKMALE:

Brandgitter für die Inneninstallation geeignet. Zertifiziert nach EN 1364-5:2017 und EN 1363-1:2012. Gitter mit großer Luftaustrittsfläche.

AUSFÜHRUNG:

Ausführung mit doppeltem externen quadratischen Gitterrost aus Aluminium mit Rahmen und intumeszierenden und thermoexpandierendem Innenelement.

MINDEINSTALLATION FÜR HELTERUNG:

Mauerwerk aus Porenbeton, Dicke 100 mm und Dichte 550 kg/mc.

CHARACTERISTICS:

Fire grille suitable for indoor installation. Certified according to EN 1364-5:2017 and EN 1363-1:2012. Large free area for air passage.

CONSTRUCTION:

Execution with double egg crate external grille in aluminum with frame and internal element intumescent and thermo-expanding.

MINIMUM INSTALLATION SUPPORT:

Low density rigid wall made of aerated concrete of 100 mm thick and density of 550 kg/mc.

