


PREISE - PRICES

					
Modell Model	DIC2	PQZ2	PQZI2	Klappe Damper	Equalizer Equalizer
	€	€	€	€	€
DIC2 125					
DIC2 160					
DIC2 200					
DIC2 250					


ZEICHNUNGEN - DRAWINGS

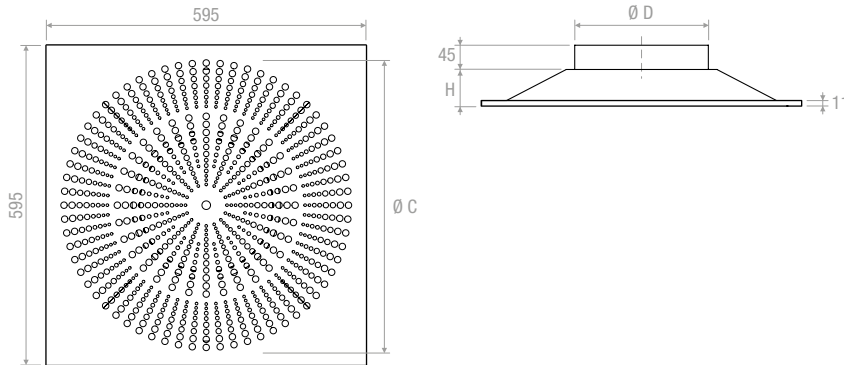

ABMESSUNGEN - SIZES

Typ - Type	C (mm)	D (mm)	H (mm)
125	314	123	45
160	384	157	55
200	462	197	68
250	540	247	68


ZEICHNUNGEN - DRAWINGS

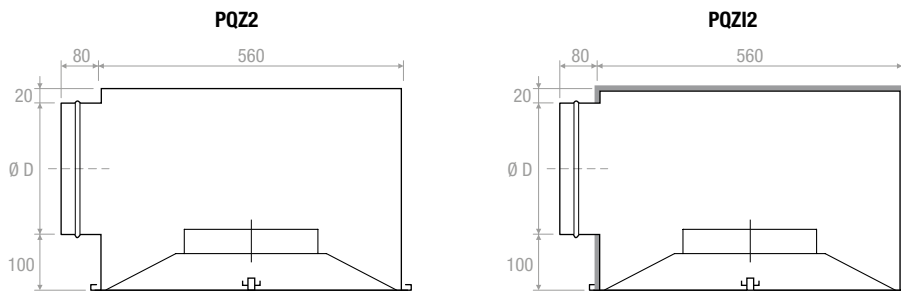

AUSWAHLTABELLE - SELECTION TABLE

Modell - Model	P [m³/h]		L _{WA} [dB(A)]		X _{0,20} [m]		Dp _i [Pa]	
	min	max	min	max	min	max	min	max
DIC2 125	55	90	25	40	0,2	0,4	20	40
DIC2 160	100	170	25	40	1,8	2,5	20	40
DIC2 200	210	270	25	40	2,1	3,3	20	40
DIC2 250	270	340	25	40	1,9	2,6	20	40

DIC2



MERKMALE:

Platten-Impuls-Luftdurchlässe mit hoher induktiver Kapazität.

AUSFÜHRUNG:

Weiß lackierter Stahl
RAL 9010.

EINSATZBEREICH:

An der Decke, Zuluft
Einbauhöhe: 2,7-4,1 m.

BEFESTIGUNG:

Befestigung seitlich oder in der Mitte mit Schraube/n auf Montagesteg.

ZUBEHÖR:

Anschlusskasten aus verzinktem Stahl, Standard oder isoliert, mit oder ohne Equalizer-Netz, Jalousieklappe und Montagesteg.

CHARACTERISTICS:

Panel diffuser pulse type with high inductive capacity.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation supply operation.
Installation height: 2,7-4,1 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or isolated, with or without equalizer sheet, calibration damper and mounting bridge.

