



BESCHREIBUNG:

Regler für den Luftdurchsatz mit konstantem Wert für rechteckige Kanäle. Automatische, mechanische Funktion, ohne zusätzlichen Energiebedarf, um den Volumenstrom in einem Differenzdruckbereich konstant zu halten.

MERKMALE:

Material: verzinkter Stahl
Endbearbeitung: verzinkt
Betriebstemperatur: -20° +70 °C.

EINSATZBEREICH:

In allen Lüftungsanlagen für die konstante Erhaltung des Luftstromes, unabhängig von den Druckunterschieden im Bereich der zulässigen Werte.

SPEZIALAUSFÜHRUNGEN:

Version RPVRZ mit Schallisolierung, Dicke 50 mm.

SPECIFICATIONS ITEM:

Air flow constant regulators for rectangular ducts. Automatic mechanical functioning, without auxiliary energy to maintain air flow constant within a differential pressure range.

CHARACTERISTICS:

Material: galvanised steel.
Finish: zinc coated.
Working temperature: -20° +70 °C.

USE:

For all ventilation systems to maintain air flow constant, independently of the pressure variations within the range of accepted values.

SPECIAL USES:

Version RPVRZ with acoustic insulation 50 mm thickness.





PREISE - PRICES

	X	LUFTDURCHSATZ - AIR FLOW		RPVR	RPVRZ
		MIN	max	€	€
BxH mm	mm				
200 x 100	62	250	700		
200 x 150	62	400	1000		
200 x 200	62	500	1300		
300 x 100	62	400	1000		
300 x 150	62	500	1500		
300 x 200	62	600	2000		
300 x 250	62	800	2500		
300 x 300	81	1000	3000		
400 x 200	81	900	2700		
400 x 250	87	1200	3400		
400 x 300	81	1500	4200		
400 x 400	*81	1800	5400		
500 x 200	81	1100	3400		
500 x 250	87	1500	4200		
500 x 300	120	1800	4800		
500 x 400	*81	2200	6800		
500 x 500	*87	3000	8400		
600 x 200	120	1500	4000		
600 x 250	120	1800	5000		
600 x 300	120	2100	6000		
600 x 400	*120	3000	8000		
600 x 500	*120	3600	10000		
600 x 600	*120	4200	12000		

* Für B ≥ 400 befindet sich im gleichen Gehäuse eine Doppeleinheit des Regulators.

* From B ≥ 400 are assembled from two equal units placed in one case - side to side.

RPVR

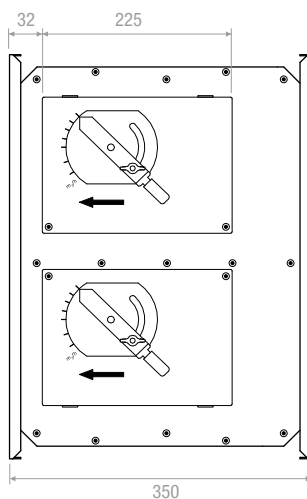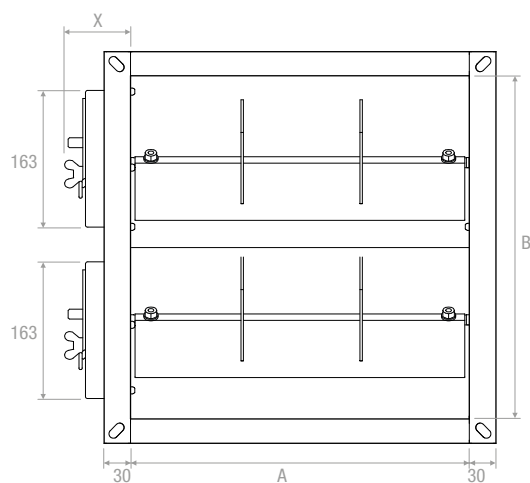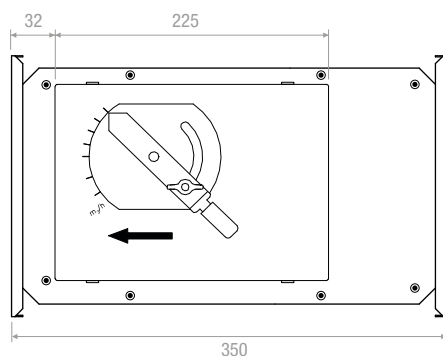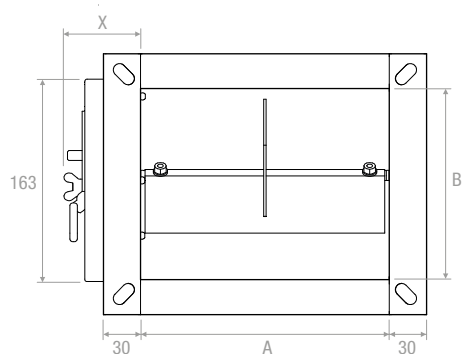

RPVRZ

