



BESCHREIBUNG:
Wand aus Aluminiumlaminat mit Verstärkung, bestehend aus einer Spirale aus harmonischem Stahldraht, die zwischen 2 mikrogelochten Schichten eingearbeitet ist, um den Schallpegel zu dämpfen. Isolierende Matratze in Polyesterfaser, Dicke 25 mm und Gewicht 250/300 g/m². Außenbeschichtung "Dampfsperre" aus verstärktem Aluminiumlaminat.

- EIGENSCHAFTEN:**
- Farbe Grau-Aluminium
 - Standardlänge 10 Meter
 - Biegeradius von 0,8 bis zum 1fachen Durchmesser
 - Arbeitstemperaturen -30/140 °C
 - Maximaler Betriebsdruck 3000 Pa
 - Maximale Luftgeschwindigkeit 30 m/s.

ANWENDUNGEN:
Klima- und Lüftungsanlagen, Ventilatoren.

DESCRIPTION:
Aluminium laminate wall with armature made of a harmonic steel wire spiral embedded between 2 layers micro-drilled for attenuation of the sound level. Insulation in polyester fiber th. 25 mm and weight 250/300 g/sm. "Vapor barrier" external coating in reinforced aluminium laminate.

- CHARACTERISTICS:**
- Gray-aluminium color
 - Standard length 10 meters
 - Bending radius from 0,8 to 1 times the diameter
 - Operating temperatures -30/140 °C
 - Maximum operating pressure 3000 pa
 - Maximum air speed 30 m/s.

APPLICATIONS:
Air conditioning and ventilation plants.

PREISE - PRICES

	€
82	
102	
127	
152	
160	
203	
254	
305	
315	
356	
406	
457	
508	

Hinweis: Preise per Meter
Notes: prices per meter

LAGERN

KLASSIFIZIERUNG DER BRANDREAKTION REACTION TO FIRE CLASSIFICATION

EN 13823: 2020
EN ISO 11925: 2020
EN 13501-1: 2019

C - s1, d0

DIAGRAMM SCHALLDÄMPFUNG ACOUSTIC ATTENUATION DIAGRAM

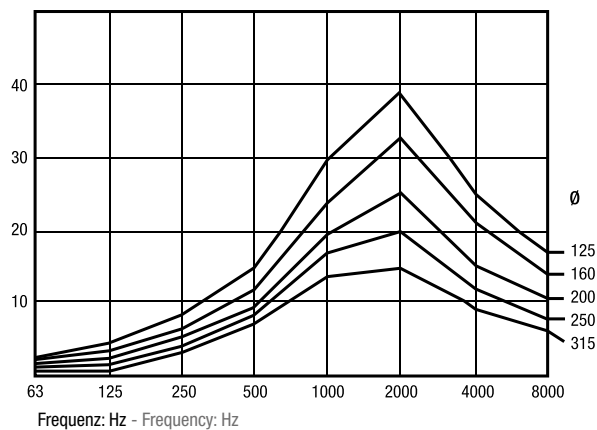


DIAGRAMM DRUCKVERLUST (Lufttemperatur 20 °C) PRESSURE DROP DIAGRAM (Air temperature 20 °C)

