



MERKMALE:

Luftdurchlässe mit orientierbarer Weitwurfdüse und einem Winkel von max. 30°.

AUSFÜHRUNG:

Mattiertes Aluminium mit transparenter Grundierung.

EINSATZBEREICH:

An der Decke oder an der Wand, für Zuluft. Einbauhöhe: 2,4-11,5 m.

BEFESTIGUNG:

Befestigung vorne auf dem Stutzen des Luftdurchlasses zum Kanal oder zum Anschlussstück runden Kanal.

ZUBEHÖR:

Anschlussstück für runden Kanal. CV: Schraubenabdeckung

CHARACTERISTICS:

Jet diffusers for long throw with orientable nozzle for a maximum angle of 30°.

CONSTRUCTION:

Naturelle satinized aluminium with transparent primer.

UTILIZATION:

For ceiling or wall installation and for air delivery. Installation height: 2,4-11,5 m.

FIXING:

Fixing by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.

ACCESSORIES:




Connector for circular duct. CV: cover screws.

PREISE - PRICES


LAGERND

	DU	CV	
mm	€	€	STÜCK - PIECES
DU 80			120
DU 150			28
DU 200			16


ZEICHNUNGEN - DRAWINGS

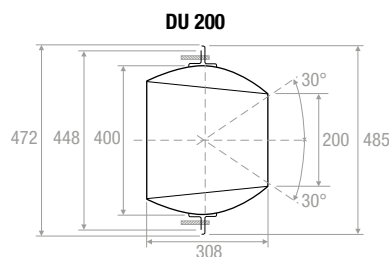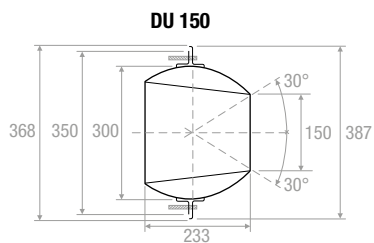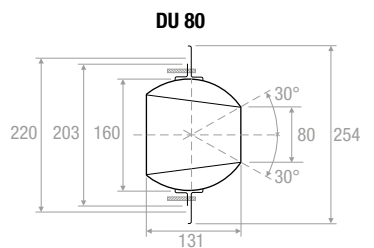


Montage am Kanal Mounting on the duct




Montage am runden Kanal Mounting on the circular duct



Montage mit Schlauch Mounting by flexible duct




Serienmontage Mounting in battery



ABMESSUNGEN - DIMENSIONS

Modell - Model	A	F	I
DU 80	200	207	300
DU 150	300	354	430
DU 200	350	452	430

SCHELLÜBERSICHT - QUICK SELECTION DIAGRAM

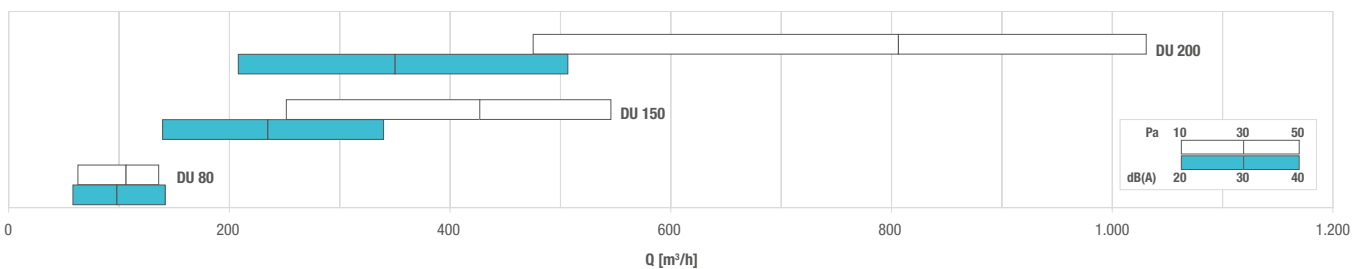

TECHNISCHE DATEN - TECHNICAL DATA

Modell - Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)} - Y_{(0,25)}$ [m]		Dp_i [Pa]	
		min	max	min	max	min	max	min	max
DU 80	0,0050	60	140	20	40	8,1	18,9	10	50
DU 150	0,0176	250	550	31	58	11,9	26,2	10	50
DU 200	0,0314	480	1030	38	69	14,0	30,1	10	50