



## CARATTERISTICHE:

In ventilatori centrifughi in linea della serie VCC sono realizzati con cassa in lamiera di ferro verniciata a polvere e girante in acciaio zincato. Il motore elettrico direttamente accoppiato è raffreddato direttamente dal fluido convogliato. Questa gamma di ventilatori è adatta per lavorare in qualsiasi posizione con il grande vantaggio di poter trasportare l'aria sullo stesso asse della girante. Entrambi i lati del ventilatore sono predisposti per la connessione ai condotti con agganci rapidi.

## CHARACTERISTICS:

In-line centrifugal fans of the series VCC are made with housing in powder-coated sheet iron and galvanized steel impeller. The electric motor is directly coupled and cooled by the air flow. This range of fans is suitable for work in any position with the great advantage of being able to move the air on the same axis of the impeller. Both sides of the fan are designed to connect the ducts with fastening clamps.

TABELLA TECNICA DATI GENERALI - PREZZI - GENERAL TECHNICAL DATA TABLE - PRICES

STOCK

| MODELLO<br>MODEL | TENSIONE - VOLTAGE | FREQUENZA<br>FREQUENCY | POTENZA - POWER | CLASSE ISOLAMENTO<br>INSULATION CLASS | CORRENTE - CURRENT | REGOLATORE<br>CONTROL | VELOCITÀ<br>SPEED |   |
|------------------|--------------------|------------------------|-----------------|---------------------------------------|--------------------|-----------------------|-------------------|---|
|                  | V                  | Hz                     | W               | class                                 | A                  |                       | RPM               | € |
| VCC 100          | 230                | 50                     | 80              | IP 55                                 | 0,3                | RC2A                  | 2610              |   |
| VCC 125          | 230                | 50                     | 80              | IP 55                                 | 0,36               | RC2A                  | 2325              |   |
| VCC 150 B        | 230                | 50                     | 85              | IP 55                                 | 0,38               | RC2A                  | 2425              |   |
| VCC 160 A        | 230                | 50                     | 90              | IP 55                                 | 0,4                | RC2A                  | 2385              |   |
| VCC 200 A        | 230                | 50                     | 95              | IP 55                                 | 0,43               | RC2A                  | 2280              |   |
| VCC 200 B        | 230                | 50                     | 122             | IP 55                                 | 0,56               | RC2A                  | 2550              |   |
| VCC 250 A        | 230                | 50                     | 124             | IP 55                                 | 0,56               | RC2A                  | 2500              |   |
| VCC 250 B        | 230                | 50                     | 145             | IP 55                                 | 0,63               | RC2A                  | 2635              |   |
| VCC 315 A        | 230                | 50                     | 190             | IP 55                                 | 0,9                | RC2A                  | 2560              |   |
| VCC 315 B        | 230                | 50                     | 210             | IP 55                                 | 1,1                | RC2A                  | 2660              |   |
| VCC 355          | 230                | 50                     | 123             | IP 55                                 | 0,63               | RC2A                  | 1420              |   |

| MODELLO<br>MODEL | €     |
|------------------|-------|
| RC2A             | 77,69 |



## DISEGNI - DRAWINGS


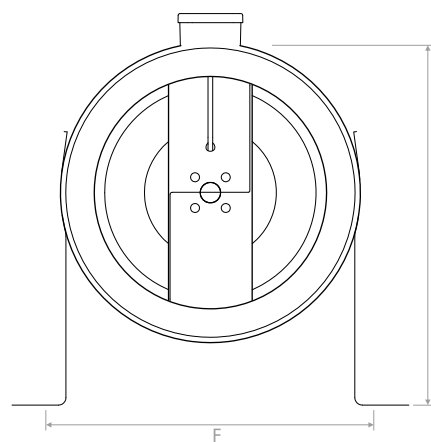


TABELLA DIMENSIONI - DIMENSIONAL TABLE

| Modello - Model | A   | B   | C1 | C2 | D   | E   | F   |
|-----------------|-----|-----|----|----|-----|-----|-----|
| VCC 100         | 245 | 97  | 22 | 22 | 197 | 273 | 268 |
| VCC 125         | 245 | 122 | 20 | 20 | 188 | 273 | 268 |
| VCC 150 B       | 272 | 147 | 23 | 25 | 192 | 286 | 295 |
| VCC 160 A       | 272 | 157 | 23 | 25 | 192 | 286 | 295 |
| VCC 200 A       | 330 | 196 | 30 | 28 | 230 | 380 | 352 |
| VCC 200 B       | 330 | 196 | 30 | 28 | 230 | 380 | 352 |
| VCC 250 A       | 330 | 247 | 30 | 28 | 227 | 380 | 352 |
| VCC 250 B       | 330 | 247 | 30 | 28 | 227 | 380 | 352 |
| VCC 315 A       | 400 | 313 | 30 | 30 | 285 | 415 | 422 |
| VCC 315 B       | 400 | 313 | 30 | 30 | 285 | 415 | 422 |
| VCC 355         | 400 | 352 | 30 | 30 | 378 | 415 | 422 |

## TABELLA PRESTAZIONI - PERFORMANCE TABLE

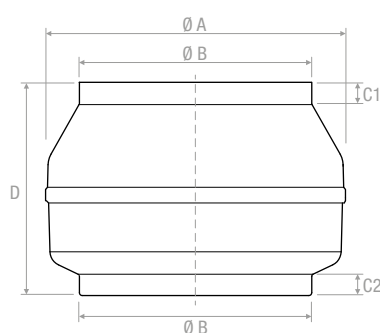