




DPI

- Caratteristiche:** diffusori multi direzionali a pannello con schermo forato ad alta induzione con deviatore di flusso.
- Costruzione:** acciaio verniciato bianco RAL 9016 opaco. Deflettori neri RAL 9005.
- Impiego:** a soffitto per immissione aria. Altezza di installazione: 2,8-3,4 m.
- Fissaggio:** con pannello su controsoffitto modulare.
- Accessori:** plenum con attacco laterale con o senza isolamento.
- Characteristics:** multidirectional high induction diffuser on panel with perforated plate high induction and flow diverter.
- Finishing:** RAL 9016 white matt painted steel. Deflectors black RAL 9005.
- Utilization:** ceiling installation for air supply. Installation height: 2,8-3,4 m.
- Fixing:** mounting with panel of modular ceiling.
- Accessories:** plenum box with side connection with or without insulation.

CONFIGURAZIONI FLUSSI ARIA | AIR FLOW DIRECTIONS

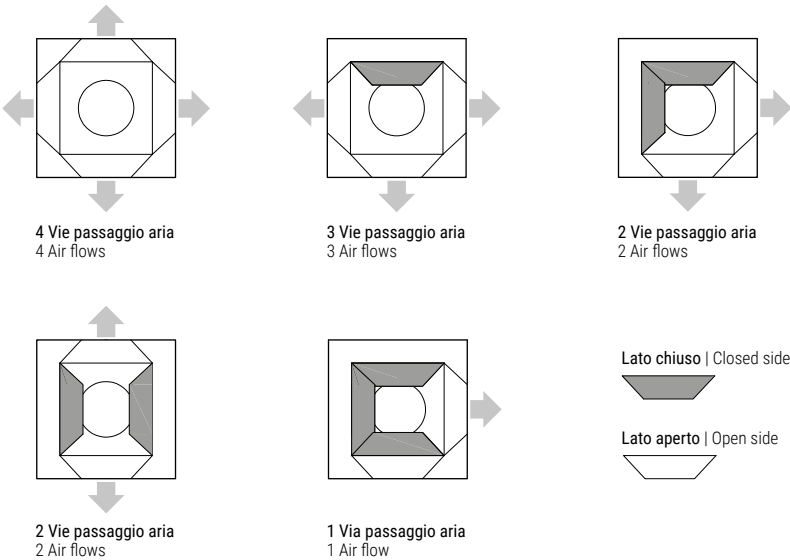

DISEGNI | DRAWINGS

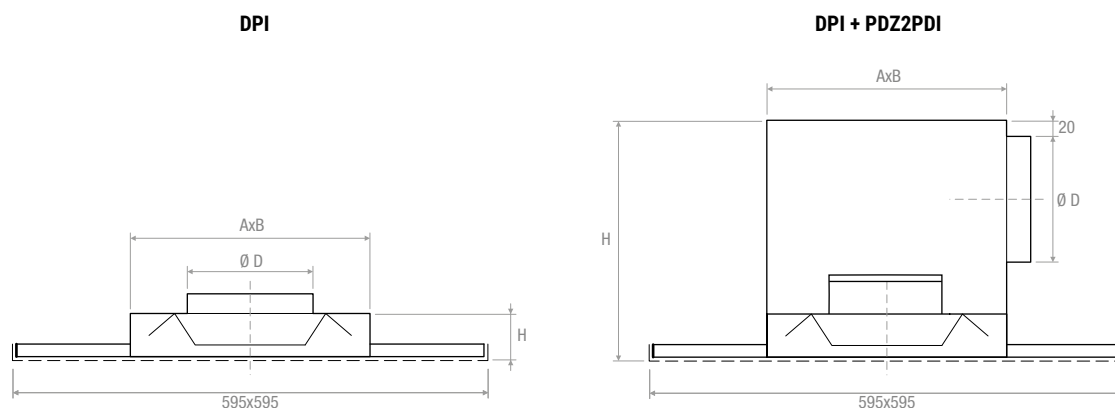


TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	Q [m³/h]		L _{WA} [dB(A)]		X _(0,50) [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
DPI 160	230	520	32	58	0,70	1,70	10	50
DPI 200	320	720	32	58	0,90	2,00	10	50
DPI 250	440	990	31	58	1,10	2,40	10	50
DPI 315	620	1380	31	57	1,30	2,90	10	50

VERSIONI DISPONIBILI | VERSIONS AVAILABLE

DPI	AxB	H	Ø D
	mm	mm	mm
160	306x306	55	158
200	381x381	60	198
250	476x476	70	248
315	592x592	90	313

Modello Model	AxB	H	Ø D
	mm	mm	mm
PDZ2DPI160	306x306	280	158
PDZ2DPI200	381x381	320	198
PDZ2DPI250	476x476	370	248
PDZ2DPI315	592x592	435	313
PDZI2DPI160	306x306	280	158
PDZI2DPI200	381x381	320	198
PDZI2DPI250	476x476	370	248
PDZI2DPI315	592x592	435	313