

PFA



Caratteristiche: plenum porta filtro assoluto con distribuzione a bassa turbolenza. Compresa serranda escluso diffusore.

Costruzione: plenum in lamiera di acciaio di forte spessore con verniciatura RAL 9005 senza piombo atta a garantire maggiore resistenza ai raggi ultravioletti. Filtro di facile estrazione altezza 68 mm standard con telaio in alluminio. Guarnizione poliuretanica di tenuta in unico pezzo. Dotato di serie di prese D.O.P. Classe tenuta D secondo UNI-EN 12237 ed EN 1507.

Impiego: a soffitto in ambienti a contaminazione controllata.

Varianti: costruzione in acciaio inox AISI 304-316.


Characteristics: filter plenum with distribution with low turbulence. Including damper without diffuser.

Finishing: thick steel plenum varnished RAL 9005 unleaded for ensuring greater resistance to ultraviolet rays. Filter easy to remove with standard height 68 mm aluminium frame. Polyurethane sealing gasket in one piece. Equipped as standard with pressure taps. Tightness class D according to UNI-EN 12237 and EN 1507.

Utilization: ceiling in controlled contamination environments.

Variant: stainless steel construction AISI 304-316.

DISEGNI | DRAWINGS

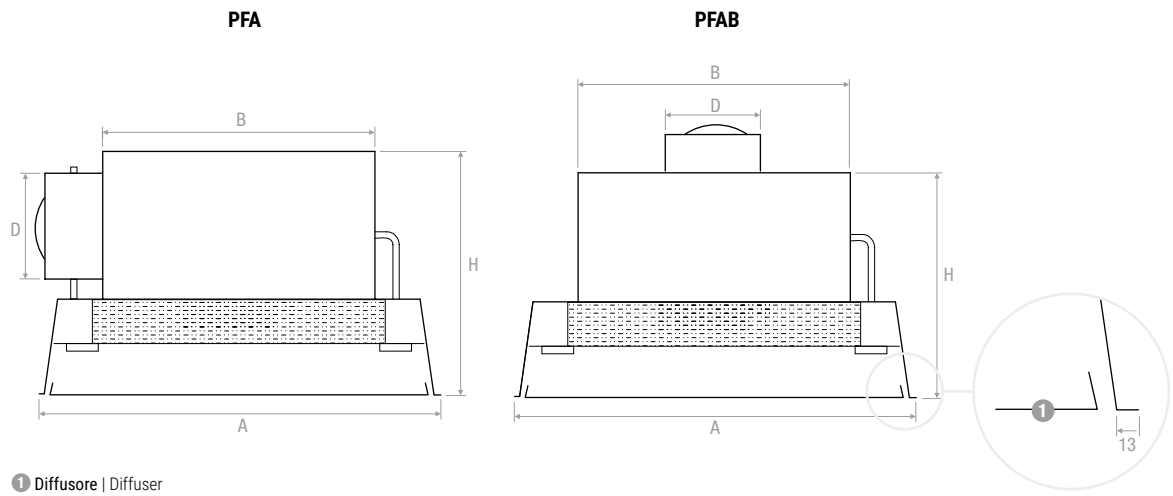

MONTAGGIO | MOUNTING



Cassettone terminale HEPA
HEPA plenum box



Filtro HEPA
HEPA filter

Diffusore
Air diffuser

BQEPFA



BQFPFA



AQ1PFA



VERSIONI DISPONIBILI | VERSIONS AVAILABLE

PFA

Modello Model	Plenum PFA				Filtro Filter		
	D	A	B	H	Dimensioni Dimensions	Portata aria mc/h Air flow mc/h	
	Ø	mm	mm	mm	mm	H13	H14
PFA 305	160	595X595	275x275	355	305x305x68	150	150
PFA 395	198	750X595	542x275	395	610x305x68	300	300
PFA 457	160	595X595	424x424	395	457x457x68	337	337
PFA 545	198	645x645	509x509	395	545x545x68	479	479
PFA 575	248	750x750	542x542	445	575x575x68	533	533
PFA 610	248	750x750	577x577	445	610x610x68	600	600
PFA 915	2x198	1055x750	882x577	395	915x610x68	900	900
PFA 1219	2x248	1359x750	1186x577	445	1219x610x68	1200	1200
PFA 1525	2x248	1664x750	1186x577	445	1525x610x68	1499	1499

PFAB

Modello Model	Plenum PFAB				Filtro Filter		
	D	A	B	H	Dimensioni Dimensions	Portata aria mc/h Air flow mc/h	
	Ø	mm	mm	mm	mm	H13	H14
PFAB 305	160	595X595	275x275	240	305x305x68	150	150
PFAB 395	198	750X595	542x275	240	610x305x68	300	300
PFAB 457	160	595X595	424x424	240	457x457x68	337	337
PFAB 545	198	645x645	509x509	240	545x545x68	479	479
PFAB 575	248	750x750	542x542	240	575x575x68	533	533
PFAB 610	248	750x750	577x577	240	610x610x68	600	600
PFAB 915	2x198	1055x750	882x577	240	915x610x68	900	900
PFAB 1219	2x248	1359x750	1186x577	240	1219x610x68	1200	1200
PFAB 1525	2x248	1664x750	1186x577	240	1525x610x68	1499	1499

Filtro: temperatura max 80°C - umidità relativa 100% | Filter: max temperature 80°C - max R.M. 100%

DIFFUSORI | DIFFUSERS

Modello Model	PFABQF	PFABQE1	PFABQE3	PFAAQ01
305				
395				
457				
545				
575				
610				
915				
1219				
1525				

Colore RAL 9016 opaco. Altri colori RAL: prezzi a richiesta
 Color RAL 9016 matt. Different RAL colors: prices on request.

Filtri | Filters PFAFLT

Modello Model	Spessore Thickness	Efficienza Efficiency H13	Efficienza Efficiency H14
mm	mm		
305x305	68		
305x610	68		
457x457	68		
545x545	68		
575x575	68		
610x610	68		
610x915	68		
610x1220	68		
610x1525	68		