



CARACTERÍSTICAS:

Difusores multidireccionales de 4 vías con parte central combinada.

ESTRUCTURA:

Aluminio barnizado RAL 9010.

USO:

Para falso techo modular
Altura de instalación
2,5-3,1 m.

FIJACIÓN:

Fijación en falso techo.

CHARACTERISTICS:

Multidirection diffuser with 4 ways with matched central panel.

CONSTRUCTION:

Aluminium painted RAL 9010.

UTILIZATION:

For modular false-ceiling installation.
Installation height: 2,5-3,1m.


FIXING:

Fixing on false-ceiling.

PRECIOS - PRICES

									Compuerta para plenum Damper for plenum
BxH	BxH	AQC	A	D	PDZ1	PDZ11	PDZ2	PDZ12	
mm	mm	€	mm	mm	€	€	€	€	€
AQC1F	450x450		352	197					
AQC2F	(595 externo cornice)		276	197					
AQC3F	450x450		202	247					
AQC4F	(595 overall size)		127	247					

DIBUJOS - DRAWINGS

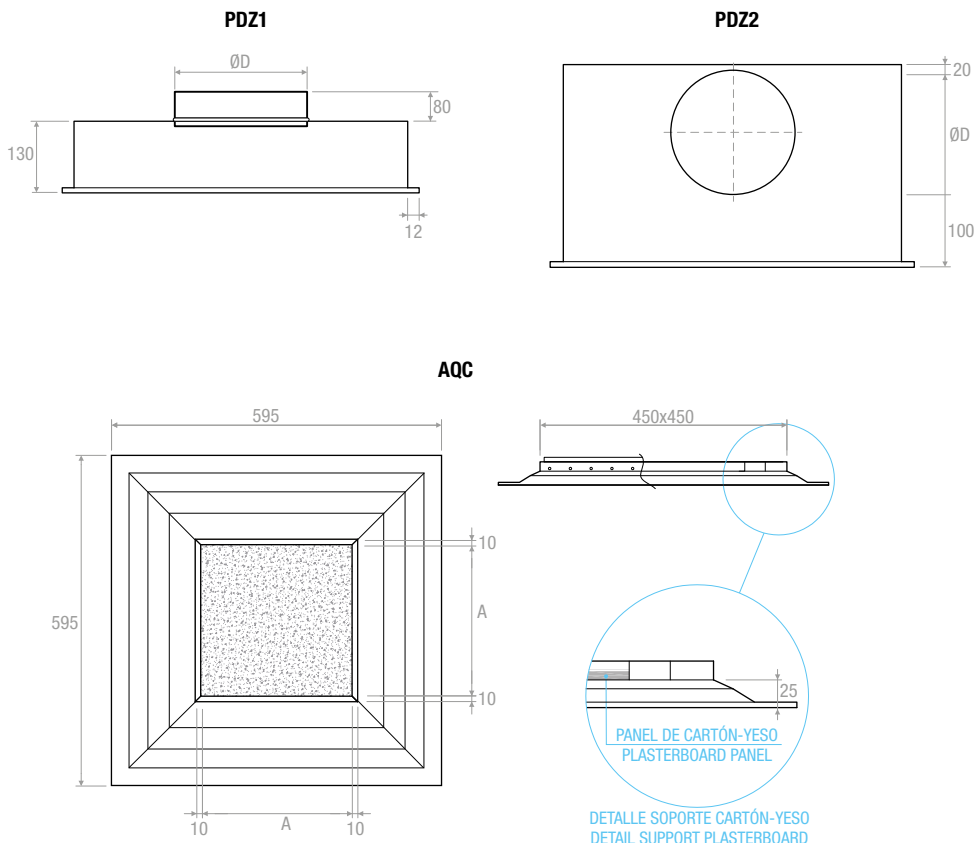

NOTA: Parte central no suministrada
NOTE: Central part not supplied

DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

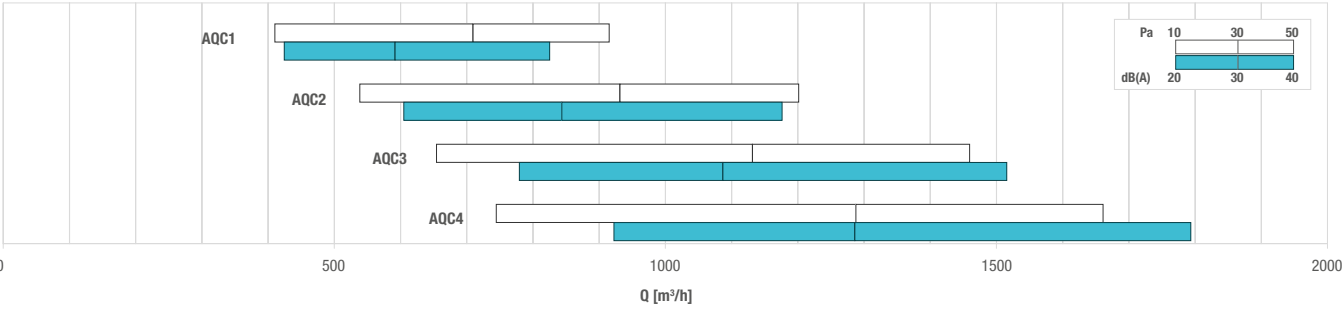


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A _x [m²]	No. Vie N. way	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) [m]		Dp _t [Pa]	
			min	max	min	max	min	max	min	max
AQC1F	0,0438	4	410	920	< 20	43	1,26	6,29	10	50
AQC2F	0,0542	4	540	1200	< 20	41	1,22	6,10	10	50
AQC3F	0,0631	4	650	1460	< 20	39	1,19	5,97	10	50
AQC4F	0,0698	4	740	1660	< 20	38	1,18	5,88	10	50