


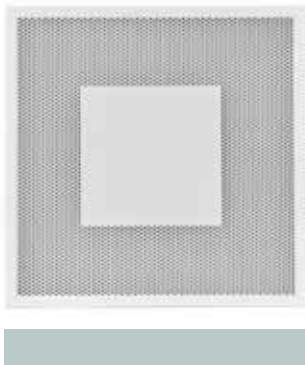

CARACTERÍSTICAS:

Difusores cuadrados perforados, con placa central, dim. 595x595 del marco externo.

ESTRUCTURA:

Bastidor de aluminio, chapa perforada de acero barnizado blanco RAL 9010

USO:

En techo, para impulsión y retorno.
Altura de instalación:
2,5-4,0 m

FIJACIÓN:

Clips (tornillos frontales a petición).

ACCESORIOS:

- Plenum de acero galvanizado estándar o aislado, con o sin chapa ecualizadora.
- Compuerta de calibración de acero galvanizado con lamas de movimiento opuesto.
- Deflectores para orientar la expulsión.

CHARACTERISTICS:

Perforated face square diffusers with central plug, 595x595 mm overall size.

CONSTRUCTION:

Frame in aluminium, perforated sheet steel painted white RAL 9010

UTILIZATION:

For ceiling installation and for air intake (BQF-SM) and delivery (BQF-SMF).
Installation height: 2,5-4,0 m.

FIXING:

Clips (frontal screws on request).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated, with or without equalizer sheet.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Deflectors for throw orientation.

PRECIOS - PRICES

STOCK

	Impulsión - Supply BQCM Con deflector With deflectors	Retorno - Return BQCR Sin deflector Without deflectors	SC	PDZ1	PDZ11	PDZ2	PDZ12
	€	€	€	€	€	€	€
595x595 esterno cornice overall size							

DESCRIPCIONES - DESCRIPTION:

BQCM: Difusor de pantalla perforado con placa central con marco de aluminio y deflectores - Perforated face square diffuser with central plug with aluminium frame and deflectors.

BQCR: Difusor de pantalla perforado con placa central con marco de aluminio, sin deflectores - Perforated face square diffuser with central plug with aluminium frame and without deflectors.


BQCM 595x595 (con deflectores - with deflectors)			
NR	Q caudal de aire airflow	P pérdida de carga pressure drop	V velocidad air velocity
20	430	7	1,2
30	660	17	1,8
40	1000	38	2,8

Altura de instalación 2,5 ÷ 3,5 m.
Installation height 2.5 ÷ 3.5 m.

BQCR 595x595 (sin deflectores - without deflectors)			
NR	Q caudal de aire airflow	P pérdida de carga pressure drop	V velocidad air velocity
20	1250	7	1,5
30	1800	16	2,4
40	2600	35	3,8

Altura de instalación 2,5 ÷ 3,5 m.
Installation height 2.5 ÷ 3.5 m.

DIBUJOS - DRAWINGS

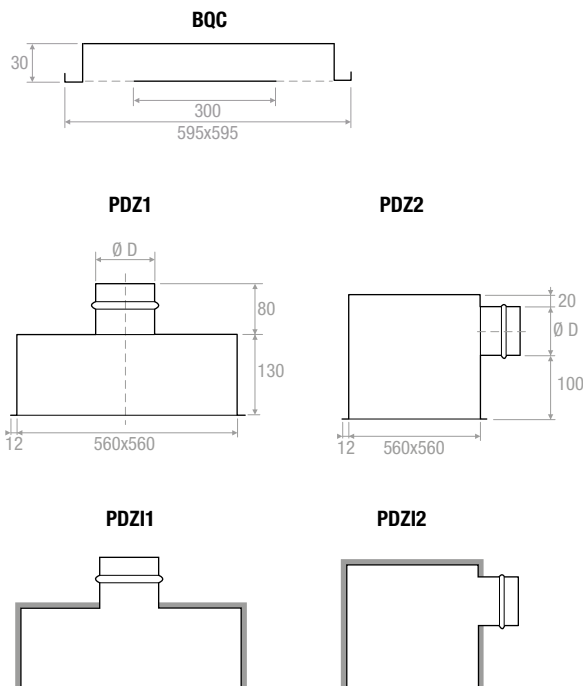

Plenum aislado externamente espesor 6 mm
Plenum externally insulated thickness 6 mm

DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

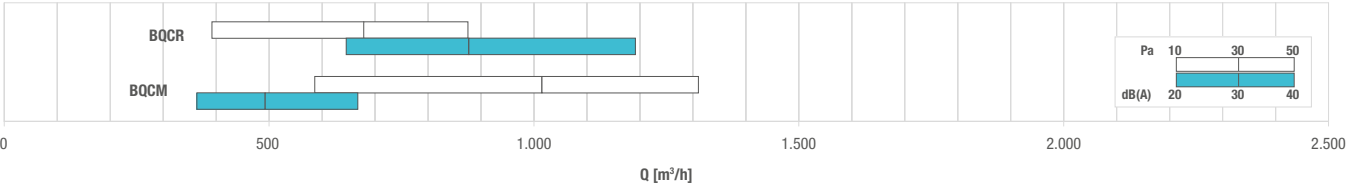


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A _s [m²]	Q [m³/h]		L _{wa} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQCM	0,1044	590	1310	36	62	1,8	4,0	10	50
BQCR	0,1044	390	880	< 20	30	-	-	10	50

