

BQFC60



CARACTERÍSTICAS:

Difusores de panel perforado con marco.

ESTRUCTURA:

Bastidor de aluminio, chapa perforada de acero barnizado blanco RAL 9010.

USO:

En techo, para impulsión y retorno.
Altura de instalación: 2,5-4,0 m

FIJACIÓN:

Clips (tornillos a petición).

ACCESORIOS:

- Plénium de acero galvanizado estándar o aislado, con o sin chapa ecualizadora.
- Compuerta de calibración de acero galvanizado con lamas de movimiento opuesto.

CHARACTERISTICS:

Perforated panel diffusers with frame.

CONSTRUCTION:

Frame in aluminium, perforated sheet steel painted white RAL 9010.

UTILIZATION:

For ceiling installation and for air intake and delivery.
Installation height: 2,5-4,0 m

FIXING:

Clips (frontal screws on request).

ACCESSORIES:

- Galvanized steel plenum, standard or insulated, with or without equalizer sheet.
- Calibration damper made of galvanized steel and fins with opposite movement.




PRECIOS - PRICES

BxH	BQFC60R	SC	PDZ1	PDZ2
mm	€	€	€	€
595x595 del marco externo - overall size				

RETORNO - RETURN

STOCK

DIBUJOS - DRAWINGS

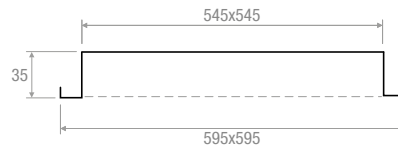

BQFC60R: Retorno / no deflectores - Return / no deflectors

BQFC60MS: Impulsión / deflectores / acople superior - Supply / deflectors / top spigot

BQFC60ML: Impulsión / deflectores / acople lateral - Supply / deflectors / side spigot

Difusores cuadrados perforados con marco 595x595 mm.

Perforated face square diffusers with frame 595x595 mm.

DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

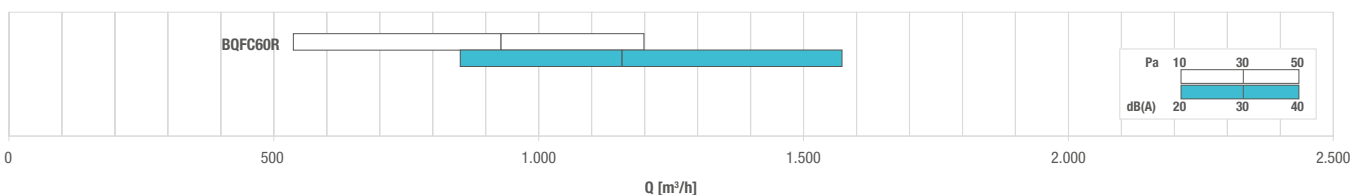


TABLA DE SELECCIÓN RETORNO - SELECTION TABLE RETURN

Modelo - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQFC60R	0,1398	540	1200	< 20	31	-	-	10	50


PRECIOS - PRICES

IMPULSIÓN - SUPPLY


	BQFC60M	Ø B	SC	PDZ1	PDZ11
	€	mm	€	€	€
BQFC60MS 160		158			
BQFC60MS 200		198			
BQFC60MS 250		248			
BQFC60MS 315		313			
	BQFC60M	Ø B	SC	PDZ2	PDZ12
BQFC60ML 160		158			
BQFC60ML 200		198			
BQFC60ML 250		248			
BQFC60ML 315		313			

DIBUJOS - DRAWINGS


Configuraciones de flujos de aire
Air flow configuration



BQFC60M



BQFC60MS

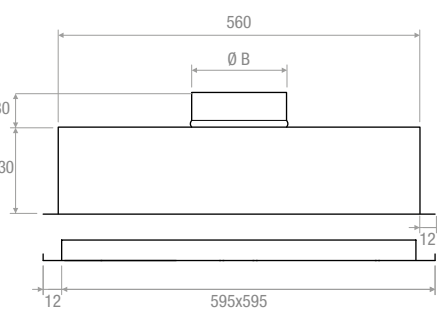

BQFC60ML

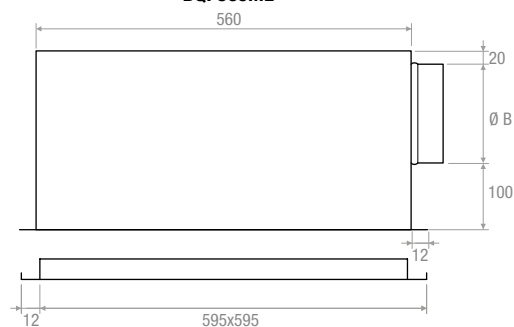


DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

IMPULSIÓN - SUPPLY

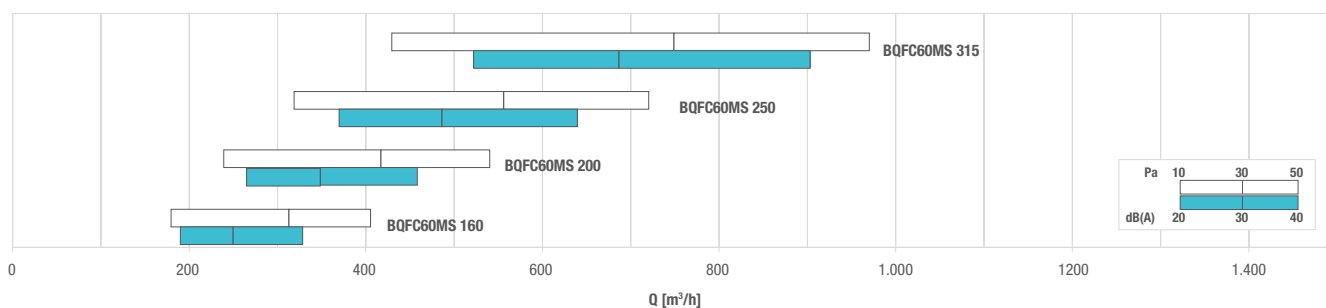
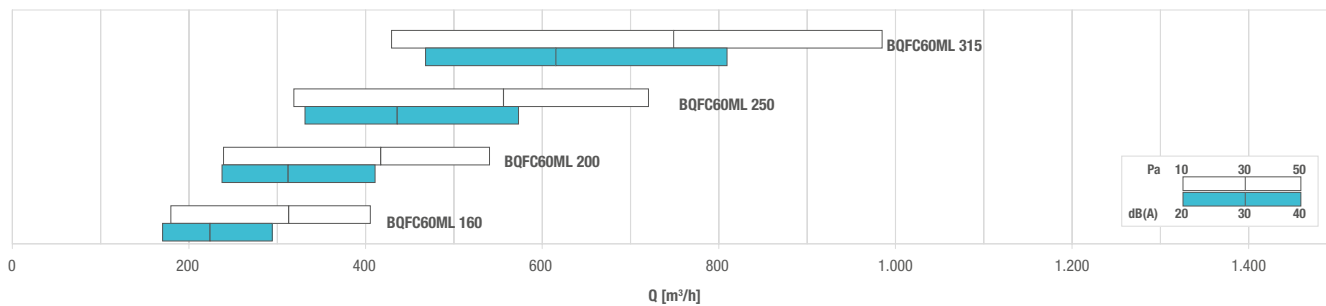


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	Q [m³/h]		L _{wa} [dB(A)]		X _{0,20} [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
BQFC60MS 160	180	410	-	48	1,1	3,4	10	50
BQFC60MS 200	240	540	-	46	1,6	5,1	10	50
BQFC60MS 250	320	720	-	44	2,4	7,7	10	50
BQFC60MS 315	430	970	-	43	3,7	11,8	10	50

Modelo - Model	Q [m³/h]		L _{wa} [dB(A)]		X _{0,20} [m]		Dp _t [Pa]	
	min	max	min	max	min	max	min	max
BQFC60ML 160	180	410	--	52	1,1	3,4	10	50
BQFC60ML 200	240	540	--	50	1,6	5,1	10	50
BQFC60ML 250	320	720	--	48	2,4	7,7	10	50
BQFC60ML 315	430	970	--	47	3,7	11,8	10	50