


PRECIOS - PRICES

	
	€
BQM3	


DIBUJOS - DRAWINGS

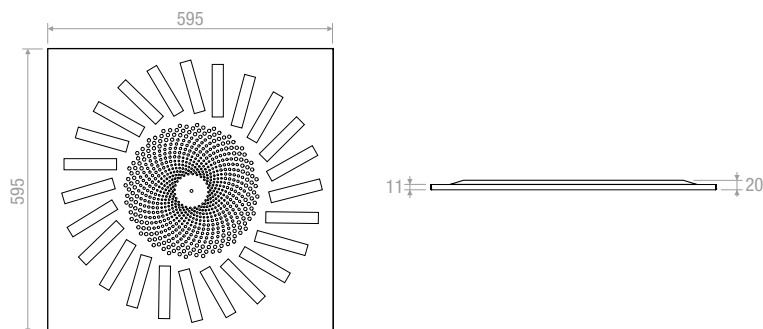

PRECIOS - PRICES PLENUM

	Manguito Spigot							
AxB		PQZ1	PQZ11	PQZ2	PQZ12	Compuerta Damper	Ecuador Equalizer	Puente de fijación Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€
595x595	248							

DIBUJOS - DRAWINGS

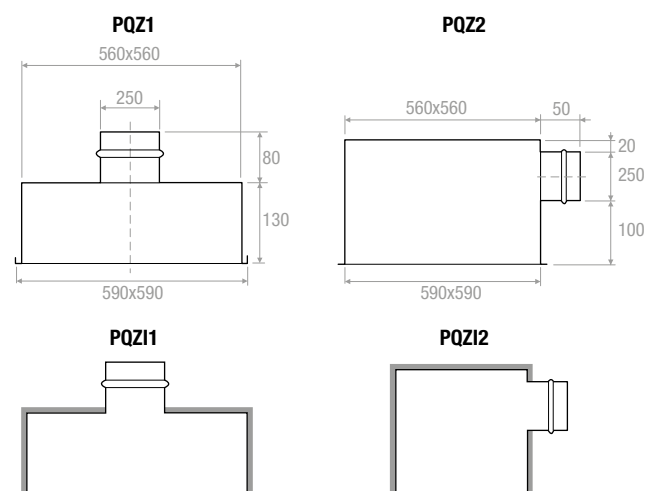


Plénium aislado externamente espesor 6 mm
Plenum externally insulated thickness 6 mm

TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A_k [m ²]	Q [m ³ /h]		L_{wa} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQM3	0,0283	270	520	30	48	3,2	4,3	10	50

BQM3



CARACTERÍSTICAS:

Difusores de flujo helicoidal mixto con chorros regulables.

ESTRUCTURA:

Acero barnizado blanco RAL 9010, deflectores de polipropileno negro RAL 9005.

USO:

En techo, para impulsión y retorno (sin deflectores).
Altura de instalación: 2,5-4,1 m.

FIJACIÓN:

Fijación con tornillos laterales o mediante tornillo central en el puente de montaje.

ACCESORIOS:

Plénium de acero galvanizado estándar o aislado, con o sin chapa ecualizadora, compuerta de calibración y puente de montaje.

CHARACTERISTICS:

Swirl mixed diffusers with adjustable throws.

CONSTRUCTION:

RAL 9010 white painted steel, deflection blades are made of polypropylene RAL 9005 black.

UTILIZATION:

For ceiling installation and for air intake (without deflectors) and delivery.
Installation height: 2,5-4,1 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.