



CARACTERÍSTICAS:

Difusores de flujo helicoidal.

ESTRUCTURA:

Acero barnizado blanco
RAL 9010.

USO:

En techo, para impulsión y retorno.

Altura de instalación:
BQS = 2,6-4,0 m.

FIJACIÓN:

Fijación con tornillos laterales o mediante tornillo central en el puente de montaje.

ACCESORIOS:

Plénium de acero galvanizado estándar o aislado, con o sin chapa ecualizadora, compuerta de calibración y puente de montaje.

CHARACTERISTICS:

Swirl diffusers.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation and for air intake and delivery.

Installation height:
BQS = 2,6-4,0 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:


Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.

PRECIOS - PRICES

■ STOCK

	BQS	BQSC	
mm	€	€	UNIDADES - PIECES
600			5
625			5


DIBUJOS - DRAWINGS

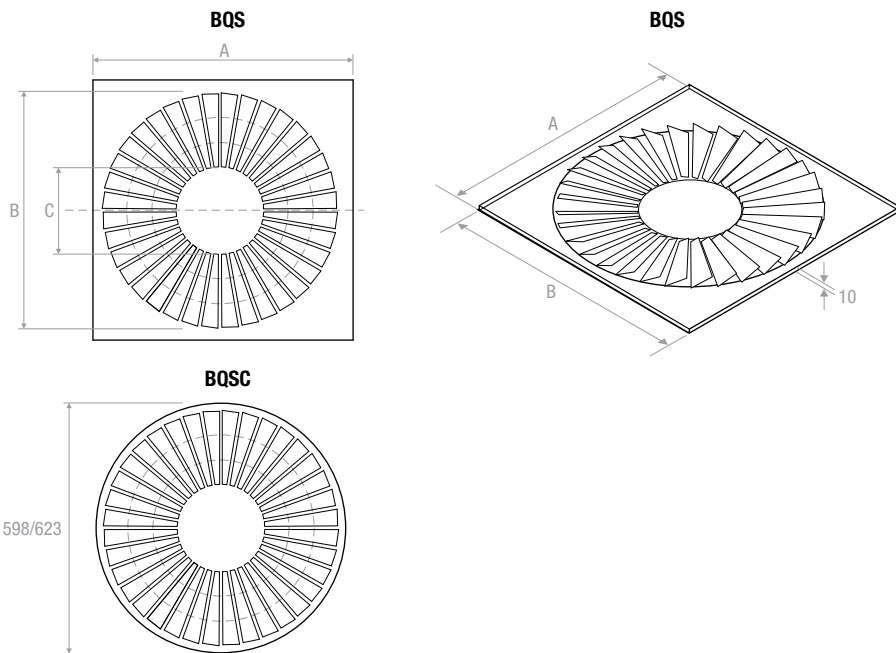

PRECIOS - PRICES PLENUM

	Manguito Spigot							
AxB		PQZ1	PQZ11	PQZ2	PQZ12	Compuerta Damper	Ecualizador Equalizer	Puente de fijación Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€
600	248							
625	298							

DIBUJOS - DRAWINGS

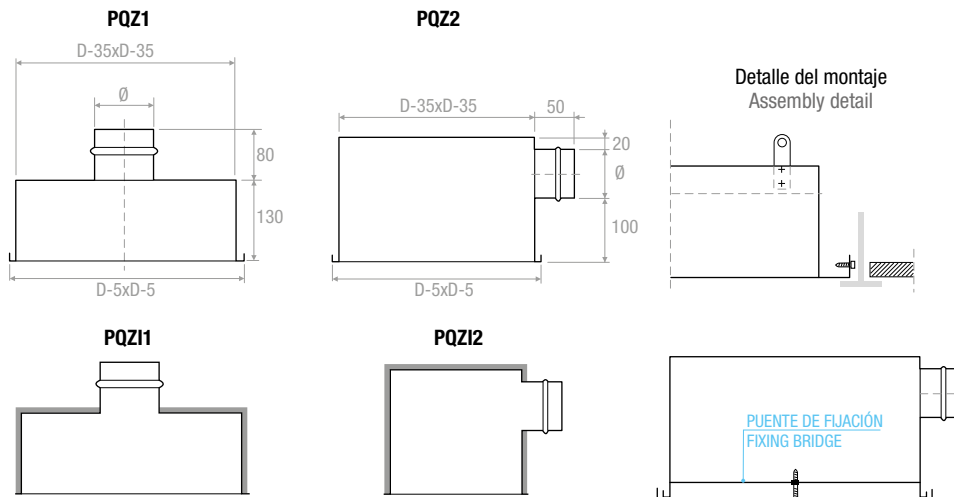

lénium aislado externamente espesor 6 mm
Plenum externally insulated thickness 6 mm

PRECIOS - PRICES PLENUM BQSC

	Plénium galvanizado - Galvanized plenum			PDCQ	PDCQI	Compuerta Damper	Ecuilizador Equalizer	Puente de fijación Fixing bridge
	AxA	ØD	ØE					
mm	mm	mm	mm	€	€	€	€	€
598	700	248	590					
623	700	298	615					

DIBUJOS - DRAWINGS

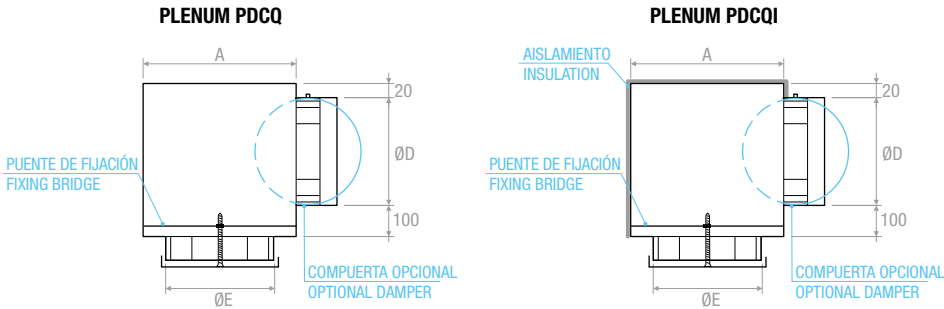


DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

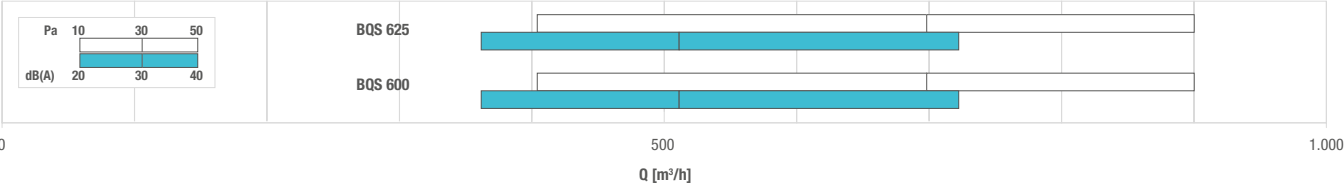


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A_k [m²]	Q [m³/h]		L_{wa} [dB(A)]		$X_{(0,20)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQS 600	0,0368	400	900	23	46	3,3	7,4	10	50
BQS 625	0,0368	400	900	23	46	3,3	7,4	10	50