

BQSN



CARACTERÍSTICAS:

Difusores de flujo helicoidal.

ESTRUCTURA:

Acero barnizado blanco
RAL 9010.

USO:

En techo, para impulsión y retorno.

Altura de instalación:
BQSN = 2,7-3,6 m.

FIJACIÓN:

Fijación con tornillos laterales o mediante tornillo central en el puente de montaje.

ACCESORIOS:

Plenum de acero galvanizado estándar o aislado, con o sin chapa ecualizadora, compuerta de calibración y puente de montaje.

CHARACTERISTICS:

Swirl diffusers.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation and for air intake and delivery.

Installation height:
BQSN = 2,7-3,6 m.

FIXING:

Fixing by using lateral screws or central screw on mounting bridge.

ACCESSORIES:

Galvanized steel plenum, standard or insulated, with or without equalizer sheet, calibration damper and mounting bridge.

PRECIOS - PRICES

STOCK

					
	BQSN			BQSNC	
mm	€		UNIDADES - PIECES	€	
600			5		
625			5		


DESCRIPCIONES - DESCRIPTION:

BQSN: Difusor de flujo helicoidal - Swirl diffuser


BQSNC: Difusor de flujo helicoidal circular - Circular swirl diffuser

DIBUJOS - DRAWINGS

BQSN

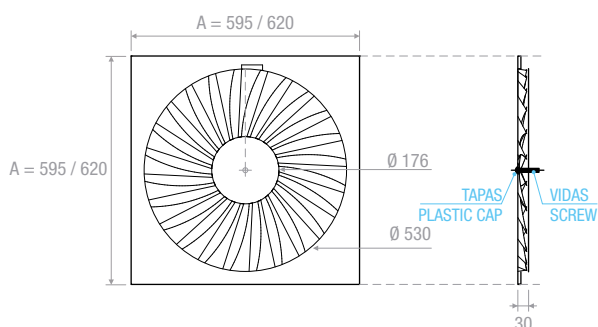

BQSNC

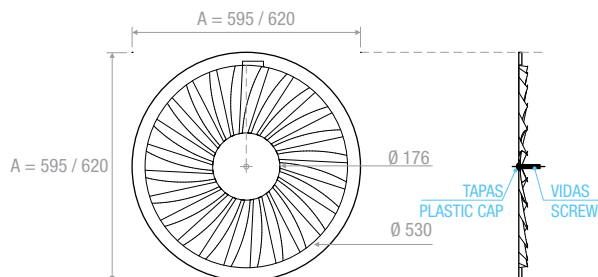

PRECIOS - PRICES PLENUM

	Manguito Spigot							
		PQZ1	PQZ11	PQZ2	PQZ12	Compuerta Damper	Equalizador Equalizer	Puente de fijación Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€
600	248							
625	298							

DIBUJOS - DRAWINGS

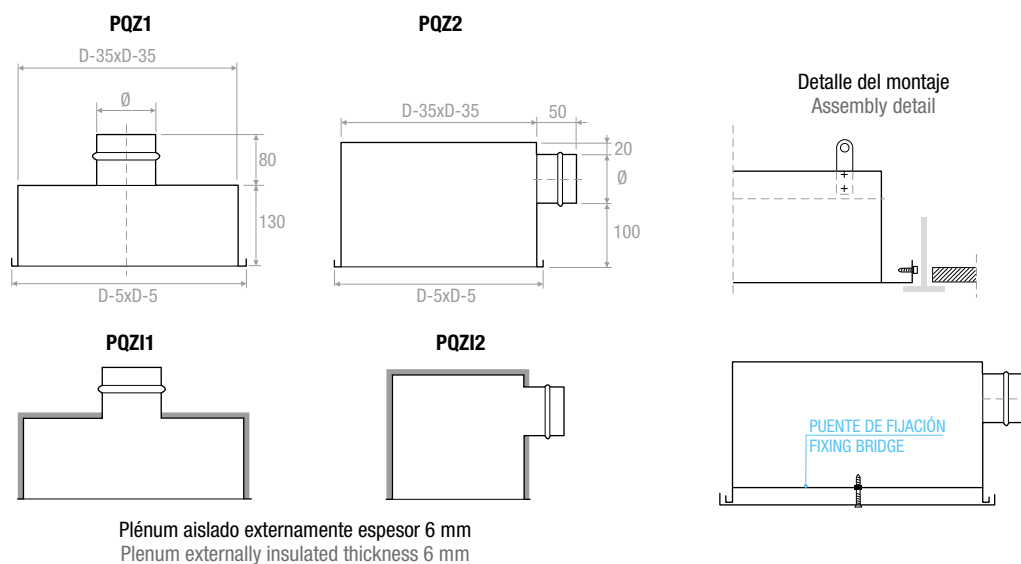


DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

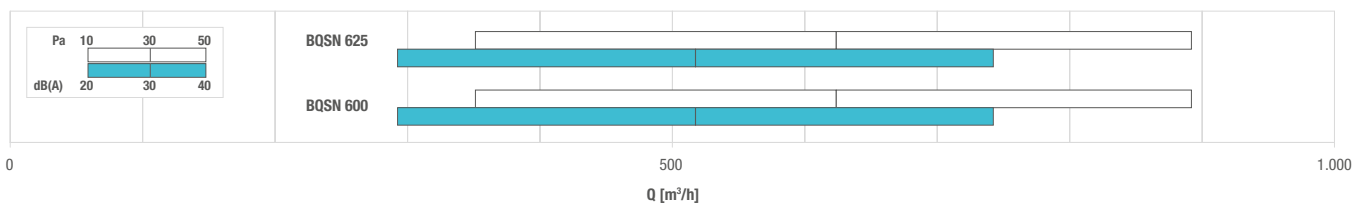


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A _x [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,20) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQSN 600	0,0365	350	810	23	43	3,2	7,3	10	50
BQSN 625	0,0365	350	810	23	43	3,2	7,3	10	50