


PRECIOS - PRICES

					
Modelo Model	DIC2	PQZ2	PQZI2	Compuerta Damper	Ecualizador Equalizer
	€	€	€	€	€
DIC2 125					
DIC2 160					
DIC2 200					
DIC2 250					

DIBUJOS - DRAWINGS

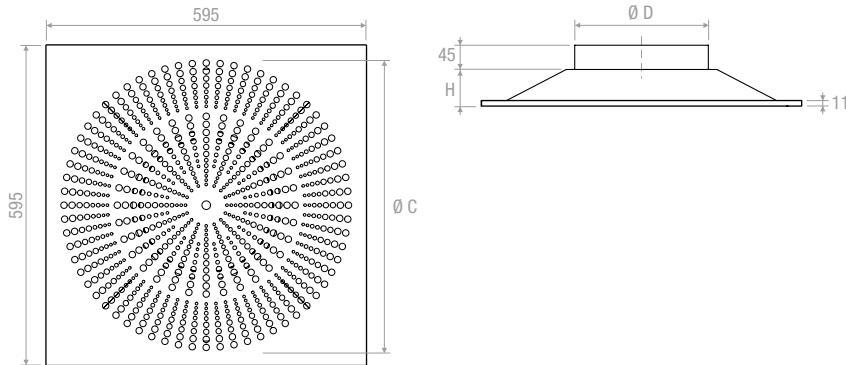

MEDIDAS - SIZES

Tipo - Type	C (mm)	D (mm)	H (mm)
125	314	123	45
160	384	157	55
200	462	197	68
250	540	247	68

DIBUJOS - DRAWINGS


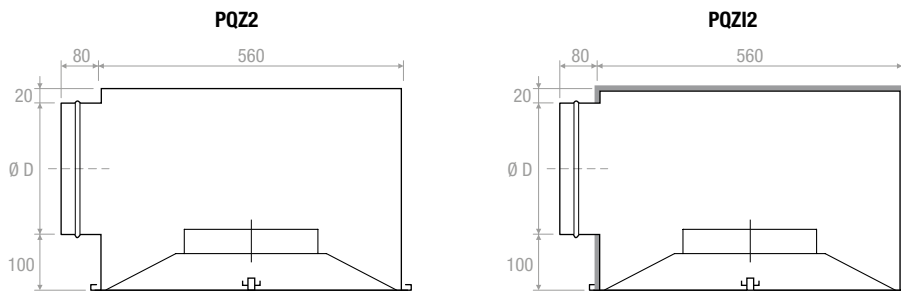


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	P [m³/h]		L _{WA} [dB(A)]		X _{0,20} [m]		Dp _i [Pa]	
	min	max	min	max	min	max	min	max
DIC2 125	55	90	25	40	0,2	0,4	20	40
DIC2 160	100	170	25	40	1,8	2,5	20	40
DIC2 200	210	270	25	40	2,1	3,3	20	40
DIC2 250	270	340	25	40	1,9	2,6	20	40

DIC2



CARACTERÍSTICAS:

Difusor de panel por impulsos con alta capacidad de inducción.

ESTRUCTURA:

Acero barnizado blanco
RAL 9010.

USO:

En techo, para impulsión
Altura de instalación:
2,7-4,1 m.

FIJACIÓN:

Fijación con tornillos laterales
o mediante tornillo central en
puente de montaje.

ACCESORIOS:

Plénium de acero galvanizado
estándar o aislado, con o sin
chapa ecualizadora, compuerta
de calibración y puente de
montaje.

CHARACTERISTICS:

Panel diffuser pulse type with
high inductive capacity.

CONSTRUCTION:

RAL 9010 white painted steel.

UTILIZATION:

For ceiling installation supply
operation.
Installation height: 2,7-4,1 m.

FIXING:

Fixing by using lateral screws
or central screw on mounting
bridge.

ACCESSORIES:

Galvanized steel plenum,
standard or insulated, with
or without equalizer sheet,
calibration damper and
mounting bridge.

