


GMAI60SMF



GMAI



GRI

PRECIOS - PRICES

STOCK

	CON FILTRO WITH FILTER							
BxH	GMAI60SMF	GMAI60SM	FILTRO - FILTER	SC	PDZ1	PDZ11	PDZ2	PDZ1 2
mm	€	€	€	€	€	€	€	€
595x595								

PINTURA - PAINTING:

ACABADO DE ALUMINIO GMAI NO DISPONIBLE. Disponible solo pintado. De listado precios indicado anteriormente, se aplican los aumentos RAL ALUMINIUM FINISHING UNAVAILABLE. Available only the painted version. Apply the ral increase from gross prices.

Colores RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%



Otros colores: precios a petición - Different colors: prices on request

DESCRIPCIONES - DESCRIPTIONS:

GMAI60SMF: Rejilla de malla cuadrada 13x13 mm, inclinada de 45°, desmontable, dimensión 595x595 mm del marco externo, con filtro incluido - Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, with filter

GMAI60SM: Rejilla de malla cuadrada 13x13 mm, inclinada de 45°, desmontable, dimensión 595x595 mm del marco externo, sin filtro - Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, without filter

DIBUJOS - DRAWINGS

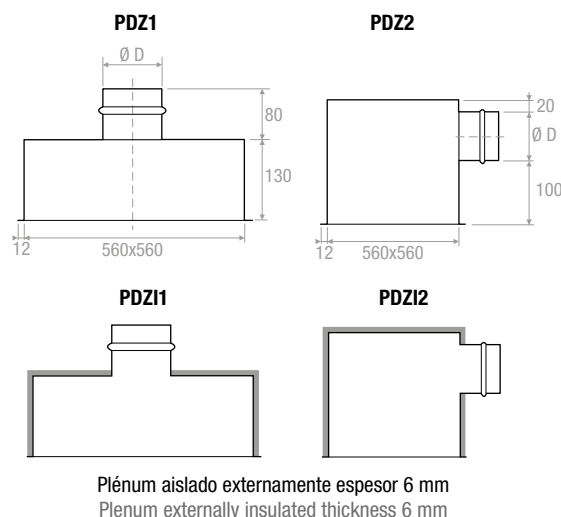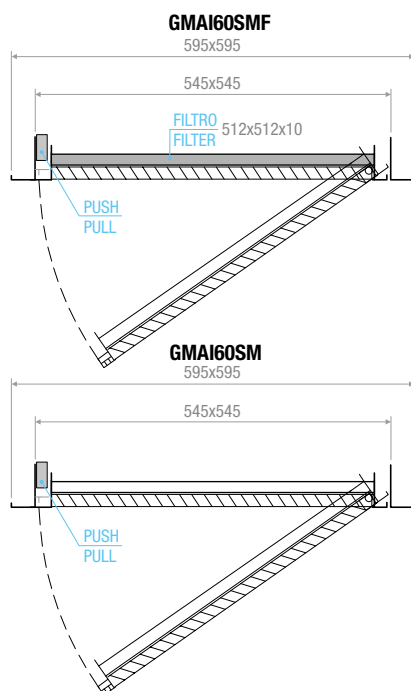

Plenum aislado externamente espesor 6 mm
Plenum externally insulated thickness 6 mm

CARACTERÍSTICAS:

Rejillas de malla cuadrada 13x13 mm, inclinada de 45° desmontable para falso techo, dim. 595x595 del marco externo.

ESTRUCTURA:

Aluminio.

USO:

En falso techo, para retorno.

FIJACIÓN:

Fijación con clips o, a petición, con tornillos frontales.

ACCESORIOS:

- Plenum de acero galvanizado estándar y aislado.
- Compuerta de calibración de acero galvanizado con lamas de movimiento opuesto.

CHARACTERISTICS:

Egg crate grilles 13x13 mm pitch, inclined of 45° with removable core, for false ceilings 595x595 overall size.

CONSTRUCTION:

Aluminium.

UTILIZATION:

For false ceilings installation and for air intake.

FIXING:

Fixing by using clips or frontal screws on demand.

ACCESSORIES:

- Galvanized steel plenum, standard or insulated.
- Calibration damper made of galvanized steel and fins with opposite movement.

DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

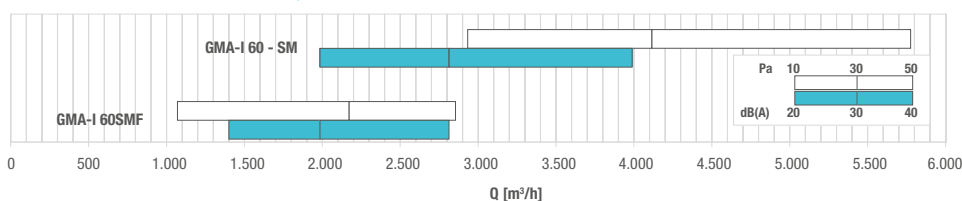


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _i [Pa]	
		min	max	min	max	min	max
GMAI60SM	0,2375	2640	5210	41	60	5	20
GMAI60SMF	0,2375	1070	2860	-	43	10	50

