



ESPECIFICACIONES DEL PLIEGO DE CONDICIONES:

Reguladores de caudal de valor constante para conducto rectangular.

Funcionamiento mecánico automático, sin energía auxiliar para mantener constante el caudal de aire dentro de un rango de presión diferencial.

CARACTERÍSTICAS:

Material: acero galvanizado.

Acabado: galvanizado.

Temperatura de uso:

-20° +70 °C.

USO:

En todos los sistemas de ventilación para el mantenimiento del nivel constante del caudal de aire, independientemente de las variaciones de presión dentro del rango de valores permitidos.

REALIZACIONES ESPECIALES:

Versión RPVRZ con aislamiento acústico espesor 50 mm.

SPECIFICATIONS ITEM:

Air flow constant regulators for rectangular ducts.

Automatic mechanical functioning, without auxiliary energy to maintain air flow constant within a differential pressure range.

CHARACTERISTICS:

Material: galvanised steel.

Finish: zinc coated.

Working temperature:

-20° +70°C.

USE:

For all ventilation systems to maintain air flow constant, independently of the pressure variations within the range of accepted values.

SPECIAL USES:

Version RPVRZ with acoustic insulation 50 mm thickness.





PRECIOS - PRICES

	X	CAUDAL DE AIRE - AIR FLOW RATE		RPVR	RPVRZ
		MIN	MAX	€	€
BxH mm	mm				
200 x 100	62	250	700		
200 x 150	62	400	1000		
200 x 200	62	500	1300		
300 x 100	62	400	1000		
300 x 150	62	500	1500		
300 x 200	62	600	2000		
300 x 250	62	800	2500		
300 x 300	81	1000	3000		
400 x 200	81	900	2700		
400 x 250	87	1200	3400		
400 x 300	81	1500	4200		
400 x 400	*81	1800	5400		
500 x 200	81	1100	3400		
500 x 250	87	1500	4200		
500 x 300	120	1800	4800		
500 x 400	*81	2200	6800		
500 x 500	*87	3000	8400		
600 x 200	120	1500	4000		
600 x 250	120	1800	5000		
600 x 300	120	2100	6000		
600 x 400	*120	3000	8000		
600 x 500	*120	3600	10000		
600 x 600	*120	4200	12000		

* Para B ≥ 400, el regulador está constituido por el ensamblaje de dos unidades en la misma carcasa.

* From B ≥ 400 are assembled from two equal units placed in one case - side to side.

RPVR

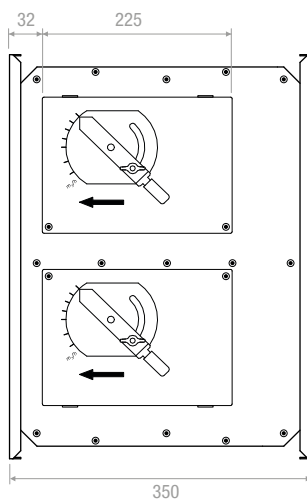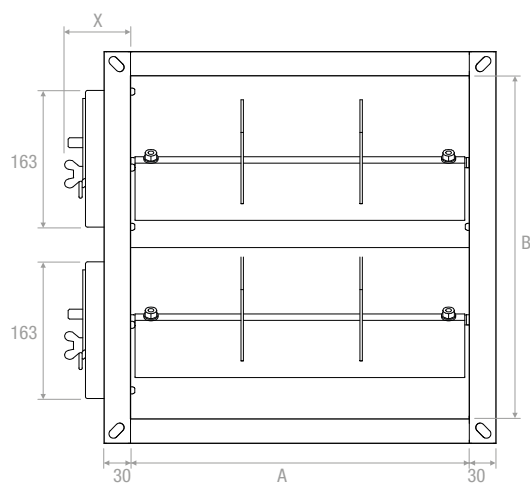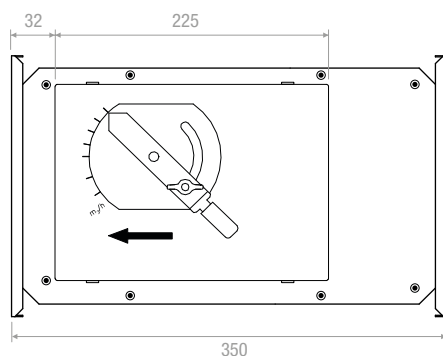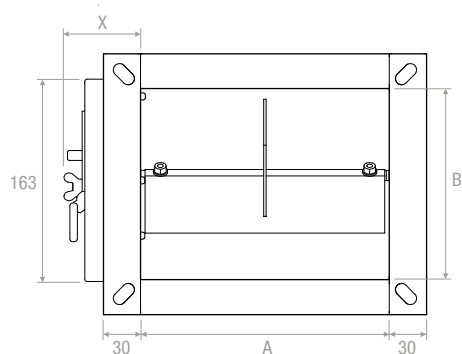

RPVRZ

