

CARACTERÍSTICAS TÉCNICAS - TECHNICAL CHARACTERISTICS

Modelo - Model	10	12	15
V	230	230	230
W	15	20	25
R.P.M.	2500	2450	2100
m³/h	98	190	320
m.m.H ₂ O	3	5	8
Ø mm	100	120	150
dB (A)	38	40	42


PREZZI - PRICES

€			

PRECIOS VERSIÓN S-STANDARD
PRICES VERSION S-STANDARD


ACCESORIOS - ACCESSORIES

Rejillas
Grills




PRECIOS A PETICIÓN - PRICES ON REQUEST

DIMENSIONES - DIMENSIONS

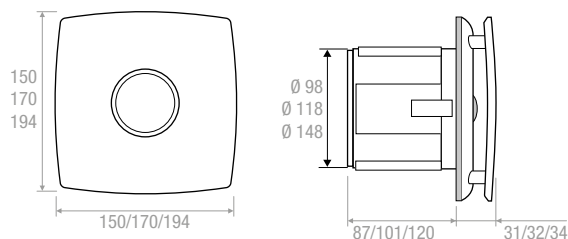

DATOS DE PRESTACIONES - PERFORMANCE DATA

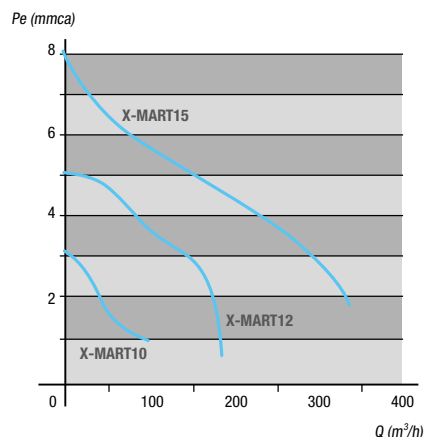

CARACTERÍSTICAS:

SERIE EXCLUSIVA CON TAPA FRONTAL INOXIDABLE.
Tapa frontal extraíble sin utilizar tornillos, para una mejor limpieza. Sistema exclusivo de montaje rápido sin tornillos, RAL 9010.
Totalmente aerodinámico con mayor flujo de aire.
Luz piloto de funcionamiento. Ultrasilencioso.

VERSIONES:

- S-STANDARD funciona con el interruptor de la luz.
- T-TIMER temporizador electrónico regulable (precios a petición).
- H-HYGRO con detector de humedad (precios a petición).

CHARACTERISTICS:

EXCLUSIVE SERIES WITH STAINLESS FRONT PANEL.
Front panel can be removed without the use of screws for easier cleaning, RAL 9010.
Exclusive, screw-free, fast assembly system.
Totally aerodynamic with improved airflow.
Functioning pilot light. Ultra silent.

VERSION:

- S-STANDARD functions with the light switch.
- "T-TIMER" adjustable electronic timer (price on request).
- H-HYGRO with humidity detector (price on request).