

DCPN



CARACTERÍSTICAS:

Difusores circulares de conos regulables en panel.

ESTRUCTURA:

Panel de acero, cono externo y conos intermedios de aluminio, cono central de acero, tornillo de movimiento en ABS y radio en nylon. Pintura mate RAL 9016.

USO:

En techo, para impulsión y retorno.
Altura de instalación:
2,7-3,5 m.

FIJACIÓN:

Fijación con panel en falso techo modular.

ACCESORIOS:

- Plénium de conexión de acero galvanizado.
- Compuerta mariposa de calibración (SF) (regulación mediante tornillo central en la parte frontal del difusor).
- Ecuilizador (EQ).

CHARACTERISTICS:

Circular diffusers with adjustable cones on panel.

CONSTRUCTION:

Steel plate, external and intermediates cones in aluminium, steel central cone, ABS movement screw and nylon support spoke. Matt RAL 9016 painting.

UTILIZATION:

For ceiling installation and for air intake and delivery.
Installation height: 2,7-3,5 m.

FIXING:

Mounting with panel on modular ceiling.

ACCESSORIES:

- Galvanized steel connecting plenum.
- Butterfly damper (SF) with central screw adjustment through the centre of the diffuser.
- Equalizer (EQ).

PRECIOS - PRICES

STOCK

						Compuerta para plénium Damper for plenum	Ecuilizador para plénium Equalizer for plenum
	DCPN	SF	EQ	PDC	PDCI		
mm	€	€	€	€	€	€	€
100							
150							
160							
200							
250							
300							
315							


Otras pinturas: precios a petición - Other RAL colors: price on request

MEDIDAS - MEASURES

Modelo - Model	ØA	B	C	D
100	98	596x596	70	30
150	148	596x596	100	45
160	157	596x596	100	45
200	198	596x596	110	48
250	248	596x596	120	48
300	298	596x596	126	48
315	313	596x596	126	48

DIFUSOR - DIFFUSER

DIBUJOS - DRAWINGS

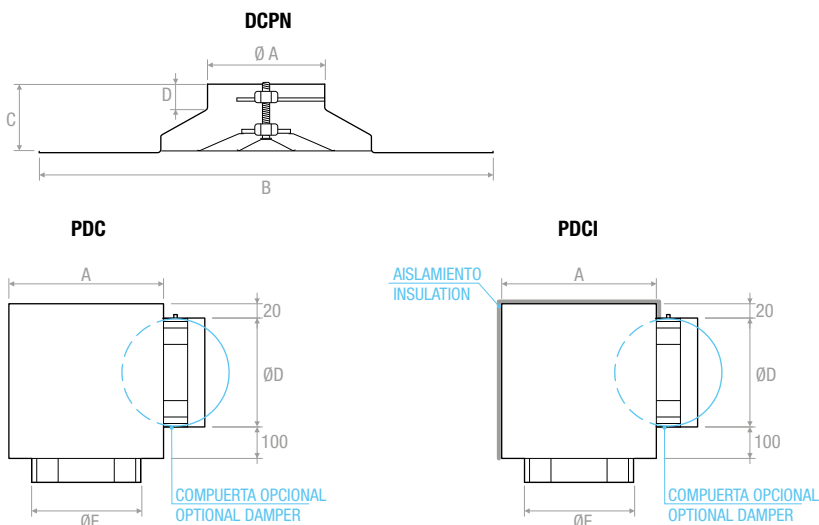

MEDIDAS - MEASURES

PLENUM	AxB	ØD	ØE
PDC 100	200x200	96	102
PDC 150	250x250	146	152
PDC 160	250x250	156	162
PDC 200	300x300	196	202
PDC 250	350x350	196	252
PDC 300	400x400	246	302
PDC 315	400x400	246	317

PLENUM