


PRECIOS - PRICES

	Caudal de aire - Air flow (m³/h)		DCT	DCPT
mm	NR 25	NR 35	€	€
160	170	350		
200	300	600		
250	450	850		
315	600	1200		
355	800	1600		-


DIBUJOS - DRAWINGS

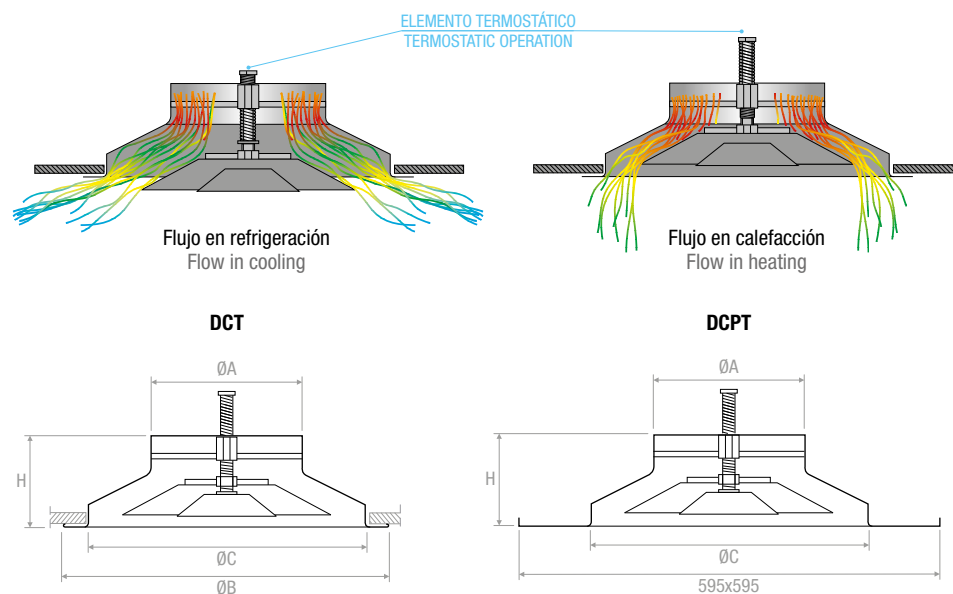

MEDIDAS - MEASURES

	Dimensiones - Dimensions			
Ø A mm	Ø B mm	Ø C mm	H mm	
160	335	280	105	
200	423	360	118	
250	517	445	130	
315	640	560	146	
355	730	640	185	

Muelle termostático
Thermostatic spring



CARACTERÍSTICAS:

Difusor de conos regulables con accionamiento termostático. Modalidades constructivas del difusor como el modelo DC y DCP RAL 9010. Modificación de la geometría de los conos con muelle termostático precalibrado. Funcionamiento en calefacción con diferencia de temperatura hasta 30 °C. Funcionamiento en refrigeración con diferencia de temperatura hasta 16 °C. Posibilidad de versión en panel modelo DCPT.

CHARACTERISTICS:

Adjustable cone diffuser with thermostatic operation. Methods of construction of the diffuser as the model DC and DCP RAL 9010. Changing the geometry of the cones with thermostatic precalibrated spring. Heating operation with temperature difference of up to 30 °C. Cooling operation with temperature difference of up to 16 °C. Executable version on panel model DCPT.