



CARACTERÍSTICAS:

Difusores de boquilla de largo alcance orientables con un ángulo máximo de 30°.

ESTRUCTURA:

Aluminio satinado natural con imprimación transparente.

USO:

En techo o pared, para impulsión.
Altura de instalación:
2,4-11,5 m.

FIJACIÓN:

Fijación, mediante tornillos frontales en el collarín del difusor, al conducto o a la conexión para conducto circular.

ACCESORIOS:

Conexión para conducto circular.
CV: cubretornillo.

CHARACTERISTICS:

Jet diffusers for long throw with orientable nozzle for a maximum angle of 30°.

CONSTRUCTION:

Nature satinized aluminium with transparent primer.

UTILIZATION:

For ceiling or wall installation and for air delivery.
Installation height: 2,4-11,5 m.

FIXING:

Fixing by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.

ACCESSORIES:




Connector for circular duct.
CV: cover screws.

PRECIOS - PRICES


■ STOCK

			
	DU	CV	
mm	€	€	UNIDADES - PIECES
DU 80			120
DU 150			28
DU 200			16


DIBUJOS - DRAWINGS

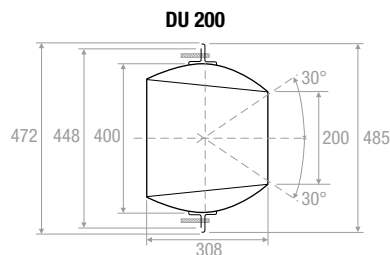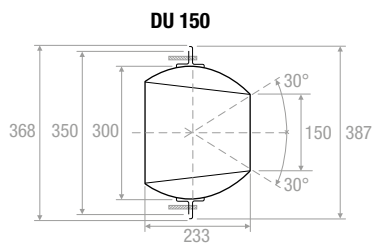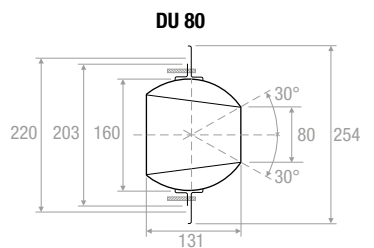


Montaje en conducto
Mounting on the duct




Montaje en conducto circular
Mounting on the circular duct



Montaje con tubo flexible
Mounting by flexible duct



Montaje en batería
Mounting in battery



MEDIDAS - MEASURES

Modelo - Model	A	F	I
DU 80	200	207	300
DU 150	300	354	430
DU 200	350	452	430

DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

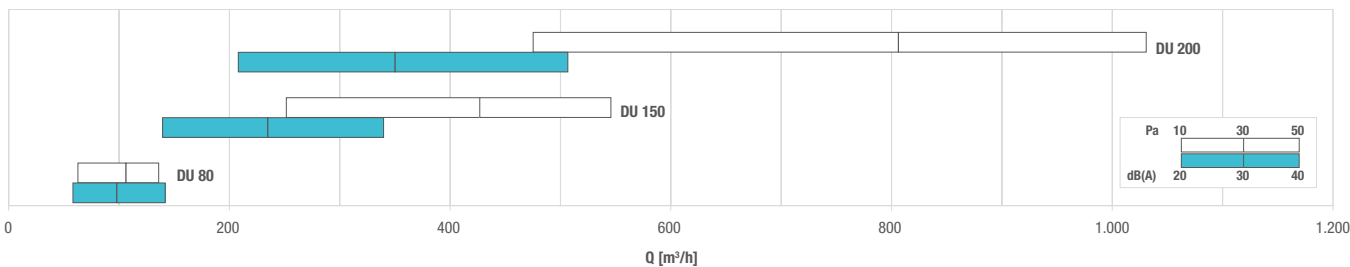


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) - Y _(0,25) [m]		Dp _i [Pa]	
		min	max	min	max	min	max	min	max
DU 80	0,0050	60	140	20	40	8,1	18,9	10	50
DU 150	0,0176	250	550	31	58	11,9	26,2	10	50
DU 200	0,0314	480	1030	38	69	14,0	30,1	10	50