



CARACTERÍSTICAS:

Rejilla de retorno portafiltro con lamas fijas inclinadas de 45° para el alojamiento y la sustitución del filtro.

ESTRUCTURA:

Aluminio anodizado.

USO:

En pared/techo, para retorno.

FIJACIÓN:

Con clips (con tornillos bajo pedido y obligatorio para instalación en forjado).

CIERRE:

Con Push/Pull.

ACCESORIOS:

Compuerta de regulación en acero galvanizado con aletas de movimiento opuesto.

CHARACTERISTICS:

Return filter grille (bers inclined 45°). Removable core for filter insertion and removal.

CONSTRUCTION:

Anodized aluminium.

UTILIZATION:

For wale/ceiling installation and for air intake.

FIXING:

By clips
(frontal screws on request mandatory for ceiling installation).

CLOSING:

By push/pull.

ACCESSORIES:

SCSM: calibration damper made of galvanized steel and blades with opposite movement.

PRECIOS - PRICES

	DIMENSIONES - DIMENSION B mm						
	200	300	400	500	600	800	1000
H mm	€	€	€	€	€	€	€
200							
300							
400							
500							
600							

N.B.: precios con filtro incluido - prices with filter included


PRECIOS SCSM - SCSM PRICES

Base mm	Altura mm	€
200	200	
300	200	
400	200	
500	200	
600	200	
800	200	
1000	200	
200	300	
300	300	
400	300	
500	300	
600	300	
800	300	
1000	300	
200	400	
300	400	
400	400	
500	400	
600	400	
800	400	
1000	400	
200	500	
300	500	
400	500	
500	500	
600	500	
800	500	
1000	500	
200	600	
300	600	
400	600	
500	600	
600	600	
800	600	
1000	600	

PINTURA - PAINTING:

Colores RAL 9010 - 9016: + 15% - Color RAL 9010 - 9016: + 15%
Otros colores: precios a petición - Different colors: prices on request

DIBUJOS - DRAWINGS

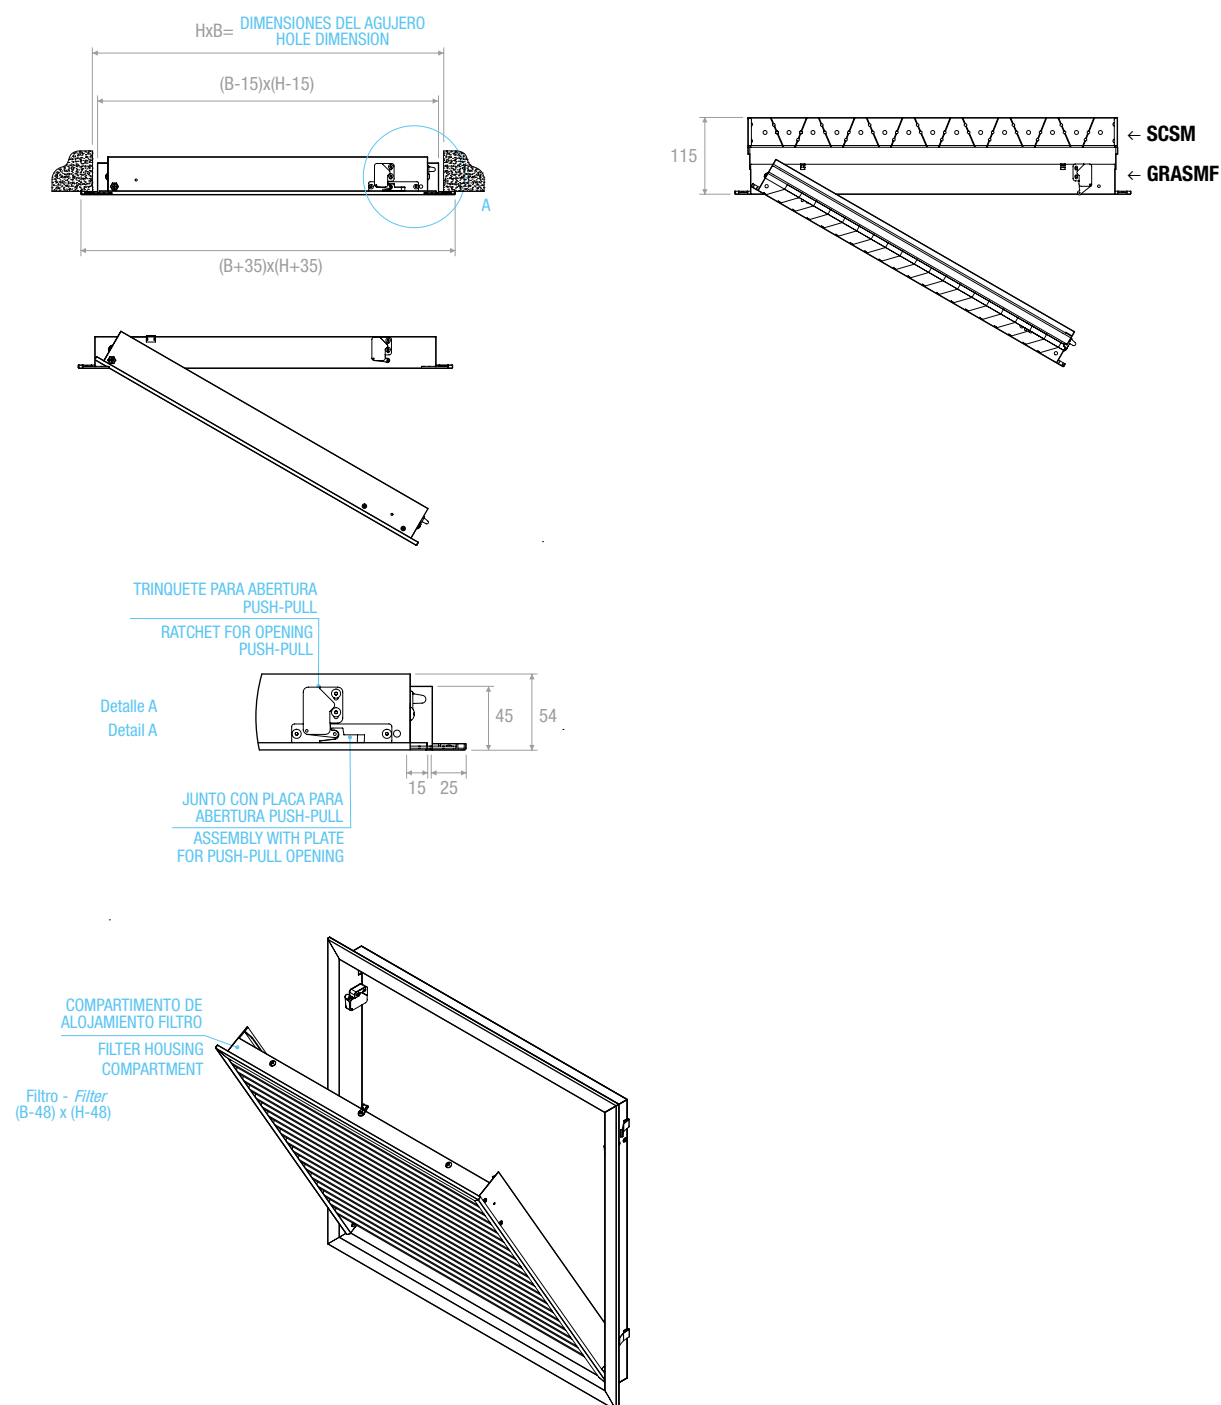

DIMENSIONES FILTRO - FILTER DIMENSIONS

 H mm	Dimensión - Dimension B mm						
	200	300	400	500	600	800	1000
200	152x152	252x152	352x152	452x152	552x152	752x152	952x152
300	152x252	252x252	352x252	452x252	552x252	752x252	952x252
400	152x352	252x352	352x352	452x352	552x352	752x352	952x352
500	152x452	252x452	352x452	452x452	552x452	752x452	952x452
600	152x552	252x552	352x552	452x552	552x552	752x552	952x552



DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

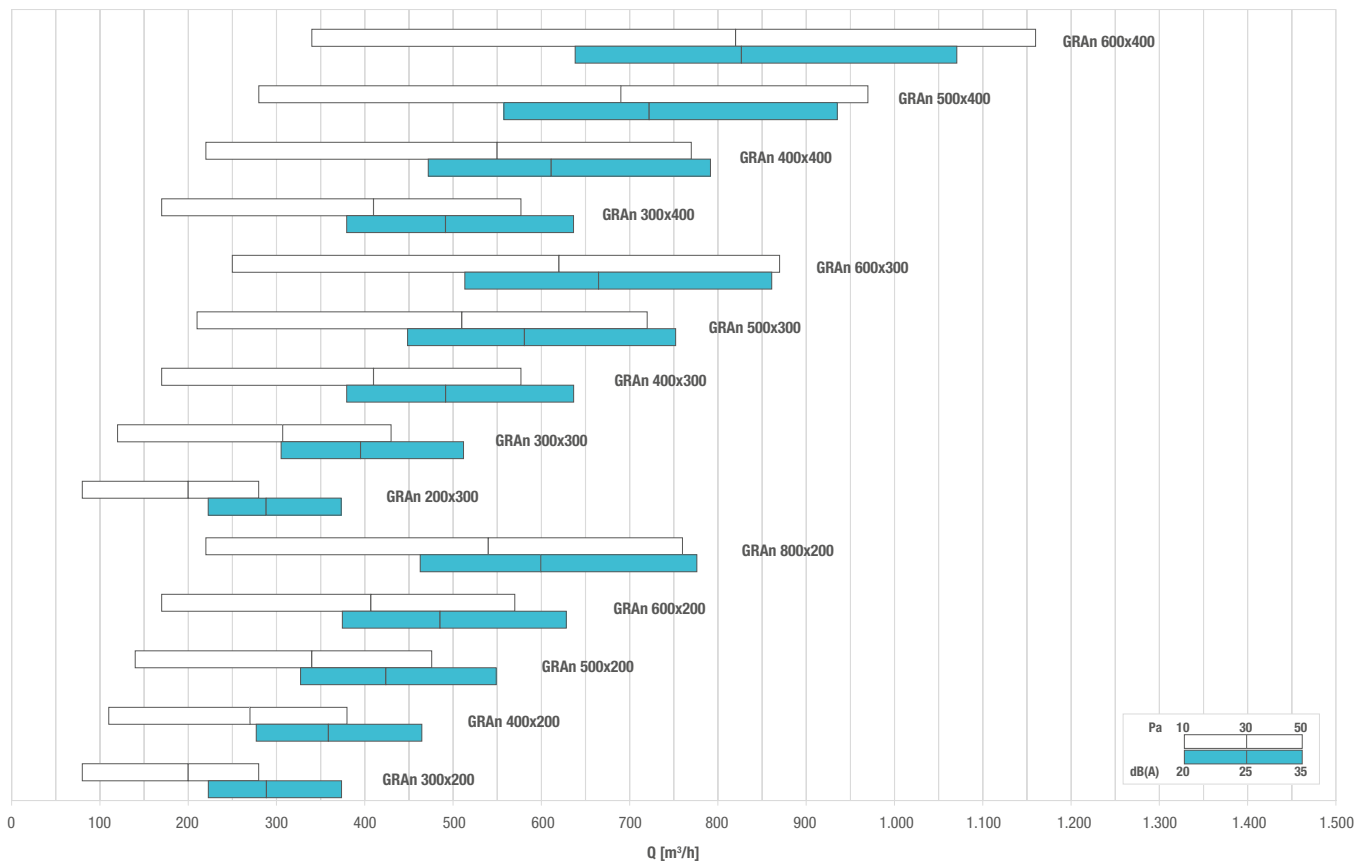


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A _k [m²]	Q [m³/h]		L _{wa} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
GRA n° 200x200	0,0227	50	190	-	23	10	50
GRA n° 300x200	0,0353	80	280	-	24	10	50
GRA n° 400x200	0,0478	110	380	-	26	10	50
GRA n° 500x200	0,0604	140	480	-	27	10	50
GRA n° 600x200	0,0730	170	570	-	28	10	50
GRA n° 800x200	0,0982	220	760	-	30	10	50
GRA n° 200x300	0,0352	80	280	-	24	10	50
GRA n° 300x300	0,0548	120	430	-	27	10	50
GRA n° 400x300	0,0744	170	580	-	28	10	50
GRA n° 500x300	0,0940	210	720	-	29	10	50
GRA n° 600x300	0,1136	250	870	-	30	10	50
GRA n° 800x300	0,1528	330	1160	-	32	10	50
GRA n° 200x400	0,0478	110	380	-	26	10	50
GRA n° 300x400	0,0744	170	580	-	28	10	50
GRA n° 400x400	0,1010	220	770	-	29	10	50
GRA n° 500x400	0,1276	280	970	-	31	10	50
GRA n° 600x400	0,1542	340	1160	-	32	10	50
GRA n° 800x400	0,2073	460	1560	-	33	10	50
GRA n° 200x500	0,0603	140	480	-	27	10	50
GRA n° 300x500	0,0939	210	720	-	29	10	50
GRA n° 400x500	0,1275	280	960	-	31	10	50
GRA n° 500x500	0,1611	350	1210	-	32	10	50
GRA n° 600x500	0,1947	420	1460	-	33	10	50
GRA n° 800x500	0,2619	560	1960	-	34	10	50
GRA n° 200x600	0,0729	160	570	-	28	10	50
GRA n° 300x600	0,1135	250	870	-	30	10	50
GRA n° 400x600	0,1541	340	1160	-	32	10	50
GRA n° 500x600	0,1947	430	1460	-	33	10	50
GRA n° 600x600	0,2353	510	1760	-	34	10	50
GRA n° 800x600	0,3165	690	2350	-	35	10	50
GRA n° 200x800	0,0980	220	760	-	30	10	50
GRA n° 300x800	0,1526	330	1160	-	32	10	50
GRA n° 400x800	0,2072	440	1560	-	33	10	50
GRA n° 500x800	0,2618	560	1960	-	34	10	50
GRA n° 600x800	0,3164	680	2350	-	35	10	50
GRA n° 800x800	0,4256	910	3150	-	37	10	50