


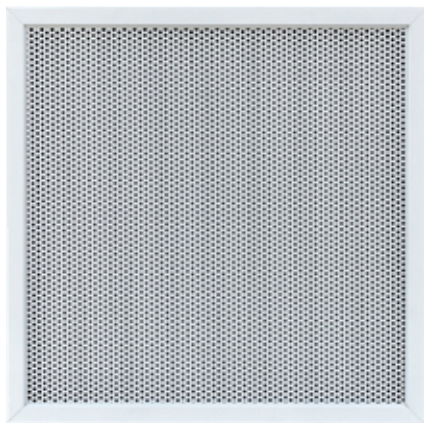

BQFC60


- Características:** difusores cuadrados perforados con marco.
- Construcción:** marco de aluminio, chapa perforada de acero pintado blanco RAL 9016 mate.
- Uso:** en techo, en impulsión y recuperación. Altura de instalación: 2,5-4,0 m.
- Fijación:** clips (con orificios para tornillos bajo pedido).
- Accesorios:**
- Plenum de acero galvanizado:
 - Con o sin aislamiento.
 - Con o sin ecualizador.
 - Compuerta de calibración de acero galvanizado con aletas de funcionamiento contrapuesto.

- Characteristics:** perforated panel diffusers with frame.
- Finishing:** frame in aluminium, perfored sheet steel painted white RAL 9016 matt.
- Utilization:** for ceiling installation and for air intake and delivery. Installation height: 2,5-4,0 m.
- Fixing:** clips (through hole on request).
- Accessories:**
- Galvanized steel plenum:
 - With or without insulation.
 - With or without equalizer sheet.
 - Calibration damper made of galvanized steel and opposed blades.

MODELOS MODELS	
BQFC60R	Recuperación / no deflectores Return / no deflectors
BQFC60M	Impulsión / deflectores Supply / deflectors



DIBUJOS | DRAWINGS

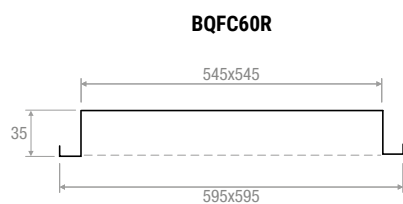

PLENUM | PLENUM


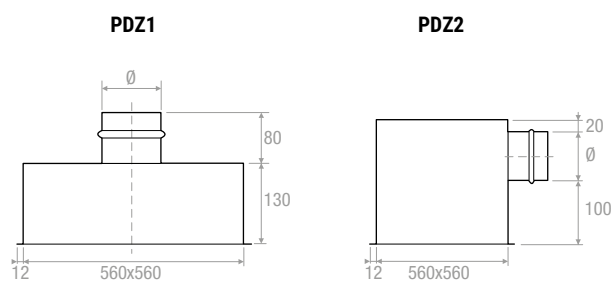


TABLA DE SELECCIÓN | TECHNICAL DATA

Modelo Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,25)}-Y_{(0,25)}$ [m]		Dp_t [Pa]	
		mín	máx	mín	máx	mín	máx	mín	máx
BQFC60R	0,1398	540	1200	< 20	31	-	-	10	50

BQFC60

DIBUJOS | DRAWINGS

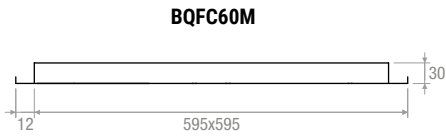

CONFIGURACIONES DE FLUJOS DE AIRE | AIR FLOW DIRECTIONS


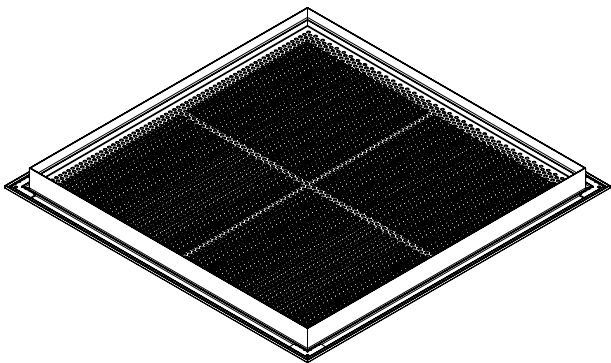



TABLA DE SELECCIÓN | SELECTION TABLE

Modelo Model	Q [m³/h]		L _{WA} [dB(A)]		X _(0,20) [m]		Dp _i [Pa]	
	mín	máx	mín	máx	mín	máx	mín	máx
BQFC60M 160	180	410	-	48	1,1	3,4	10	50
BQFC60M 200	240	540	-	46	1,6	5,1	10	50
BQFC60M 250	320	720	-	44	2,4	7,7	10	50
BQFC60M 315	430	970	-	43	3,7	11,8	10	50

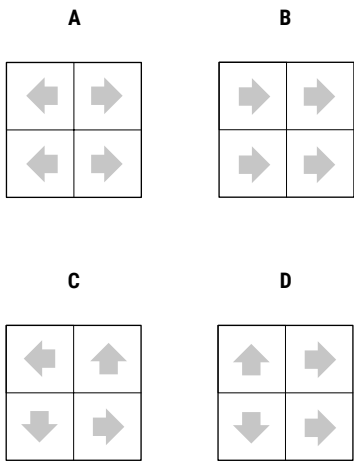

PRECIOS | PRICES

RECUPERACIÓN | RETURN

						
BxH	Ø	D	BQFC60R	SC	PDZ1	PDZ2
mm	mm	mm	€	€	€	€
595x595 externo marco overall size	248	595				

IMPULSIÓN | SUPPLY

								
	Ø	D	BQFC60M	SC	PDZ1	PDZ11	PDZ2	PDZ12
	mm	mm	€	€	€	€	€	€
BQFC60M 160	158	595						
BQFC60M 200	198	595						
BQFC60M 250	248	595						
BQFC60M 315	313	595						