


BVE 8 10 12 15 S



Características: Diseño totalmente integrable en pared o techo, RAL 9010. Instalación sin tornillos. Ultrasilencioso.

Characteristics: design can be fully integrated into the wall or ceiling, RAL 9010. Screw-free installation. Ultra-silent.


DIBUJOS | DRAWINGS

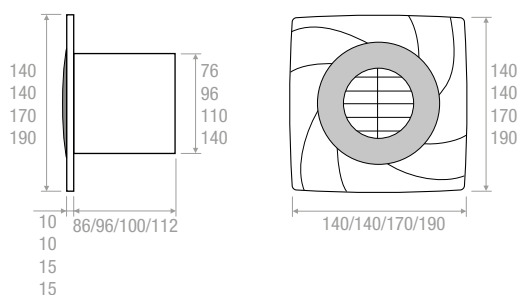

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS


Modelo Model	8	10	12	15
V	230	230	230	230
W	15	15	20	25
R.P.M.	2500	2500	2450	2100
m³/h	70	98	190	320
m.m.H ₂ O	3	3	5	8
Ø mm	90	100	120	150
dB	39	39	41	43

TABLA DE PRESTACIONES | PERFORMANCE TABLE

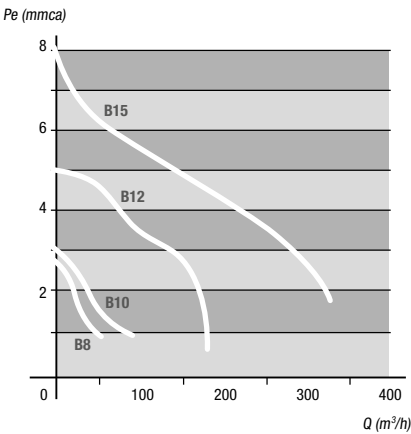

ACCESORIOS | ACCESSORIES

BVEG
Rejillas de expulsión
Expulsion grille



BVESK
Compuerta de sobrepresión
Overpressure damper



Precios bajo pedido - Prices on request

PRECIOS | PRICES

stock

Modelo Model	8	10	12	15
	€	€	€	€