


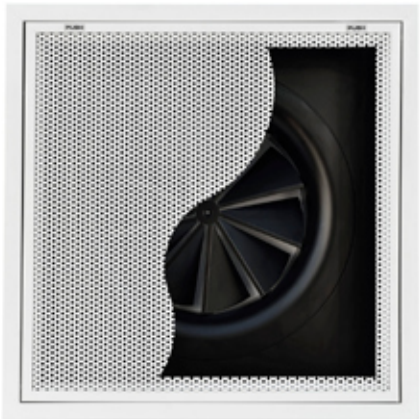

DEESP

Características: difusores circulares de geometría fija y efecto helicoidal en panel con pantalla de chapa perforada.

Construcción: pantalla perforada de acero pintado blanco RAL 9016 mate. Difusor circular negro RAL 9005.

Uso: en techo en impulsión o recuperación. Altura de instalación: 2,8-3,2 m.

Fijación: mediante tornillos en el cuello del difusor.

Accesorios:

- Plenum de acero galvanizado:
 - Con o sin aislamiento.
 - Con o sin ecualizador.
 - Con o sin compuerta de regulación.

Characteristics: fixed geometry circular diffuser with helical effect on perforated panel.

Finishing: perforated plate white RAL 9016 matt. Swirl diffuser black RAL 9005.

Utilization: ceiling installation for air supply or return. Installation height: 2,8-3,2 m.

Fixing: by screws on neck diffuser.


Accessories:

- Galvanized steel plenum box:
 - With or without insulation.
 - With or without air equalizer.
 - With or without damper.

MODELOS | MODELS

DEESP	Difusor circular de efecto helicoidal en panel perforado fijo 595x595 mm Fixed geometry swirl diffuser on panel 595x595 mm
DEESPR	Difusor circular de efecto helicoidal en panel perforado desmontable 595x595 mm Swirl diffuser on removable perforated panel 595x595 mm

DIBUJOS | DRAWINGS

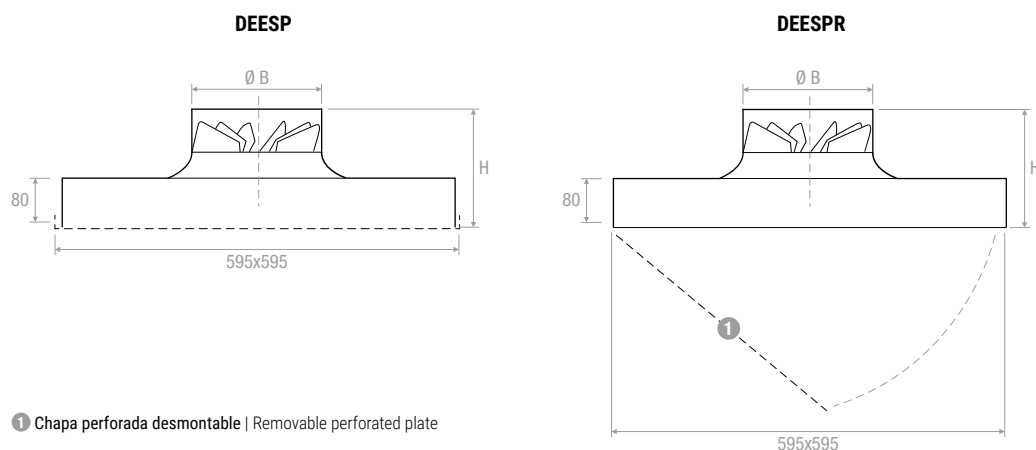


Dimensiones nominales Ø
Nominal dimensions Ø

	DEESP	
	ØB	H
mm	mm	mm
100	98	150
125	123	150
160	158	150
200	198	150
250	248	150
315	313	170
400	398	200
500	498	150

PLENUM PDC mm

AxA	ØD	ØE
mm	mm	mm
200x200	96	102
200x200	96	127
250x250	156	162
300x300	156	202
350x350	196	252
400x400	246	317
500x500	311	402
600xX600	396	503

PLENUM | PLENUM

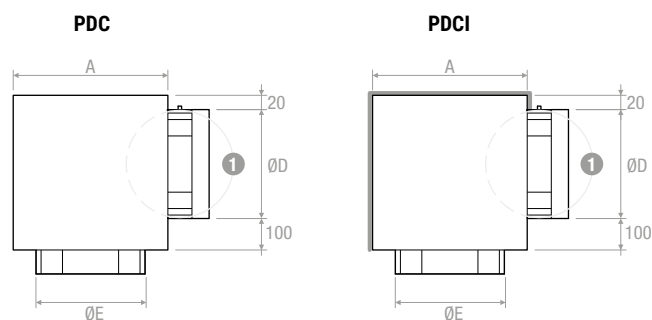

1 Compuerta (bajo pedido) | Damper (on request) Plenum aislado externamente 6 mm de espesor
Plenum externally insulated thickness 6 mm

APERTURA PARA INSPECCIÓN | OPENING FOR INSPECTION

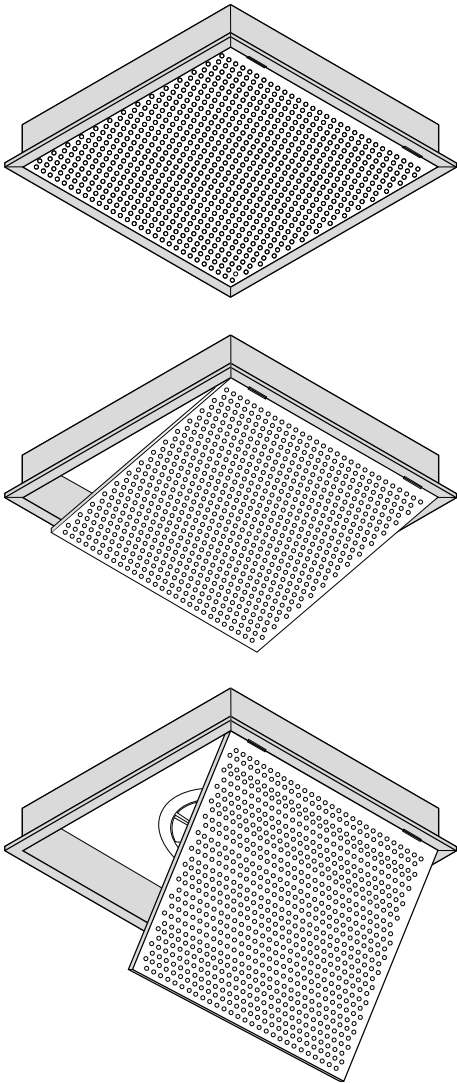


TABLA DE SELECCIÓN | TECHNICAL DATA

Modelo Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)}$ [m]		Dp_t^* [Pa]	
		mín	máx	mín	máx	mín	máx	mín	máx
DEESP 100	0,01550	60	130	36	61	0,92	1,54	10	50
DEESP 125	0,01978	80	170	31	55	1,03	1,71	10	50
DEESP 160	0,02737	110	240	27	51	1,14	1,94	10	50
DEESP 200	0,03833	150	330	23	48	1,26	2,15	10	50
DEESP 250	0,05545	220	480	23	48	1,44	2,44	10	50
DEESP 315	0,08341	330	720	25	49	1,66	2,81	10	50
DEESP 400	0,12966	510	1110	29	54	1,94	3,28	10	50
DEESP 500	0,19816	780	1700	38	63	2,28	3,86	10	50

* Con compuerta | With damper

PRECIOS | PRICES

					Compuerta para plenum Damper for plenum	Ecualizador para plenum Equalizer for plenum
Ø	DEESP	DEESPR	PDC	PDCI		
mm	€	€	€	€	€	€
100						
125						
160						
200						
250						
315						
400						
500						