

GMA60SMF

Características: Rejillas de malla cuadrada 13x13 mm, desmontable para falso techo dim. 595x595 externo marco.

Construcción: aluminio anodizado.

Uso: en falso techo, en recuperación.

Fijación: con clips o bajo pedido con orificios para tornillos frontales.

Accesorios:

- Plenum de acero galvanizado con o sin aislamiento.
- Compuerta de calibración de acero galvanizado con aletas de movimiento contrario.

Characteristics: egg crate grilles 13x13 mm pitch, with removable core for false ceilings 595x595 overall size.

Finishing: anodized aluminium.

Utilization: for false ceilings installation and for air intake.

Fixing: by using clips or holes for frontal screws on request.

Accessories:

- Galvanized steel plenum box with or without insulation.
- Calibration damper made of galvanized steel and fins with opposite movement.

MODELOS | MODELS


GMA60SMF Rejilla de malla cuadrada 13x13 mm, desmontable dimensión 595x595 mm con filtro incluido
Egg crate grille 13x13 mm pitch with removable core, 595x595 mm overall size, with filter

GMA60SM Rejilla de malla cuadrada 13x13 mm, desmontable dimensión 595x595 mm sin filtro
Egg crate grille 13x13 mm pitch with removable core, 595x595 mm overall size, without filter


PINTURA | PAINTING

Colores RAL 9016 mate, RAL 9010 brillante: + 15% - Otros colores RAL: precios bajo pedido
Color RAL 9016 matt, RAL 9010 glossy: + 15% - Different RAL colors: prices on request

DIBUJOS | DRAWINGS

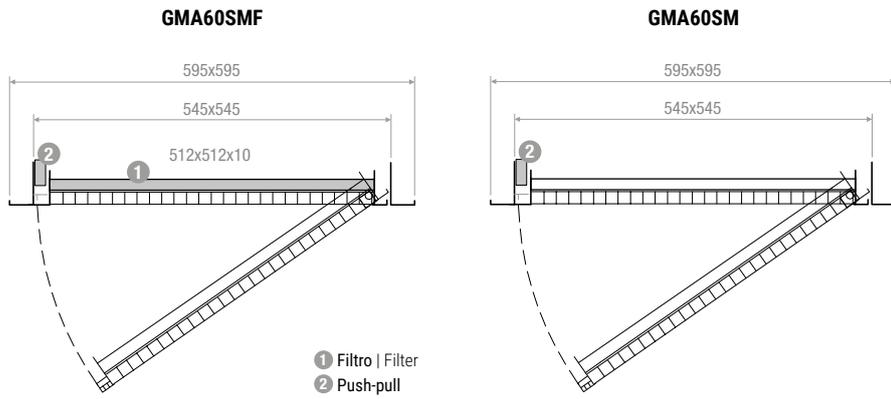

PLENUM | PLENUM

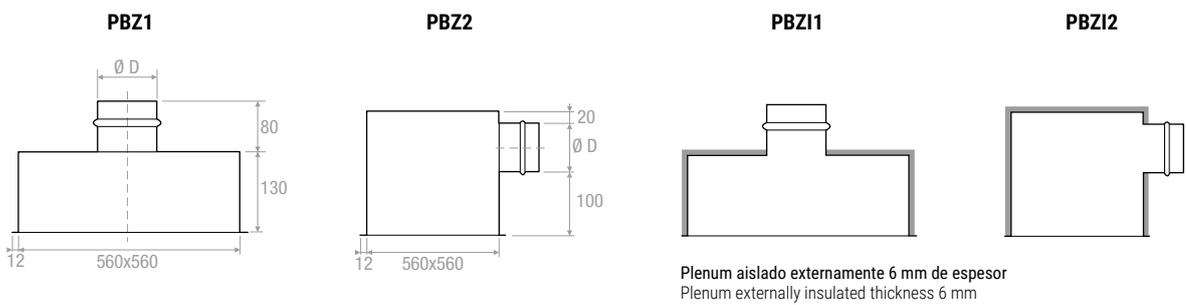

GMA60SMF

ESQUEMA DE ACCESO AL FILTRO | FILTER ACCESS SCHEME

GRI

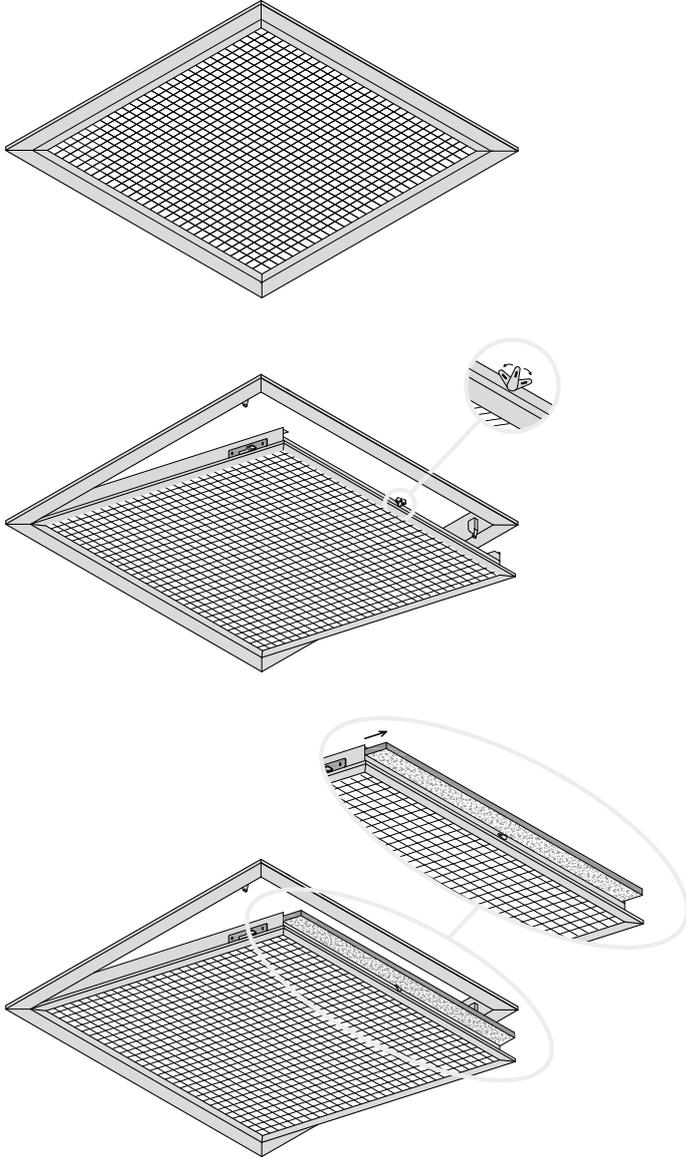



TABLA DE SELECCIÓN | SELECTION TABLE

Modelo Modell	A _v [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		mín	máx	mín	máx	mín	máx
GMA60SM	0,2639	3140	6190	33	53	5	20
GMA60SMF	0,2639	1090	2910	-	31	10	50

PRECIOS | PRICES

stock

								
BxH	GMA60SMF con filtro with filter	GMA60SM	Filtro Filter Ef. G2	SC	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€	€
595x595								