

GMAI60SMF

Características: rejillas de malla cuadrada 13x13 mm, inclinada 45° desmontable para falso techo dim. 595x595 externo del marco.

Construcción: aluminio.

Uso: en falso techo, en recuperación.

Fijación: con clips o bajo pedido con orificios para tornillos frontales.

Accesorios:

- Plenum de acero galvanizado con o sin aislamiento.
- Compuerta de calibración de acero galvanizado con aletas de movimiento contrario.

Characteristics: egg crate grilles 13x13 mm pitch, inclined of 45° with removable core, for false ceilings 595x595 overall size.

Finishing: aluminium.

Utilization: for false ceilings installation and for air intake.

Fixing: by using clips or holes for frontal screws on request.

Accessories:

- Galvanized steel plenum box with or without insulation.
- Calibration damper made of galvanized steel and fins with opposite movement.

MODELOS | MODELS

GMAI60SMF Rejilla de malla cuadrada 13x13 mm, inclinada 45°, desmontable, dimensión 595x595 mm externo marco, con filtro incluido | Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, with filter

GMA60SM Rejilla de malla cuadrada 13x13 mm, inclinada 45°, desmontable, dimensión 595x595 mm externo marco, sin filtro | Egg crate grille 13x13 mm pitch inclined 45° with removable core, 595x595 overall size, without filter


PINTURA | PAINTING

Acabado de aluminio no disponible. Disponible sólo pintado. De la lista de precios indicada anteriormente, aplique los aumentos RAL


Aluminium finishing unavailable. Available only the painted version. Apply the ral increase from gross prices

Colores RAL 9016 mate, RAL 9010 brillante: + 15% - Otros colores RAL: precios bajo pedido
Color RAL 9016 matt, RAL 9010 glossy: + 15% - Different RAL colors: prices on request

DIBUJOS | DRAWINGS

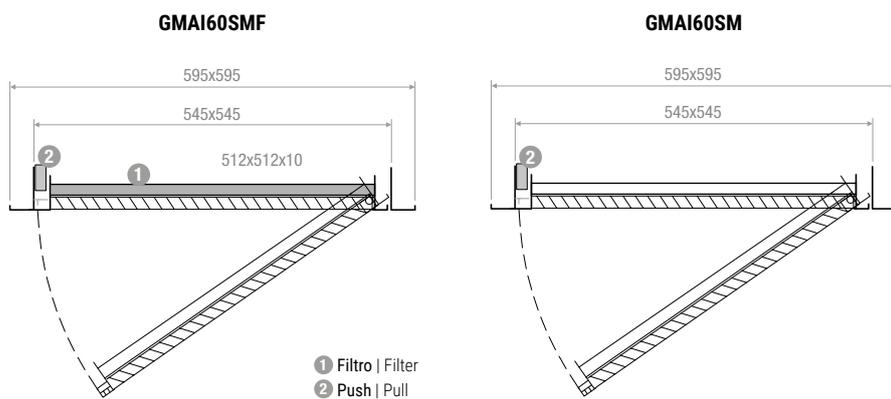

PLENUM | PLENUM

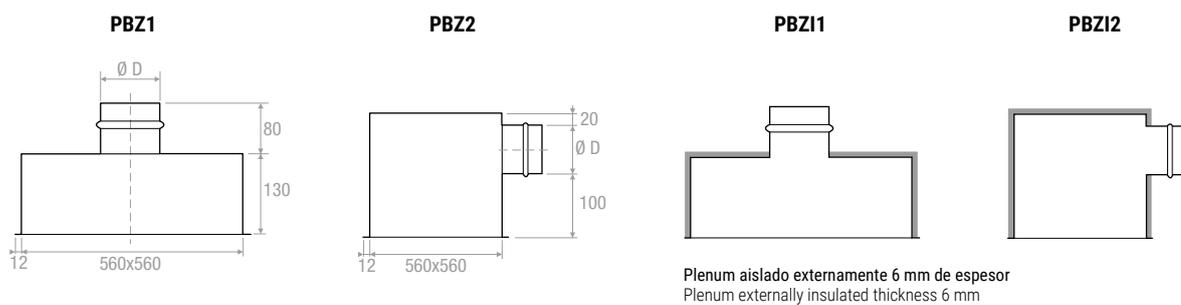

GMAI60SMF

ESQUEMA DE ACCESO AL FILTRO | FILTER ACCESS SCHEME

GRI

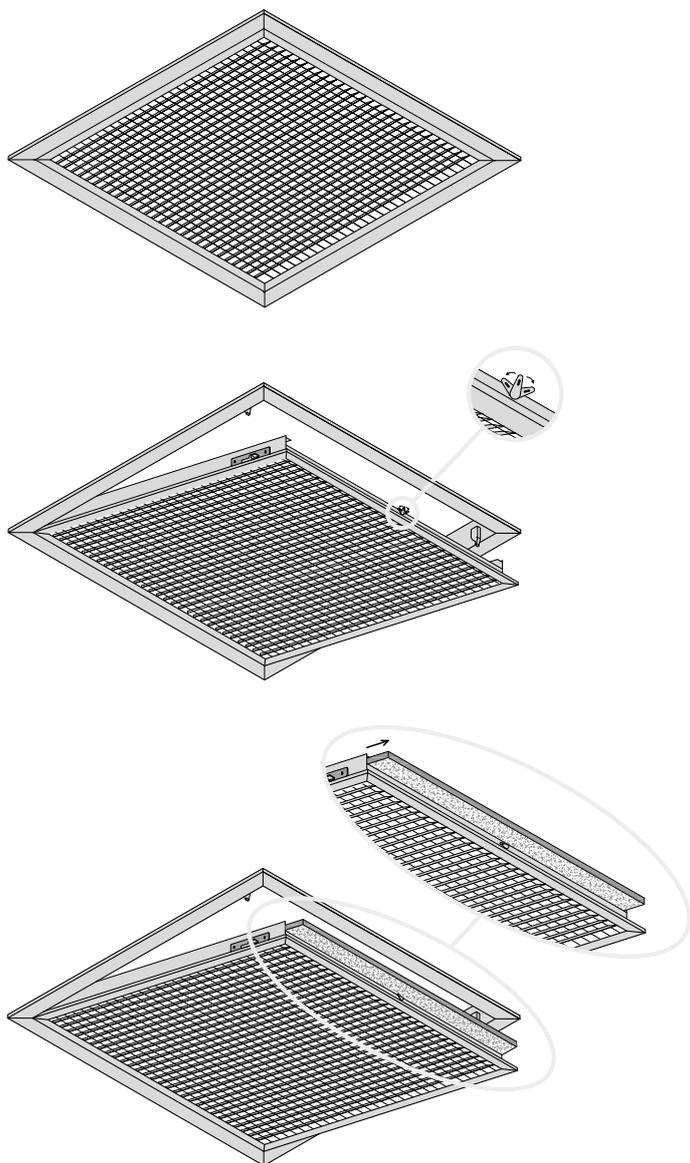





TABLA DE SELECCIÓN | SELECTION TABLE

Modelo Modell	A _v [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		mín	máx	mín	máx	mín	máx
GMAI60SM	0,2375	2640	5210	41	60	5	20
GMAI60SMF	0,2375	1070	2860	-	43	10	50

PRECIOS | PRICES

stock

								
BxH	GMAI60SMF con filtro with filter	GMAI60SM	Filtro Filter Ef. G2	SC	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€	€
595x595								