



GRA60SMF

Características: rejilla de recuperación portafiltro 595x595 mm con aletas fijas inclinadas 45° para el alojamiento y la sustitución del filtro.

Construcción: aluminio anodizado.

Uso: en pared/techo en recuperación.

Fijación: con clips (con tornillos bajo pedido obligatorio para instalación en techo).

Cierre: con push/pull.

Accesorios:

- Plenum de acero galvanizado con o sin aislamiento.
- Compuerta de calibración de acero galvanizado con aletas de movimiento contrario.
- Contramarco de montaje de chapa de acero galvanizado.

Characteristics: return filter grille 595x595 mm (bars inclined 45°). Removable core for filter insertion and replacement.

Finishing: anodized aluminium.

Utilization: for wall/ceiling installation and for air intake.

Fixing: by clips (with screws on request mandatory for ceiling installation).

Closing: by push/pull.

Accessories:

- Galvanized steel plenum box with or without insulation.
- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.

MODELOS | MODELS

GRA60SMF Rejilla de recuperación portafiltro 595x595 mm con aletas fijas de 45° con filtro incluido
Return filter grille 595x595 mm (bars inclined 45°) with filter


GRA60SM Rejilla de recuperación portafiltro con aletas fijas de 45° sin filtro
Return filter grille (bars inclined 45°) without filter

PINTURA | PAINTING

Colores RAL 9016 mate, RAL 9010 brillante: + 15% - Otros colores RAL: precios bajo pedido
Color RAL 9016 matt, RAL 9010 glossy: + 15% - Different RAL colors: prices on request



DIBUJOS | DRAWINGS

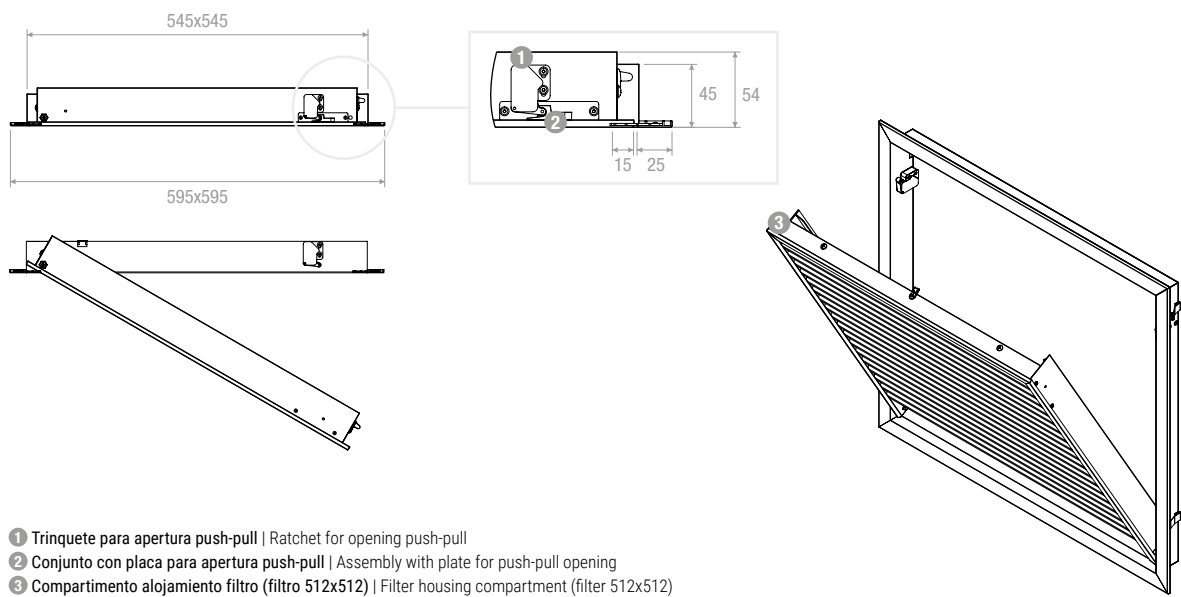

PLENUM | PLENUM

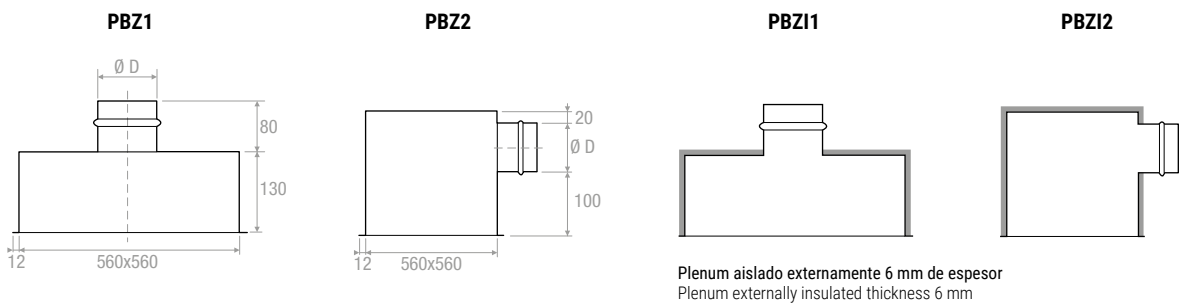


TABLA DE SELECCIÓN | SELECTION TABLE

Modelo Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		Dp_t [Pa]	
		mín	máx	mín	máx	mín	máx
GRA60SM	0,1957	910	2230	24	41	5	30
GRA60SMF	0,1957	510	1760	-	34	10	50

PRECIOS | PRICES

stock

Con filtro With filter								
BxH	GRA60SMF	GRA60SM	Filtro Filter Ef. G2	SCSM	PBZ1	PBZ11	PBZ2	PBZ12
mm	€	€	€	€	€	€	€	€
595x595								