



SPG

Características: rejillas antiarena para aspiración de aire en ambientes particularmente polvorientos.

Construcción: marco provisto en la parte inferior de orificios para la descarga del polvo y doble fila de aletas en C colocadas verticalmente en oposición. Construcción en chapa galvanizada, acero inoxidable, aluminio u otro material bajo pedido.

Uso: aspiración de aire y primera etapa de filtración gruesa aprovechando el principio de separación inercial. Temperatura máxima de funcionamiento 200 °C, presión operativa máxima 1000 pa.

Fijación: por medio de tornillos autoperforantes en el marco o bajo pedido con estribos de pared.

Characteristics: sand-proof grilles for air intake in dusty environments.

Finishing: frame provided at the bottom of holes for the discharge of the sand and two rows of C fins placed vertically in opposition. Construction in galvanized sheet metal, stainless steel, aluminium or other material on request.


Utilization: air intake and the first stage of coarse filtration using the principle of inertial separation. Maximum operating temperature 200 °C, operating pressure up to 1000 pa.

Performances: by means of self-tapping screws on the frame or on request with brackets to wall.

MODELOS | MODELS

SPGF	Con filtro plano de 23 mm de espesor y malla antipájaros Complete of flat filter thickness 23 mm and bird mesh
-------------	---

DIBUJOS | DRAWINGS

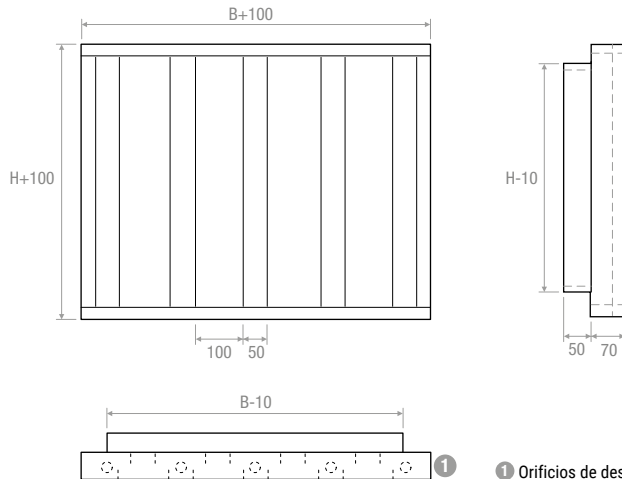


PÉRDIDA DE CARGA LADO AIRE | AIR PRESSURE DROP

SPG						
Velocidad frontal Front speed	[m/s]	0,5	1	1,5	2	2,5
Pérdidas de carga Pressure drop	[Pa]	9	32	67	114	172

SPGF						
Velocidad frontal Front speed	[m/s]	0,5	1	1,5	2	2,5
Pérdidas en aspiración Pressure drops in suction	[Pa]	65	97	146	218	327

DIAGRAMA DE SELECCIÓN | SELECTION DIAGRAM

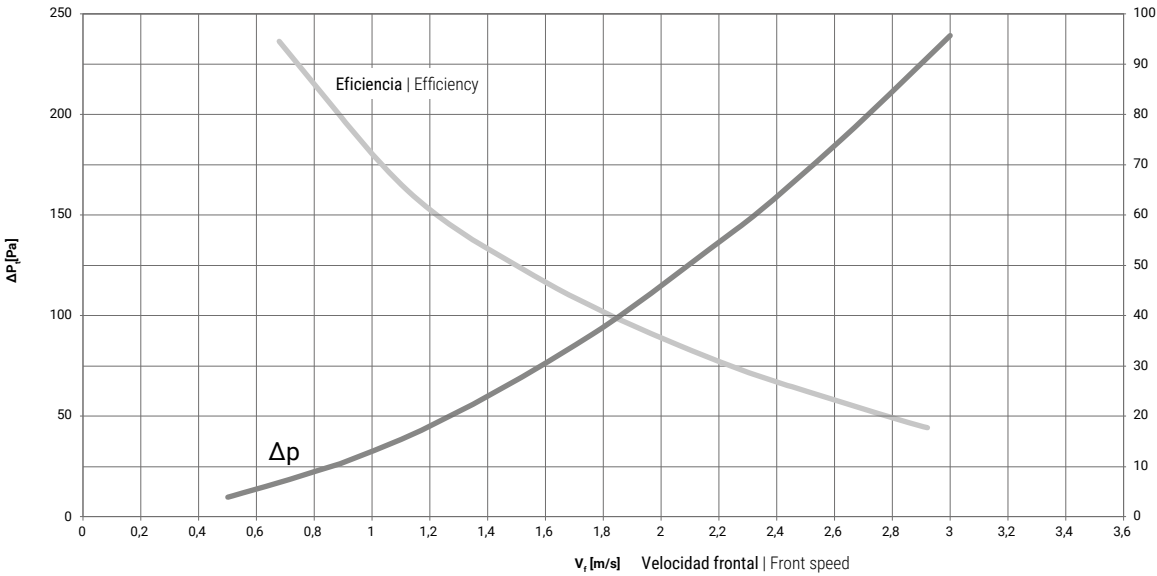

PRECIOS | PRICES

	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
300													
400													
500													
600													
700													
800													
900													
1000													
1100													
1200													
1300													
1400													
1500													
1600													
1700													
1800													
1900													
2000													