

SSA SSE



Características: Rejilla de sobrepresión/expulsión paso 50 mm de pared.

Construcción: marco y aletas de aluminio anodizado.

Uso: en pared, en recuperación o aspiración.

Fijación: con clips u orificios para tornillos frontales bajo pedido.

Accesorios:

- Compuerta de calibración de acero galvanizado con aletas de movimiento contrario.
- Contramarco de montaje de chapa de acero galvanizado.
- Malla antipájaros.

Characteristics: wall-mounted overpressure expulsion/aspiration grille 50 mm pitch.

Finishing: anodized aluminium frame and blades.

Utilization: for wall installation and for air intake or delivery.

Fixing: by using clips or holes for frontal screws on request.

Accessories:

- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.
- Bird screen.

MODELOS | MODELS

SSA Rejilla de aspiración (aletas paso 50 mm) | Intake grille (blades 50 mm pitch)

SSE Rejilla de expulsión (aletas paso 50 mm) | Outlet grille (blades 50 mm pitch)


ACCESORIOS | ACCESSORIES

CT Contramarco de fijación de chapa de acero galvanizado. Compuerta de sobrepresión con malla antipájaros.
Counterframes in galvanised steel sheet profile section. Overpressure damper with bird mesh.

PINTURA | PAINTING

Colores RAL 9016 mate, RAL 9010 brillante: + 50% - Otros colores RAL: precios bajo pedido
Color RAL 9016 matt, RAL 9010 glossy: + 50% - Different RAL colors: prices on request

DIBUJOS | DRAWINGS

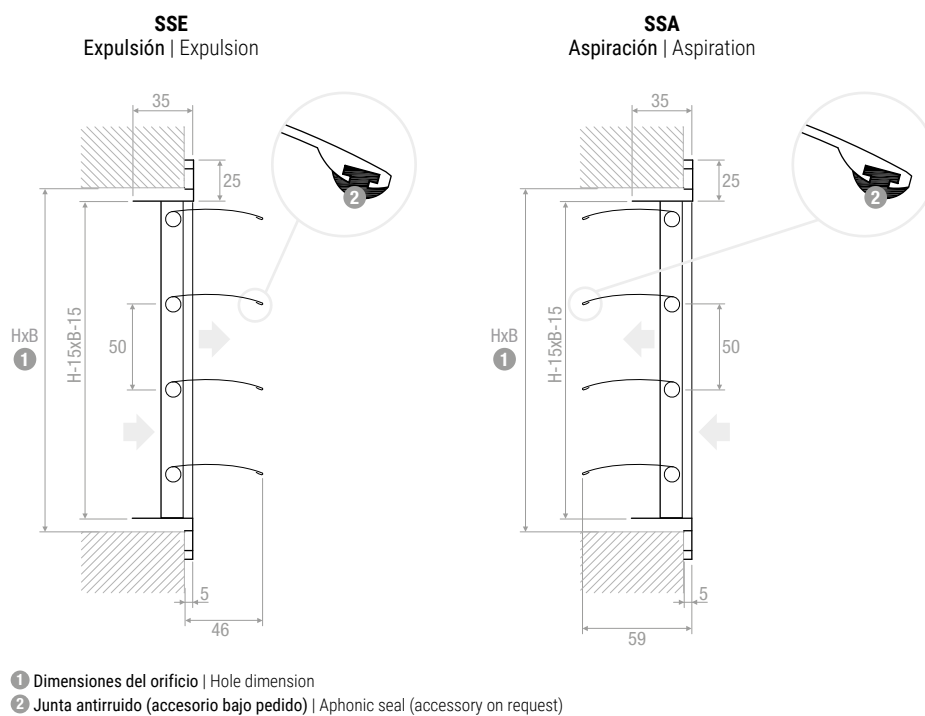

JUNTA ANTIRRUIDO | APHONIC SEAL



Topes de serie como en la foto | Series swabs as picture
 Junta continua antirruido precio + 15% | Aphonic continuous seal price + 15%

TABLA DE SELECCIÓN | SELECTION TABLE

Modelo Modell	A _x [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		mín	máx	mín	máx	mín	máx
SS 200x200	0,0363	50	300	-	29	5	20
SS 400x200	0,0727	100	590	-	31	5	20
SS 600x200	0,1091	150	890	-	32	5	20
SS 800x200	0,1454	200	1180	-	33	5	20
SS 1000x200	0,1818	250	1480	-	33	5	20
SS 200x400	0,0727	100	590	-	31	5	20
SS 400x400	0,1454	200	1180	-	33	5	20
SS 600x400	0,2182	300	1780	-	34	5	20
SS 800x400	0,2909	400	2370	-	34	5	20
SS 1000x400	0,3636	490	2960	-	35	5	20
SS 200x600	0,1091	150	890	-	32	5	20
SS 400x600	0,2182	300	1780	-	34	5	20
SS 600x600	0,3273	450	2660	-	35	5	20
SS 800x600	0,4364	590	3550	-	35	5	20
SS 1000x600	0,5455	740	4440	-	36	5	20
SS 200x800	0,1454	200	1180	-	33	5	20
SS 400x800	0,2909	400	2370	-	34	5	20
SS 600x800	0,4364	590	3550	-	35	5	20
SS 800x800	0,5818	790	4740	-	36	5	20
SS 1000x800	0,7273	990	5920	-	37	5	20
SS 200x1000	0,1818	250	1480	-	33	5	20
SS 400x1000	0,3636	490	2960	-	35	5	20
SS 600x1000	0,5455	740	4440	-	36	5	20
SS 800x1000	0,7273	990	5920	-	37	5	20
SS 1000x1000	0,9091	1240	7400	-	37	5	20

PRECIOS | PRICES

Dimensión Dimension B mm								
H	200	300	400	500	600	700	800	1000
mm	€	€	€	€	€	€	€	€
200								
300								
400								
500								
600								
800								
1000								

Bajo pedido, malla antipájaros: +25% | On request Overpressure damper with bird mesh: + 25%

