

SSIA SSIE



Características: Rejilla de sobrepresión/expulsión paso 100 mm de pared.

Construcción: marco y aletas de aluminio anodizado.

Uso: en pared, en recuperación o aspiración.

Fijación: con clips u orificios para tornillos frontales bajo pedido.

Accesorios:

- Compuerta de calibración de acero galvanizado con aletas de movimiento contrario.
- Contramarco de montaje de chapa de acero galvanizado.
- Malla antipájaros.

Characteristics: wall-mounted overpressure expulsion/aspiration grille 100 mm pitch.

Finishing: anodized aluminium frame and blades.

Utilization: for wall installation and for air intake or delivery.

Fixing: by using clips or holes for frontal screws on request.

Accessories:

- Calibration damper made of galvanized steel and fins with opposite movement.
- Mounting counterframes made of galvanized steel sheet.
- Bird screen.

MODELOS | MODELS

SSIA	Compuerta de aspiración (aletas paso 100 mm) Intake damper (blades 100 mm pitch)
SSIE	Compuerta de expulsión (aletas paso 100 mm) Outlet damper (blades 100 mm pitch)


ACCESORIOS | ACCESSORIES

CTP	Contramarco de fijación de chapa de acero galvanizado. Compuerta de sobrepresión con malla antipájaros. Counterframes in galvanised steel sheet profile section. Overpressure damper with bird mesh.
------------	---

PINTURA | PAINTING

Colores RAL 9016 mate, RAL 9010 brillante: + 50% - Otros colores RAL: precios bajo pedido
Color RAL 9016 matt, RAL 9010 glossy: + 50% - Different RAL colors: prices on request

DIBUJOS | DRAWINGS

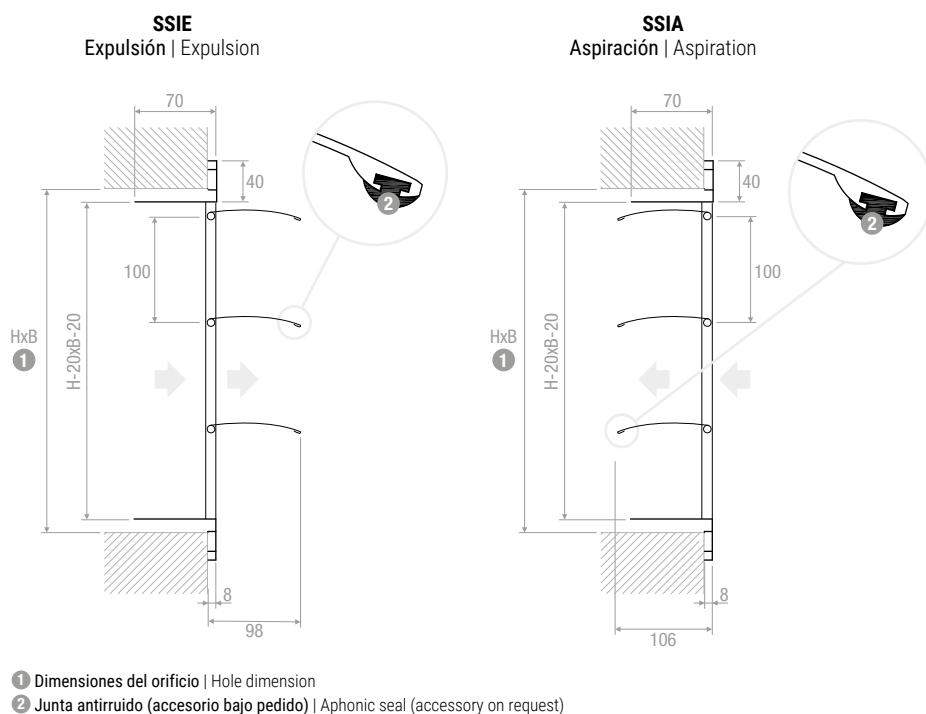

JUNTA ANTIRRUIDO | APHONIC SEAL



Topes de serie como en la foto | Series swabs as picture
 Junta continua antirruído precio + 15% | Aphonic continuous seal price + 15%

TABLA DE SELECCIÓN | SELECTION TABLE

GRI

Modelo Modell	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		mín	máx	mín	máx	mín	máx
SSI 200x200	0,0364	50	260	-	28	5	20
SSI 400x200	0,0727	100	510	-	29	5	20
SSI 600x200	0,1091	150	770	-	30	5	20
SSI 800x200	0,1455	210	1030	-	31	5	20
SSI 1000x200	0,1818	260	1280	-	32	5	20
SSI 200x400	0,0727	100	510	-	29	5	20
SSI 400x400	0,1455	210	1030	-	31	5	20
SSI 600x400	0,2182	310	1540	-	32	5	20
SSI 800x400	0,2909	410	2060	-	33	5	20
SSI 1000x400	0,3636	520	2570	-	33	5	20
SSI 200x600	0,1091	150	770	-	30	5	20
SSI 400x600	0,2182	310	1540	-	32	5	20
SSI 600x600	0,3273	460	2310	-	33	5	20
SSI 800x600	0,4364	620	3080	-	34	5	20
SSI 1000x600	0,5455	770	3850	-	34	5	20
SSI 200x800	0,1455	210	1030	-	31	5	20
SSI 400x800	0,2909	410	2060	-	33	5	20
SSI 600x800	0,4364	620	3080	-	34	5	20
SSI 800x800	0,5818	830	4110	-	35	5	20
SSI 1000x800	0,7273	1030	5140	-	35	5	20
SSI 200x1000	0,1818	260	1280	-	32	5	20
SSI 400x1000	0,3636	520	2570	-	33	5	20
SSI 600x1000	0,5455	770	3850	-	34	5	20
SSI 800x1000	0,7273	1030	5140	-	35	5	20
SSI 1000x1000	0,9091	1290	6420	-	36	5	20

PRECIOS | PRICES

Dimensión Dimension B mm								
H	200	300	400	500	600	700	800	1000
mm	€	€	€	€	€	€	€	€
200								
300								
400								
500								
600								
800								
1000								

Bajo pedido, malla antipájaros: +25% | On request Overpressure damper with bird mesh: + 25%