


BQE3

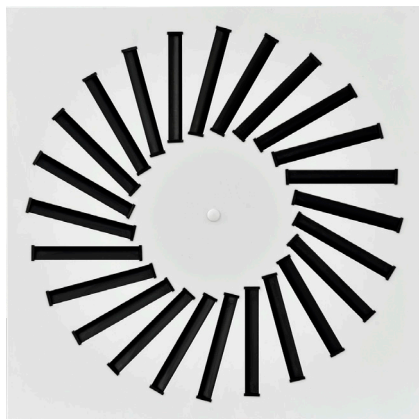

Caractéristiques : diffuseurs à jet hélicoïdal avec déflecteurs réglables.

Construction : acier peint en blanc RAL 9016 mat, déflecteurs en polypropylène noir RAL 9005.

Utilisation au plafond, en soufflage et en reprise (sans déflecteurs). Hauteur d'installation : 2,5-4,1 m.

Fixation : avec des vis latérales ou à l'aide d'une vis centrale sur le pont de montage.

Accessoires :

Plénum en acier galvanisé :

- Avec ou sans isolation.
- Avec ou sans équilibreur.
- Avec ou sans registre de réglage.
- Avec ou sans pont de fixation.

Characteristics: swirl diffusers with adjustable throws.

Finishing: RAL 9016 white matt painted steel, deflection blades are made of polypropylene RAL 9005 black.

Utilization: for ceiling installation. For return air (without deflectors) or supply air. Installation height: 2,5-4,1 m.

Fixing: by using lateral screws or central screw on mounting bridge.

Accessories:


Galvanized steel plenum:

- With or without insulation.
- With or without air equalizer.
- With or without damper.
- With or without mounting bridge.


DESSINS | DRAWINGS

BQE3Q


8 Fentes | Slots




16 Fentes | Slots




24 Fentes | Slots




24 Fentes | Slots




48 Fentes | Slots



54 Fentes | Slots



72 Fentes | Slots

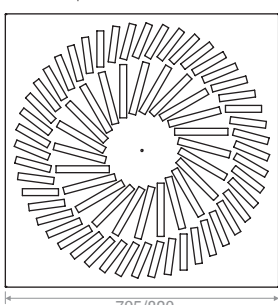


BQE3R


8 Fentes | Slots




16 Fentes | Slots




24 Fentes | Slots




24 Fentes | Slots




48 Fentes | Slots



54 Fentes | Slots




72 Fentes | Slots

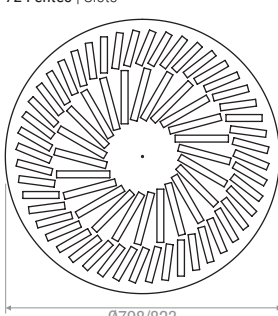


BQE3QR VERSION SUR PANNEAU | PANEL VERSION


8 Fentes | Slots



16 Fentes | Slots



24 Fentes | Slots



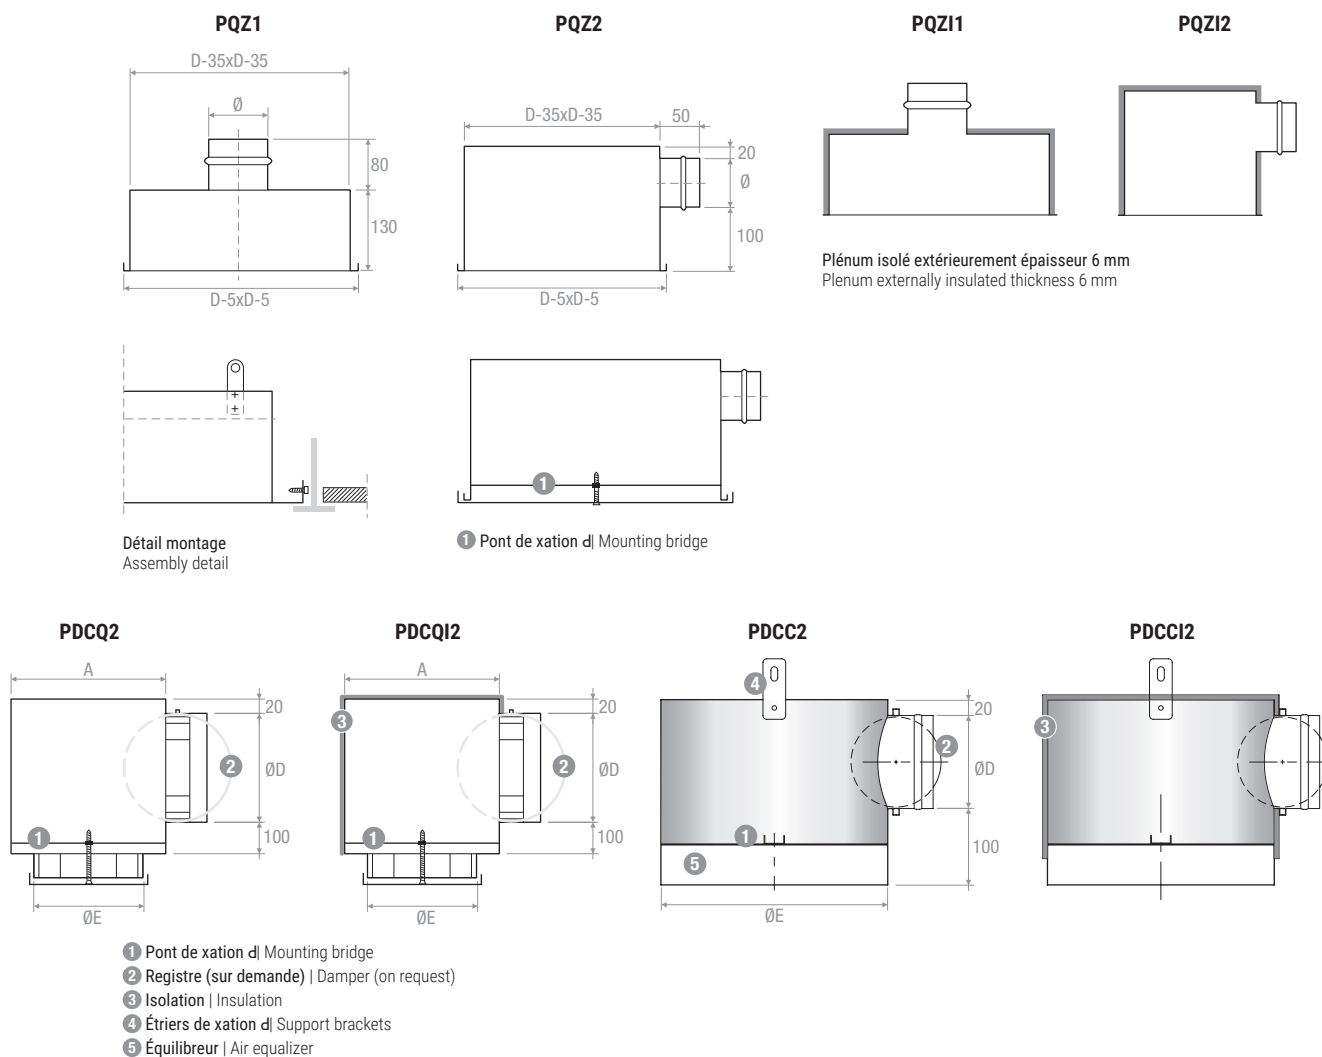





TABLEAU DE SÉLECTION | TECHNICAL DATA

Modèle Model	A_x [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_i [Pa]	
		min	max	min	max	min	max	min	max
BQE3QR 300x8	0,0095	150	300	32	54	1,8	3,5	10	50
BQE3QR 400x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 500x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 600x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 625x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 500x24	0,0284	370	720	28	45	2,5	4,9	10	50
BQE3QR 600x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR 625x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR 600x48	0,0568	640	1260	26	41	3,1	6,1	10	50
BQE3QR 625x54	0,0639	710	1380	25	40	3,2	6,3	10	50
BQE3QR 800x72	0,1017	1030	2010	24	37	3,7	7,2	10	50
BQE3QR 825x72	0,1017	1030	2010	24	37	3,7	7,2	10	50

				
	Ø D	D	BQE3Q	BQE3R
mm	mm	mm	€	€
300x8	298	295x295		
400x16	398	395x395		
500x16	498	495x495		
600x8	598	595x595		
600x16	598	595x595		
625x16	623	620x620		
500x24	498	495x495		
600x24	598	595x595		
625x24	623	620x620		
600x48	598	595x595		
625x54	623	620x620		
800x72	798	795x795		
825x72	823	820x820		



PLENUM BQE3Q

								
AxB	Raccord Spigot	PQZ1	PQZ11	PQZ2	PQZ12	Registre Damper	Équilibreur Equalizer	Pont de fixation Mounting bridge
mm	Ø mm	€	€	€	€	€	€	€
300	123							
400	148							
500	198							
600	248							
625	298							
800	348							
825	348							

PLENUM BQE3R

								
Ø	Plénum galvanisé Galvanized plenum			PDCQ2	PDCQ12	Registre Damper	Équilibreur Equalizer	Pont de fixation Mounting bridge
	A	Ø D	Ø E	€	€	€	€	€
mm	mm	mm	mm					
298	400	123	300					
398	500	148	390					
498	600	198	490					
598	700	248	590					
623	700	298	615					
798	900	348	790					

PLENUM BQE3R

							
Ø	Plénum galvanisé Galvanized plenum		PDCC2	PDCC12	Registre Damper	Équilibreur Equalizer	Pont de fixation Mounting bridge
	Ø D	Ø E					
mm	mm	mm	€	€	€	€	€
298	123	300					
398	148	390					
498	198	490					
598	248	590					
623	298	615					
798	348	790					