



CFCRC

Caractéristiques : diffuseurs circulaires à cônes fixes avec corps central amovible et registre papillon.

Construction : aluminium peint en blanc RAL 9016 mat et joint d'étanchéité.

Utilisation : au plafond, en soufflage ou en reprise. Hauteur d'installation : 2,6-4,1 m

Fixation : à vis cachées placées sur le col du diffuseur ou avec pont de montage.

Accessoires :

- Collier de fixation (CF).
- Panneau 595x595 (CFP).

Characteristics: circular diffusers with fixed cones and removable core and butterfly damper.

Finishing: aluminium painted in matt white RAL 9016, with sealing gasket.


Utilization: for ceiling installation, for return or supply air application. Installation height: 2,6-4,1 m.

Fixing: by concealed fixing screws mounted on the diffuser neck or with mounting bridge.

Accessories:

- Fixing ring (CF).
- Panel 595x595 (CFP).

DESSINS | DRAWINGS

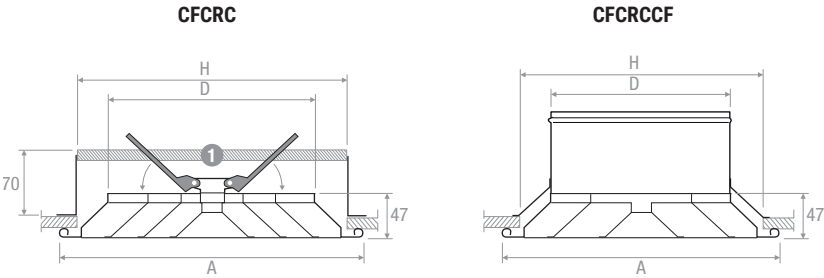

1 Pont de fixation | Mounting bridge

Dimensions Dimension	H	D	A
mm	mm	mm	mm
150	220	148	257
200	276	198	309
250	324	249	362
300	377	298	415
350	411	348	460

ACCESSOIRES | ACCESSORIES

Collier de xation d| Fixing ring


CF



Polycarbonate
Polycarbonate
Ø 150
Ø 200
Ø 250

Acier
Steel
Ø 300
Ø 350

MONTAGE | MOUNTING

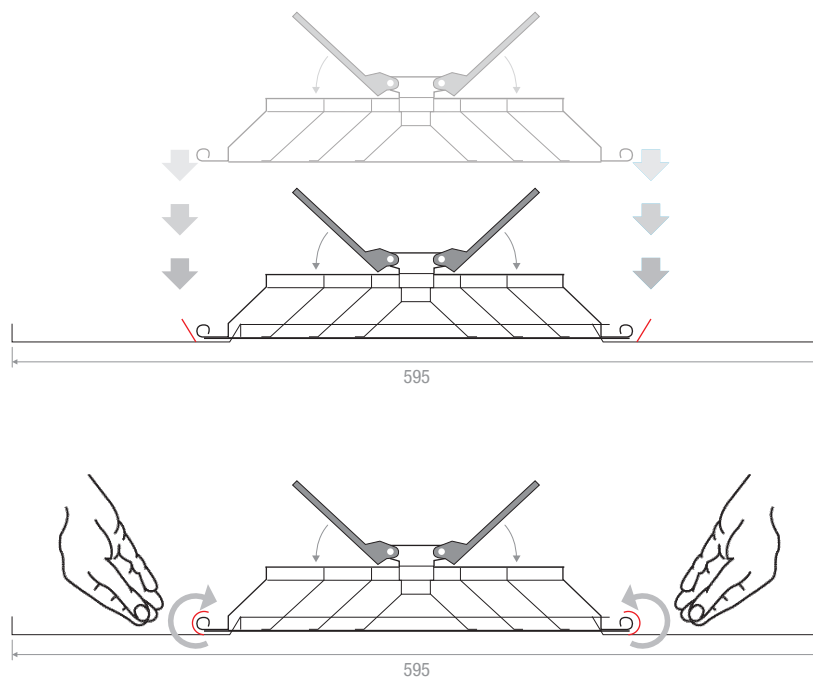

CFCRC+CFP VERSION SUR PANNEAU | PANEL VERSION





TABLEAU DE SÉLECTION | TECHNICAL DATA

Modèle Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)} - Y_{(0,25)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
CFCRC 150	0,0102	90	220	-	38	1,0	2,1	10	50
CFCRC 200	0,0227	200	490	-	38	1,5	3,2	10	50
CFCRC 250	0,0366	330	790	-	39	1,9	4,2	10	50
CFCRC 300	0,0519	470	1120	-	39	2,2	5,1	10	50
CFCRC 350	0,0684	620	1470	-	40	2,6	6,0	10	50

PRIX | PRICES

stock

							
Ø	CFCRC	Boîte	CF Coll. de x. d Fixing ring	CFP	Boîte		
mm	€	Pièces Pieces	€	€	Pièces Pieces		
150		4			10		
200		4			10		
250		4			10		
300		4			-		
350		4			-		

Le pont de xation est inclus dans le prix d| Mounting bridge is included in the price