

DU



Caractéristiques : diffuseurs à buse à longue portée orientables avec un angle maximale de 30°.

Construction : aluminium satiné naturel avec apprêt transparent.

Utilisation : au plafond ou au mur, en soufflage. Hauteur d'installation : 2,4-11,5 m.

Fixation : par l'intermédiaire de vis avant sur le collier du diffuseur au conduit ou au raccord pour conduit circulaire.

Accessoires :

- Cache vis (CV).
- Raccord pour gaine exible (RF).
- Raccord pour conduit circulaire (RC).

Characteristics: jet diffusers for long throw with orientable nozzle for a maximum angle of 30°.

Finishing: naturale satinized aluminium with transparent primer.


Utilization: for ceiling or wall installation and for air delivery. Installation height: 2,4-11,5 m.

Fixing: xing by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.


Accessories:

- Cover screws (CV).
- Flexible hose connection (RF).
- Circular duct connection (RC).


DU 40




DU 50




DU 80

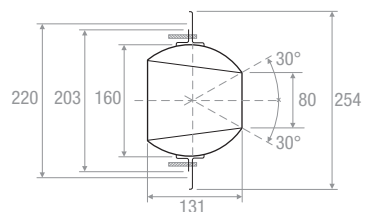


DU 110

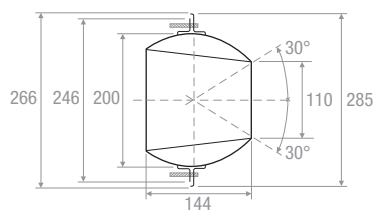


DU 150

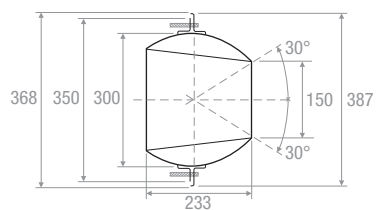


DU 200

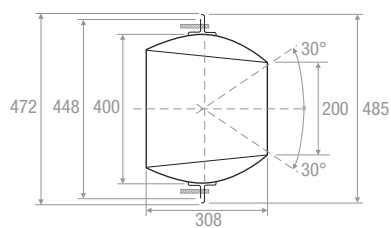

DU 230

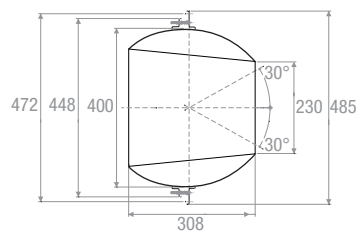


DUSC 230

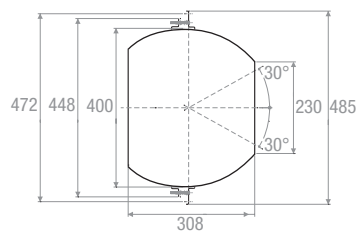


MONTAGE | MOUNTING


Montage sur conduit
Mounting on the duct




Montage sur conduit circulaire
Mounting on the circular duct



Montage avec gaine flexible Mounting by flexible duct




Montage en série
Mounting on panel



1 Ø conduit | Ø duct

Montage sur conduit et sur mur | Mounting on duct and at wall

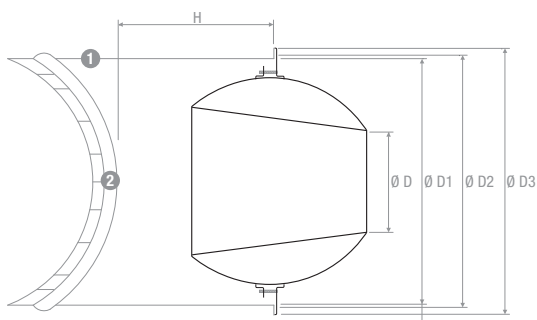


1 Raccord pour conduit circulaire | Connection for circular duct

2 Ø conduit | Ø duct

Modèle Model	Trous sur 360° Holes on 360° N°	D2	D	D1	D3	H	Ø Conduit Ø Duct
		mm	mm	mm	mm	mm	mm
RCDU 40	3F Ø4,2	119	40	109	129	150	160-450
RCDU 50	3F Ø4,2	148	50	138	158	150	200-500
RCDU 80	3F Ø5	220	80	210	230	200	315-630
RCDU 110	3F Ø5	266	110	256	282	300	315-800
RCDU 150	6F Ø5	368	150	358	378	300	500-800
RCDU 200	6F Ø5	472	200	460	480	350	500-1000
RCDU 230	6F Ø5	472	230	460	480	350	500-1000

Montage avec gaine flexible | Mounting with flexible duct



1 Connexion au conduit flexible | Connection to flexible hose

2 Connexion au diffuseur à buse | Connection to nozzle diffuser


Modèle Model	ØA	ØB	C	D	E	ØF int	L
	mm	mm	mm	mm	mm	mm	mm
RFDU 40	78	130	40	40	40	110	120
RFDU 50	98	160	60	40	60	135	160
RFDU 80	158	235	60	100	60	205	220
RFDU 110	198	280	60	100	60	250	220
RFDU 150	313	380	60	170	60	350	290
RFDU 200	398	480	60	170	60	450	290
RFDU 230	398	480	60	170	60	450	290

TABLEAU DE SÉLECTION | TECHNICAL DATA

Modèle Model	A_k [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)} - Y_{(0,25)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
DU 40	0,0012	20	45	20	38	5	12,5	10	70
DU 50	0,0019	30	70	20	39	4,7	11	10	70
DU 80	0,005	80	200	20	40	7,2	18	10	70
DU 110	0,0095	135	370	26	51	7,5	21	10	70
DU 150	0,0176	250	720	31	58	8,5	23	10	70
DU 200	0,0314	480	1320	38	69	9,8	26	10	70
DU 230	0,0415	670	1750	40	69	11,3	28	10	70
DUSC 230*	0,0415	750	1400	38	69	15	27	10	70

PRIX | PRICES

stock

		
Ø	DU	CV
mm	€	€
DU 40		
DU 50		
DU 80		
DU 110		
DU 150		
DU 200		
DU 230		
DUSC 230*		

* DUSC 230 sans cône central | DUSC 230 without central cone

RACCORD DU TUBE GALVANISÉ MODÈLE RCDU | GALVANIZED DUCT FITTING MODEL RCDU

DU	Raccord tube galvanisé
Ø mm	Ø mm €
40	160
40	200
40	250
40	315
40	355
40	400
40	450
50	200
50	250
50	315
50	355
50	400
50	450
50	500
80	315
80	355
80	400
80	450
80	500
80	560
80	630
110	315
110	355
110	400
110	450
110	500
110	560
110	630
110	710
110	800
150	500
150	560
150	630
150	710
150	800
200	500
200	560
200	630
200	710
200	800
200	900
200	1000



RACCORD DE GAINÉ FLEX MODÈLE RFDU | FLEXIBLE HOSE FITTING MODEL RFDU

DU	Gaine flex Flex tube	
Ø mm	Ø mm	€
40	80	
50	100	
80	160	
110	200	
150	250	
150	315	
200	400	