

CARATTERISTICHE TECNICHE - TECHNICAL CHARACTERISTICS

Modello - Model	10	12	15
V	230	230	230
W	15	20	25
R.P.M.	2500	2450	2100
m³/h	98	190	320
m.m.H₂O	3	5	8
Ø mm	100	120	150
dB (A)	38	40	42


PREZZI - PRICES

€			

PREZZI VERSIONE S-STANDARD
PRICES VERSION S-STANDARD


ACCESSORI - ACCESSORIES

Griglie Grills




PREZZI A RICHIESTA - PRICES ON REQUEST

DIMENSIONI - DIMENSIONS

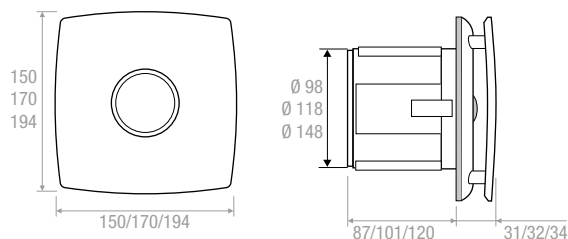

DATI PRESTAZIONALI - PERFORMANCE DATA

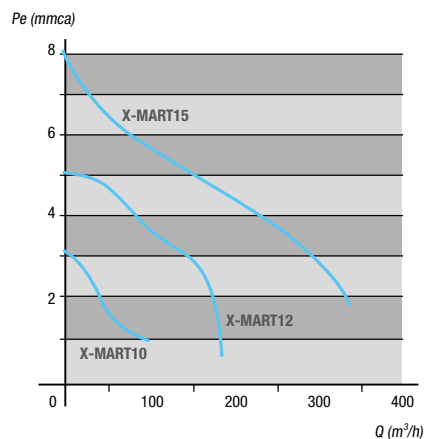

CARATTERISTICHE:

SERIE ESCLUSIVA CON FRONTALINO INOSSIDABILE. Frontale estraibile senza usare viti per una maggiore pulizia. Sistema esclusivo di montaggio rapido senza viti, RAL 9010. Totalmente aerodinamico con maggior flusso d'aria. Luce pilota di funzionamento. Ultra silenzioso.

VERSIONI:

- S-STANDARD funziona con l'interruttore della luce.
- T-TIMER timer elettronico regolabile (prezzi a richiesta).
- H-HYGRO con rilevatore di umidità (prezzi a richiesta).

CHARACTERISTICS:

EXCLUSIVE SERIES WITH STAINLESS FRONT PANEL. Front panel can be removed without the use of screws for easier cleaning, RAL 9010. Exclusive, screw-free, fast assembly system. Totally aerodynamic with improved airflow. Functioning pilot light. Ultra silent.

VERSION:

- S-STANDARD functions with the light switch.
- "T-TIMER" adjustable electronic timer (price on request).
- H-HYGRO with humidity detector (price on request).

