

ACP

**CARATTERISTICHE:**

Raccordo ad innesto rapido per tubo flessibile.

MATERIALE:

ABS bianco ad alta resistenza.

IMPIEGO:

Adatto per installazione su plenum il cui spessore complessivo non superi i 20 mm.

FISSAGGIO:

Installazione rapida delle due parti formanti il raccordo con speciale sistema a ghiera.

ACCESSORI:

Serranda equalizzatrice a 3 posizioni.

CHARACTERISTICS:

Quick installation spigot for flexible hose.

MATERIAL:

High strength white ABS.

OPERATION:

Suitable for installation on plenums whose total thickness does not exceed 20 mm.

FIXING:

Quick installation of the two parts forming the spigot with a special ring system.

ACCESSORIES:

3 position equalizer damper.

PREZZI - PRICES

STOCK




Modello - Model	
mm	€
ACP160	
ACP200	
ACP250	
ACPPD160	
ACPPD200	
ACPPD250	

MODELLI - MODELS:

ACP: Raccordo innesto rapido - Quick installation spigot

ACPPD: Serranda equalizzatrice (accessorio) - Equalizer damper (accessory)

DISEGNI - DRAWINGS

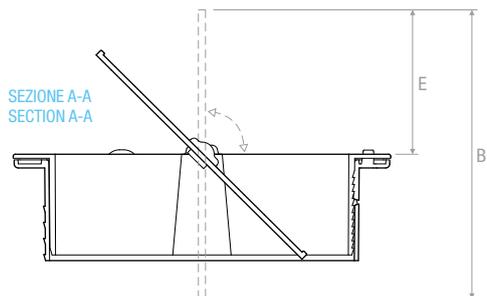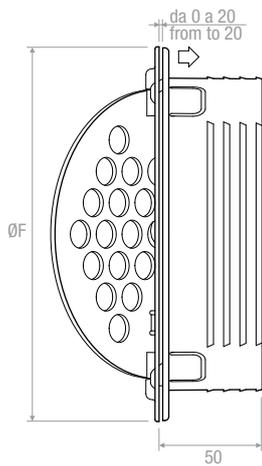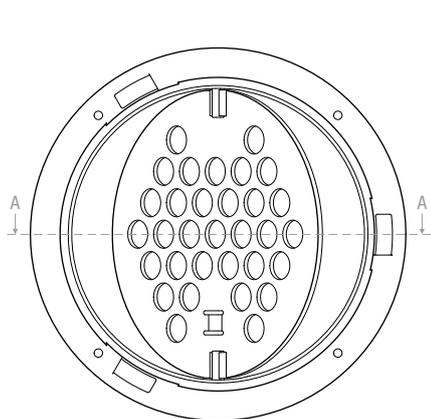

	ACP		
	160	200	250
B	143	183	233
D	156	196	246
E	71,5	91,5	116,5
F	196	226	276

