

BQFC60






PREZZI - PRICES

RIPRESA - RETURN

■ STOCK

BxH	BQFC60R	SC	PDZ1	PDZ2
mm	€	€	€	€
595x595 esterno cornice - overall size				

DISEGNI - DRAWINGS

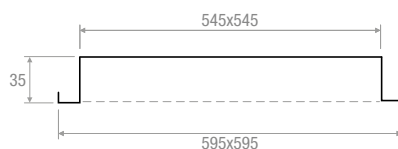

CARATTERISTICHE:

Diffusori quadri forellinati con cornice.

COSTRUZIONE:

Telaio in alluminio, lamiera forata in acciaio verniciato bianco RAL 9010.

IMPIEGO:

A soffitto, in mandata e ripresa.
Altezza di installazione:
2,5-4,0 m

FISSAGGIO:

Clips (viti a richiesta).

ACCESSORI:

- Plenum in acciaio zincato standard o isolato, con o senza rete equalizzatrice.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.

CHARACTERISTICS:

Perforated panel diffusers with frame.

CONSTRUCTION:

Frame in aluminium, perforated sheet steel painted white RAL 9010.

UTILIZATION:

For ceiling installation and for air intake and delivery.
Installation height: 2,5-4,0 m

FIXING:

Clips (frontal screws on request).

ACCESSORIES:


- Galvanized steel plenum, standard or insulated, with or without equalizer sheet.
- Calibration damper made of galvanized steel and fins with opposite movement.

BQFC60R: Ripresa / no deflettori - Return / no deflectors

BQFC60MS: Mandata / deflettori / attacco superiore - Supply / deflectors / top spigot

BQFC60ML: Mandata / deflettori / attacco laterale - Supply / deflectors / side spigot

DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

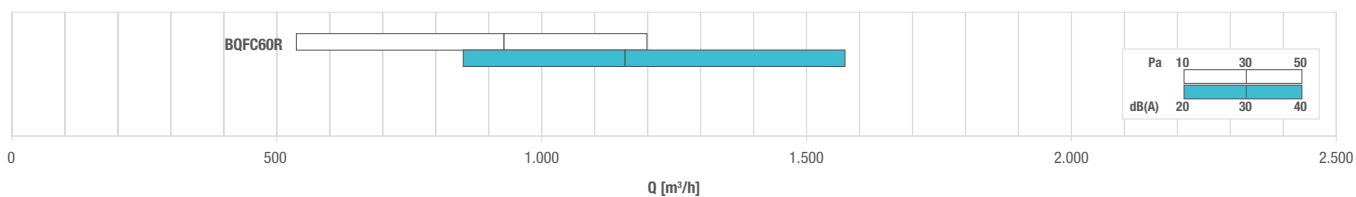

RIPRESA - RETURN

TABELLA DI SELEZIONE RIPRESA - SELECTION TABLE RETURN

Modello - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQFC60R	0,1398	540	1200	< 20	31	-	-	10	50

PREZZI - PRICES

MANDATA - SUPPLY

	BQFC60M	Ø B	SC	PDZ1	PDZ1
	€	mm	€	€	€
BQFC60MS 160		158			
BQFC60MS 200		198			
BQFC60MS 250		248			
BQFC60MS315		313			
	BQFC60M	Ø B	SC	PDZ2	PDZ2
BQFC60ML 160		158			
BQFC60ML 200		198			
BQFC60ML 250		248			
BQFC60ML 315		313			

DISEGNI - DRAWINGS

Configurazioni flussi aria
Air flow configuration

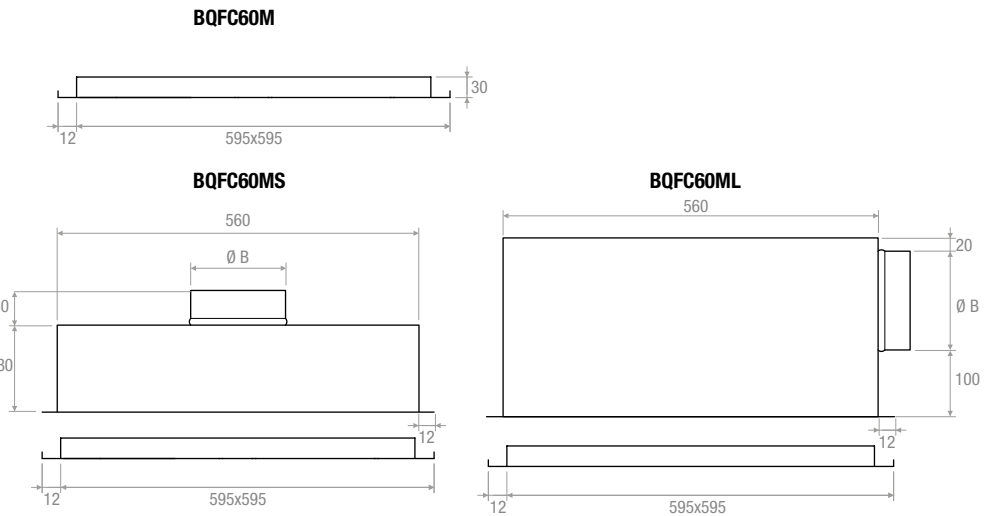



DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

MANDATA - SUPPLY

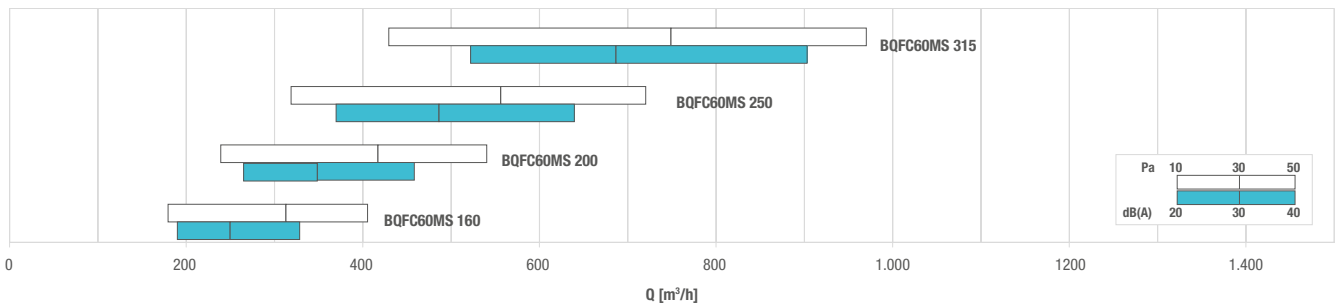
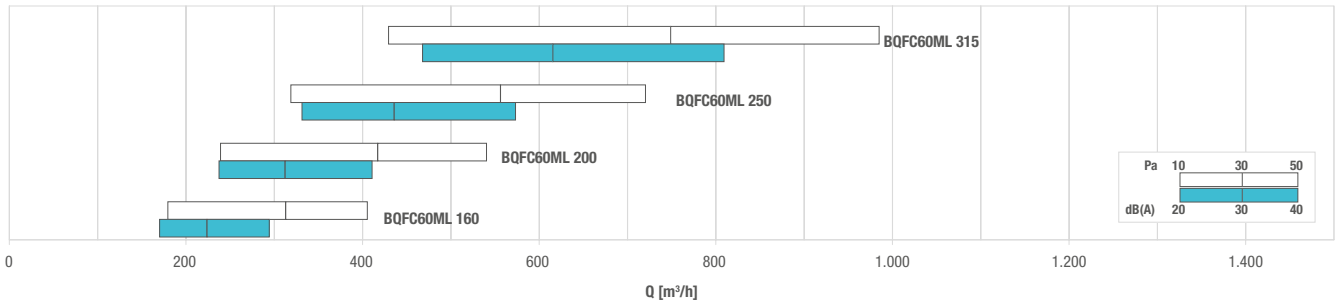


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	Q [m³/h]		L _{wa} [dB(A)]		X _{0,20} [m]		D _p [Pa]	
	min	max	min	max	min	max	min	max
BQFC60MS 160	180	410	-	48	1,1	3,4	10	50
BQFC60MS 200	240	540	-	46	1,6	5,1	10	50
BQFC60MS 250	320	720	-	44	2,4	7,7	10	50
BQFC60MS 315	430	970	-	43	3,7	11,8	10	50

Modello - Model	Q [m³/h]		L _{wa} [dB(A)]		X _{0,20} [m]		D _p [Pa]	
	min	max	min	max	min	max	min	max
BQFC60ML 160	180	410	--	52	1,1	3,4	10	50
BQFC60ML 200	240	540	--	50	1,6	5,1	10	50
BQFC60ML 250	320	720	--	48	2,4	7,7	10	50
BQFC60ML 315	430	970	--	47	3,7	11,8	10	50