



CARATTERISTICHE:

Diffusori a ugello a lunga gittata orientabili con un angolo massimo di 30°.

COSTRUZIONE:

Alluminio satinato naturale con primer trasparente.

IMPIEGO:

A soffitto o a parete, in mandata. Altezza di installazione: 2,4-11,5 m.

FISSAGGIO:

Fissaggio mediante viti frontali sul collare del diffusore al canale o al raccordo per canale circolare.

ACCESSORI:

Raccordo per canale circolare. CV: copri vite.

CHARACTERISTICS:

Jet diffusers for long throw with orientable nozzle for a maximum angle of 30°.

CONSTRUCTION:

Nature satinized aluminium with transparent primer.

UTILIZATION:

For ceiling or wall installation and for air delivery. Installation height: 2,4-11,5 m.

FIXING:

Fixing by frontal screws mounted on the diffuser ring to the duct or to the connector on circular duct.

ACCESSORIES:


Connector for circular duct. CV: cover screws.

PREZZI - PRICES

STOCK


	DU	CV	PEZZI - PIECES
mm	€	€	
DU 80			120
DU 150			28
DU 200			16

DISEGNI - DRAWINGS

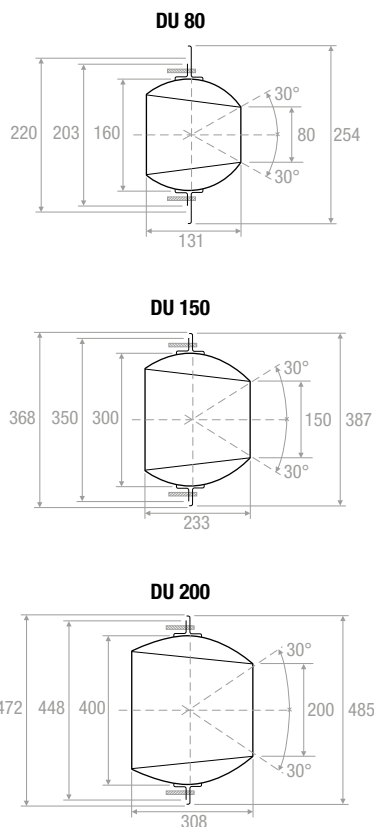


Montaggio su canale

Mounting on the duct




Montaggio su canale circolare


Mounting on the circular duct



Montaggio con tubo flessibile
Mounting by flexible duct



Montaggio in batteria
Mounting in battery



MISURE - MEASURES

Modello - Model	A	F	I
DU 80	200	207	300
DU 150	300	354	430
DU 200	350	452	430

DIAGRAMMA SCELTA RAPIDA - QUICK SELECTION DIAGRAM

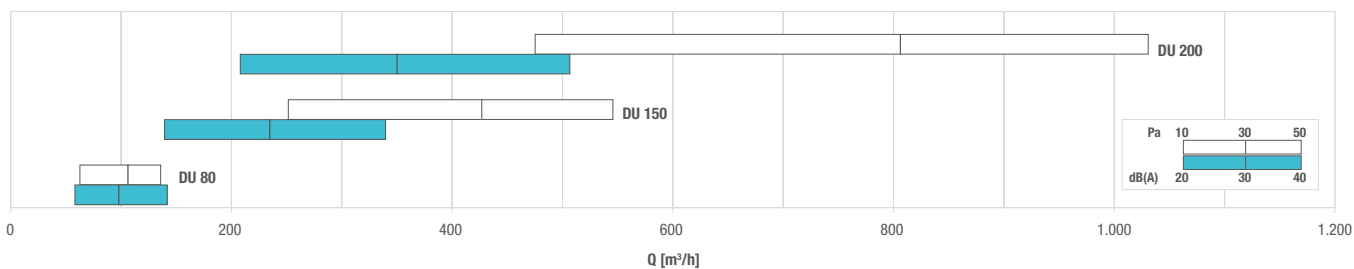


TABELLA DI SELEZIONE - SELECTION TABLE

Modello - Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) - Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
DU 80	0,0050	60	140	20	40	8,1	18,9	10	50
DU 150	0,0176	250	550	31	58	11,9	26,2	10	50
DU 200	0,0314	480	1030	38	69	14,0	30,1	10	50