



BQE3

Caratteristiche: diffusori a flusso elicoidale con getti regolabili.

Costruzione: acciaio verniciato bianco RAL 9016 opaco, deflettori in polipropilene nero RAL 9005.

Impiego a soffitto, in mandata e ripresa (senza deflettori). Altezza di installazione: 2,5-4,1 m.

Fissaggio: con viti laterali o a mezzo vite centrale su ponte di montaggio.

Accessori:

Plenum in acciaio zincato:

- Con o senza isolamento.
- Con o senza equalizzatore.
- Con o senza serranda di regolazione.
- Con o senza ponte di fissaggio.

Characteristics: swirl diffusers with adjustable throws.

Finishing: RAL 9016 white matt painted steel, deflection blades are made of polypropylene RAL 9005 black.

Utilization: for ceiling installation. For return air (without deflectors) or supply air. Installation height: 2,5-4,1 m.

Fixing: by using lateral screws or central screw on mounting bridge.

Accessories:


Galvanized steel plenum:

- With or without insulation.
- With or without air equalizer.
- With or without damper.
- With or without mounting bridge.


DISEGNI | DRAWINGS

BQE3Q


8 Feritoie | Slots




16 Feritoie | Slots




24 Feritoie | Slots




24 Feritoie | Slots




48 Feritoie | Slots



54 Feritoie | Slots




72 Feritoie | Slots




BQE3R


8 Feritoie | Slots




16 Feritoie | Slots




24 Feritoie | Slots




24 Feritoie | Slots




48 Feritoie | Slots



54 Feritoie | Slots




72 Feritoie | Slots




BQE3QR VERSIONE SU PANNELLO | PANEL VERSION


8 Feritoie | Slots



16 Feritoie | Slots



24 Feritoie | Slots



PLENUM | PLENUM



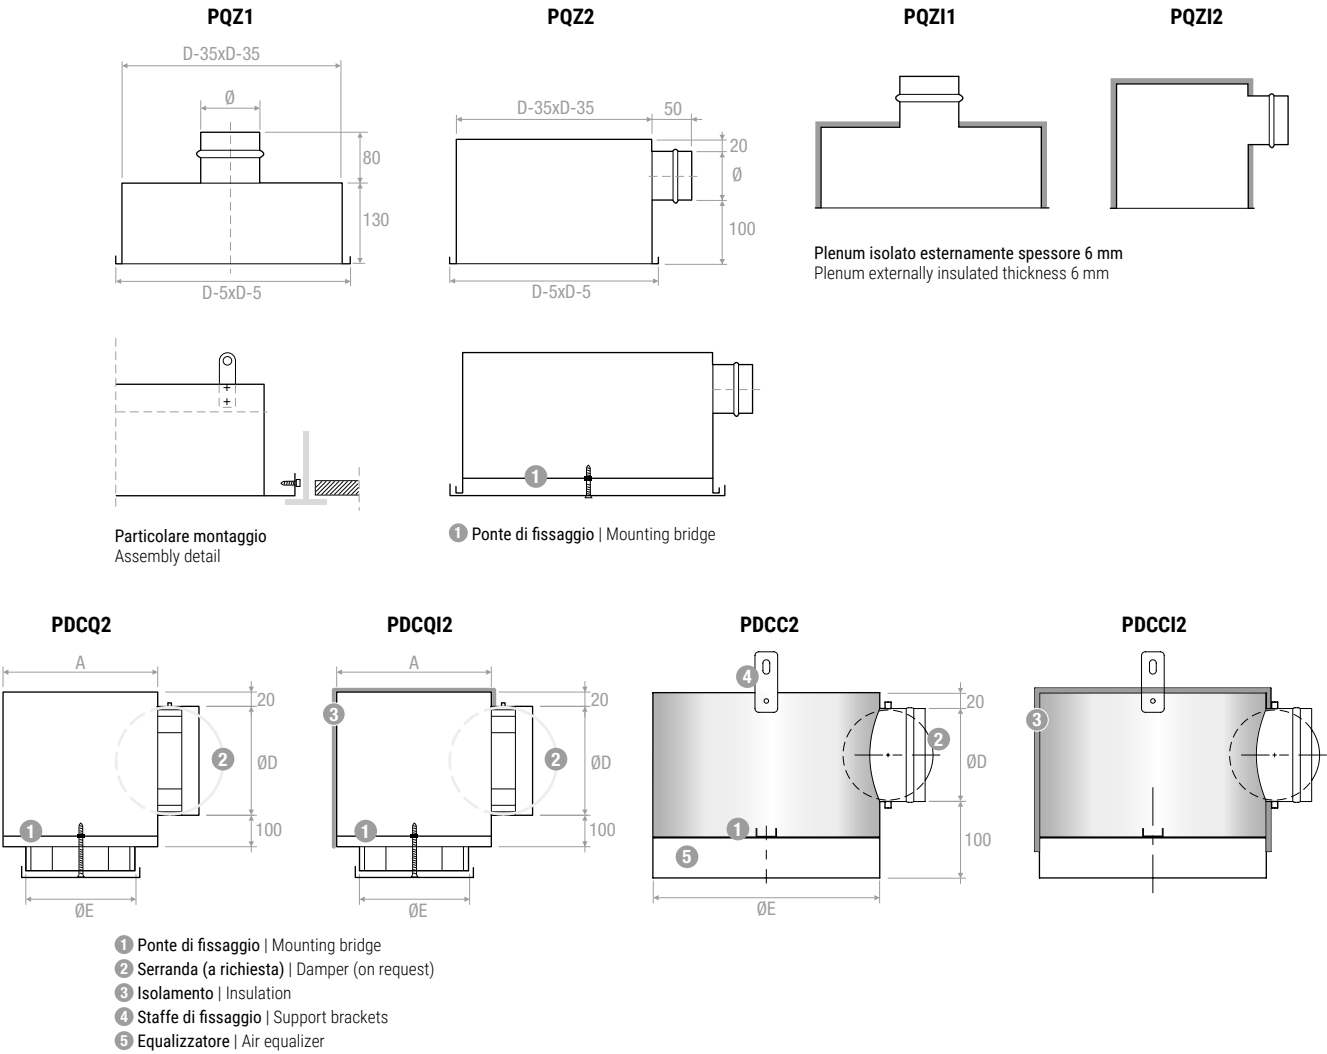


TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	A_x [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,20)}$ [m]		Dp_i [Pa]	
		min	max	min	max	min	max	min	max
BQE3QR 300x8	0,0095	150	300	32	54	1,8	3,5	10	50
BQE3QR 400x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 500x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 600x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 625x16	0,0189	270	520	30	48	2,2	4,3	10	50
BQE3QR 500x24	0,0284	370	720	28	45	2,5	4,9	10	50
BQE3QR 600x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR 625x24	0,0449	530	1040	26	42	2,9	5,6	10	50
BQE3QR 600x48	0,0568	640	1260	26	41	3,1	6,1	10	50
BQE3QR 625x54	0,0639	710	1380	25	40	3,2	6,3	10	50
BQE3QR 800x72	0,1017	1030	2010	24	37	3,7	7,2	10	50
BQE3QR 825x72	0,1017	1030	2010	24	37	3,7	7,2	10	50





VERSIONI DISPONIBILI | VERSIONS AVAILABLE

stock





	Ø D	D	BQE3Q	BQE3R
mm	mm	mm		
300x8	298	295x295		
400x16	398	395x395		
500x16	498	495x495		
600x8	598	595x595		
600x16	598	595x595		
625x16	623	620x620		
500x24	498	495x495		
600x24	598	595x595		
625x24	623	620x620		
600x48	598	595x595		
625x54	623	620x620		
800x72	798	795x795		
825x72	823	820x820		

PLENUM BQE3Q





AxB	Attacco Spigot	PQZ1	PQZ11	PQZ2	PQZ12	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Mounting bridge
mm	Ø mm							
300	123							
400	148							
500	198							
600	248							
625	298							
800	348							
825	348							

PLENUM BQE3R



Ø	Plenum zincato Galvanized plenum			PDCQ2	PDCQ12	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Mounting bridge
	A	Ø D	Ø E					
mm	mm	mm	mm					
298	400	123	300					
398	500	148	390					
498	600	198	490					
598	700	248	590					
623	700	298	615					
798	900	348	790					

PLENUM BQE3R



Ø	Plenum zincato Galvanized plenum		PDCC2	PDCC12	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Mounting bridge
	Ø D	Ø E					
mm	mm	mm					
298	123	300					
398	148	390					
498	198	490					
598	248	590					
623	298	615					
798	348	790					