


BQF

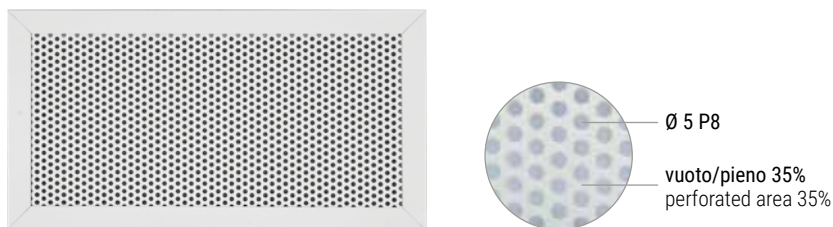

Caratteristiche: griglie di ripresa a schermo forellato.

Costruzione: telaio in alluminio verniciato bianco RAL 9016 opaco. Schermo in lamiera di acciaio verniciato bianco RAL 9016 opaco.

Impiego: a parete, in ripresa.

Fissaggio: con clips o su richiesta con fori per viti frontali.

Accessori:

- Plenum in acciaio zincato: con o senza isolamento.
- Serranda di taratura in acciaio zincato con alette a funzionamento contrapposto.
- Controtelaio di montaggio in acciaio zincato.

Characteristics: perforated return air grilles.

Finishing: frame made of RAL 9016 white matt painted aluminium. Panel made of RAL 9016 white matt painted steel.

Utilization: for wall installation and for air intake.

Fixing: by using clips or through hole on demand.


Accessories:

- Galvanized steel plenum: With or without insulation.
- Calibration damper made of galvanized steel and opposed blades.
- Mounting frames made of galvanized steel sheet.

VERNICIATURA | PAINTING





Colori RAL 9010 lucido: + 15%. Per altre misure e RAL prezzi su richiesta
Color RAL 9010 glossy: + 15%. Other sizes and RAL colors: prices on request

DISEGNI | DRAWINGS

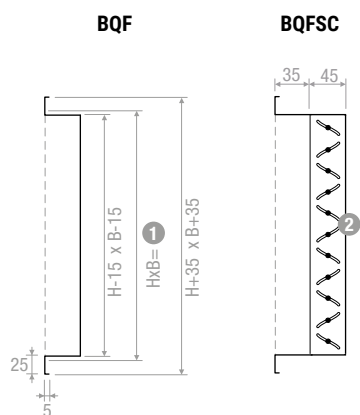

- ① Dimensioni foro | Hole dimension
② Serranda di taratura | Opposed blade damper

PLENUM | PLENUM



Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm



BQF

TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	A _x [m²]	Q [m³/h]		L _{WA} [dB(A)]		Dp _t [Pa]	
		min	max	min	max	min	max
BQF 200x200	0,0136	60	130	-	21	10	50
BQF 300x200	0,0204	80	190	-	22	10	50
BQF 400x200	0,0272	110	260	-	23	10	50
BQF 500x200	0,034	140	320	-	23	10	50
BQF 600x200	0,0408	170	380	-	25	10	50
BQF 800x200	0,0544	230	510	-	25	10	50
BQF 1000x200	0,068	280	640	-	26	10	50
BQF 300x300	0,0305	120	260	-	21	10	50
BQF 400x300	0,0422	160	360	-	22	10	50
BQF 500x300	0,0543	200	460	-	23	10	50
BQF 600x300	0,0668	250	560	-	23	10	50
BQF 800x300	0,0924	350	780	-	25	10	50
BQF 1000x300	0,1190	450	1000	-	26	10	50
BQF 400x400	0,0584	220	490	-	23	10	50
BQF 500x400	0,0752	280	630	-	24	10	50
BQF 600x400	0,0924	350	780	-	25	10	50
BQF 800x400	0,1280	480	1070	-	26	10	50
BQF 1000x400	0,1647	620	1380	-	27	10	50
BQF 500x500	0,0968	360	810	-	25	10	50
BQF 600x500	0,1190	450	1000	-	26	10	50
BQF 800x500	0,1647	620	1380	-	27	10	50
BQF 1000x500	0,2120	790	1770	-	28	10	50
BQF 600x600	0,1462	550	1220	-	26	10	50
BQF 800x600	0,2025	760	1690	-	27	10	50
BQF 1000x600	0,2606	980	2180	-	28	10	50



VERSIONI DISPONIBILI | VERSIONS AVAILABLE

							
BxH	BQF	SC	CT	PBZ1	PBZ11	PBZ2	PBZ12
mm							
200x200							
300x200							
400x200							
500x200							
600x200							
800x200							
1000x200							
300x300							
400x300							
500x300							
600x300							
800x300							
1000x300							
400x400							
500x400							
600x400							
800x400							
1000x400							
500x500							
600x500							
800x500							
1000x500							
600x600							
800x600							
1000x600							